


ZETTLER MAGNETICS CO., LTD.

5W SINGLE OUTPUT MINI SERIES AC-DC POWER MODULE (P-S ISOLATED)

FEATURES

- Input Range 100-240VAC 50/60Hz
- Output range from 3.3V-24VDC
Also can be customized
- Switching Power Module For PCB Mount
- Encapsulated Design Prevent dust and humidity
- Self-Extinguishing Plastic 94V-0
- High efficiency, Low Temperature Rise
- Dielectric Strength 3600VAC
- Integrated perfect Protection
Low standby power and Leakage Current
- Integrated EMC network
- Dielectric Strength: 3600Vac 5mA1min
- Protection: OLP: Output over load protection
OSP: Output short protection
OTP: Over temperature protection
- Compact Size
- UL, TUV Approved

OUTLINE DIMENSIONS

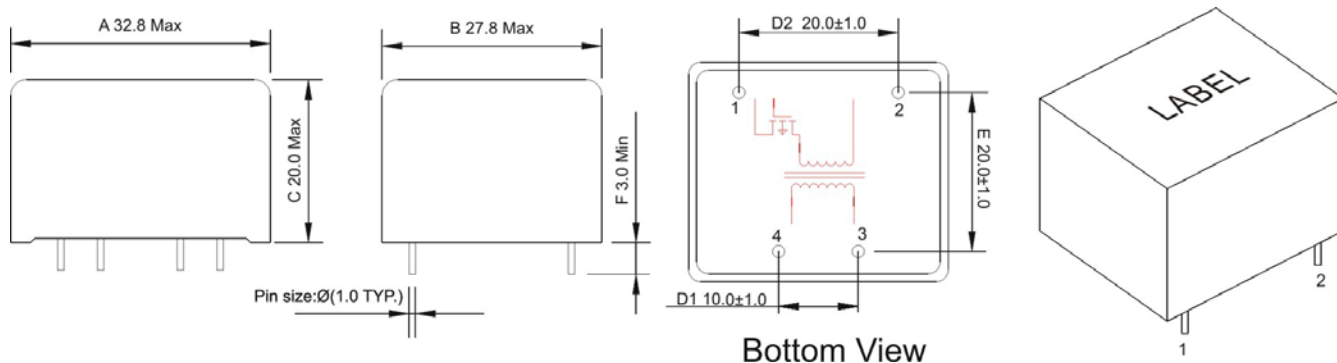

ELECTRONIC SPECIFICATIONS

Order Number	Leakage Current (mA)	No load Loss (W)	Output Voltage (VDC.)	Output Current (mA)	Voltage Accuracy	Ripple	Noise	Ambient TEMP (°C)	Weight	Certificate		
										TUV	UL	CE
ZP05S0300WB	0.1mA	0.15W	3.3V	1515	±5%	<5% Vout	<5% Vout	50	35g		●	●
ZP05S0500WB	0.1mA	0.15W	5V	1000	±5%	<5% Vout	<5% Vout	50	35g		●	●
ZP05S0700WB	0.1mA	0.15W	7V	714	±5%	<5% Vout	<5% Vout	50	35g		●	●
ZP05S0800WB	0.1mA	0.15W	8V	625	±5%	<5% Vout	<5% Vout	50	35g		●	●
ZP05S0900WB	0.1mA	0.15W	9V	555	±5%	<5% Vout	<5% Vout	50	35g		●	●
ZP05S1000WB	0.1mA	0.15W	10V	500	±5%	<5% Vout	<5% Vout	50	35g		●	●
ZP05S1200WB	0.1mA	0.15W	12V	417	±5%	<5% Vout	<5% Vout	50	35g		●	●
ZP05S1500WB	0.1mA	0.15W	15V	333	±5%	<5% Vout	<5% Vout	50	35g		●	●
ZP05S1800WB	0.1mA	0.15W	18V	278	±5%	<5% Vout	<5% Vout	50	35g		●	●
ZP05S2400WB	0.1mA	0.15W	24V	208	±5%	<5% Vout	<5% Vout	50	35g		●	●