


6		5		
ITEM	PART#	DESCRIPTION	QTY	UOM
A	512160200	2.0 WtB Rec Hsg 2Ckt	1	PC
B	593708000	2.0 WtB Crimp Rec Chn	2	PC
C	----	WHITE PART ID LABEL	1	PC

2		1	
FROM	TO	DESCRIPTION	COLOUR
A1	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X22AWG DISC SR-PVC BK UL10002	BLACK

PART NUMBER	TITLE	L1	L2(REF)
2244831020	MicroTPA 2.0 R-S 2ckt 50mm disc Sn	50±5	15
2244831021	MicroTPA 2.0 R-S 2ckt 100mm disc Sn	100±5	15
2244831022	MicroTPA 2.0 R-S 2ckt 150mm disc Sn	150±5	15
2244831023	MicroTPA 2.0 R-S 2ckt 300mm disc Sn	300±5	15
2244831024	MicroTPA 2.0 R-S 2ckt 600mm disc Sn	600±5	15

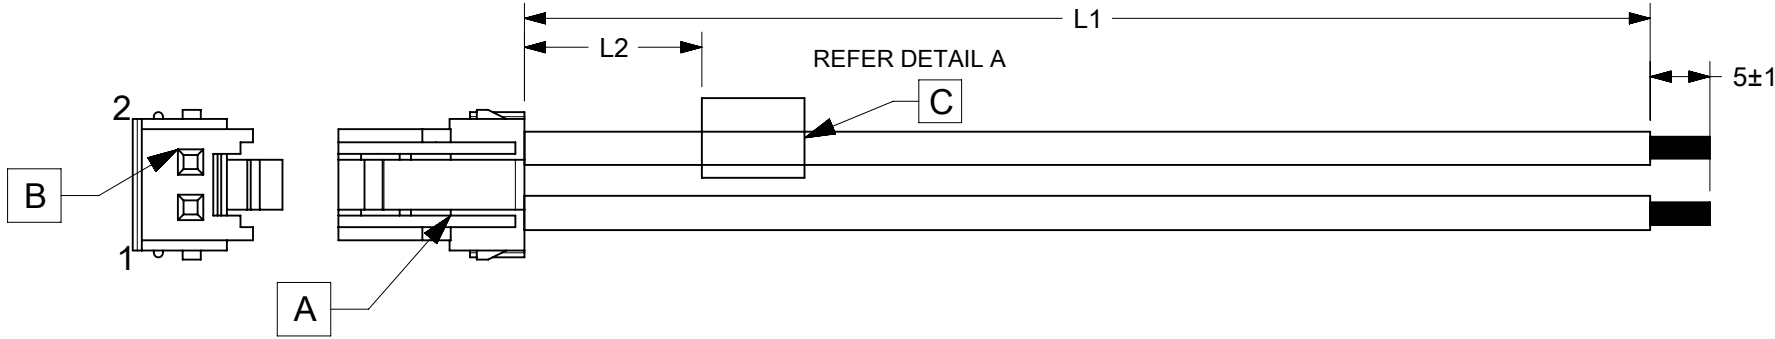

- NOTES:
1. CABLE ASSEMBLY MUST PASS 100% CONTINUITY AND POLARITY TEST.
 2. CONNECTOR VIEW SHOWN FROM MATING SIDE.
 - 3.LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
 - 4.LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.
 - 5.TINNING SHOULD BE DONE WITH LEAD FREE SOLDER BAR ONLY.
 - 6.FREE ENDS MUST BE STRIPPED,TWISTED &TINNED.THE LENGTH OF TINNING IS 5±1MM.TINNING DIA MUST BE 0.90 MM MAX.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2023/01/04	A	INITIAL RELEASE	THANUB
RELEASE STATUS	P1	RELEASE DATE	2023/02/08 09:35:32

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
	mm	NTS
	GENERAL TOLERANCES (UNLESS SPECIFIED)	
DIVISIONAL SYMBOLS	ANGULAR TOL	± °
	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
	1 PLACE	±
	0 PLACES	±
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION
	DRAWING	SERIES
A4-SIZE		224483
MATERIAL NUMBER		CUSTOMER
SEE TABLE		GENERAL MARKET
SHEET NUMBER		1 OF 1

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2244831020	PSD	000	A