

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	EV2SC3356-XXX-S1
▶ Overseas	Part Number	2SC3356-XXX
▶ Equivalent	Part Number	2SC3356-XXX

"S1" means SOT-23

EV is the abbreviation of name EVVO

■ NPN Transistors


■ Features

- Low noise and high gain.

NF = 1.1 dB Typ., Ga = 11 dB Typ. @V_{CE} = 10 V, I_C = 7 mA, f = 1.0 GHz

- High power gain.

MAG = 13 dB Typ. @V_{CE} = 10 V, I_C = 20 mA, f = 1.0 GHz

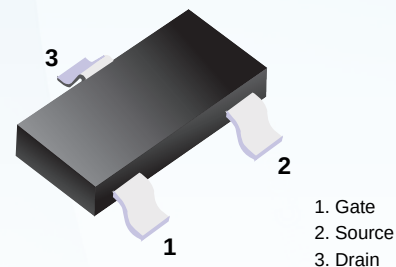

■ Simplified outline(SOT23)

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector to base voltage	V _{CBO}	20	V
Collector to emitter voltage	V _{CEO}	12	V
Emitter to base voltage	V _{EB0}	3.0	V
Collector current (DC)	I _C	100	mA
Total power dissipation	P _{tot}	200	mW
Junction temperature	T _j	150	°C
Storage temperature range	T _{stg}	-65 to +150	°C

■ Electrical Characteristics Ta = 25°C







Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V _{CBO}	I _C = 100 μA, I _E = 0	20			V
Collector- emitter breakdown voltage	V _{CEO}	I _C = 1 mA, I _B = 0	12			
Emitter - base breakdown voltage	V _{EB0}	I _E = 100 μA, I _C = 0	3			
Collector-base cut-off current	I _{CBO}	V _{CB} = 10 V, I _E = 0			1	μA
Emitter cut-off current	I _{EB0}	V _{EB} = 3V, I _C =0			1	
Collector-emitter saturation voltage *	V _{CE(sat)}	I _C =50 mA, I _B =5mA			0.4	V
Base - emitter saturation voltage *	V _{BE(sat)}	I _C =50 mA, I _B =5mA			1.2	
DC current gain *	h _{FE}	V _{CE} = 10V, I _C = 20mA	50		400	
Insertion power gain	S _{21e} ²	V _{CE} = 10 V, I _C = 20 mA, f= 1GHz		11.5		dB
Noise figure	NF	V _{CE} = 10 V, I _C = 7 mA, f= 1GHz		1.1	2	
Reverse transfer capacitance	C _{re}	V _{CB} = 10V, I _E = 0, f=1MHz		0.55	1	
Transition frequency	f _r	V _{CE} = 10V, I _C = 20mA		7		GHz

*. Pulse measurement: PW ≤ 350 μs, Duty Cycle ≤ 2%.



■ hFE Classification

Type	2SC3356-R23	2SC3356-R24	2SC3356-R25	2SC3356-R26
Range	50-100	80-160	125-250	250-400
Marking	R23	R24	R25	R26


■ Typical Characteristics

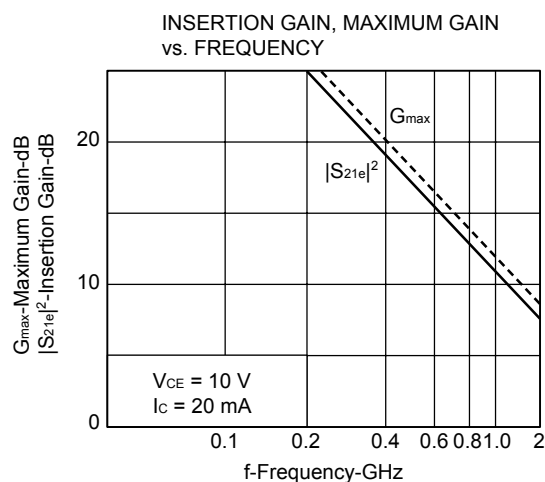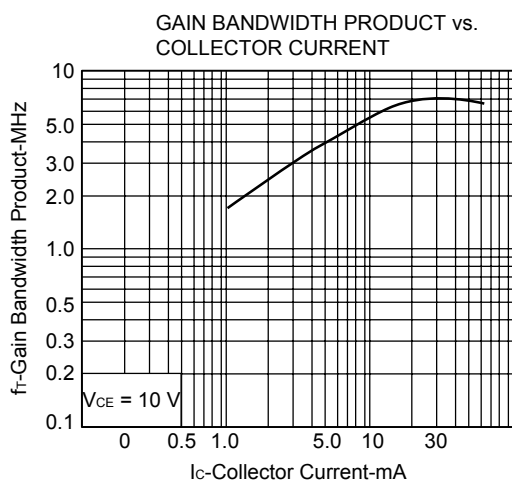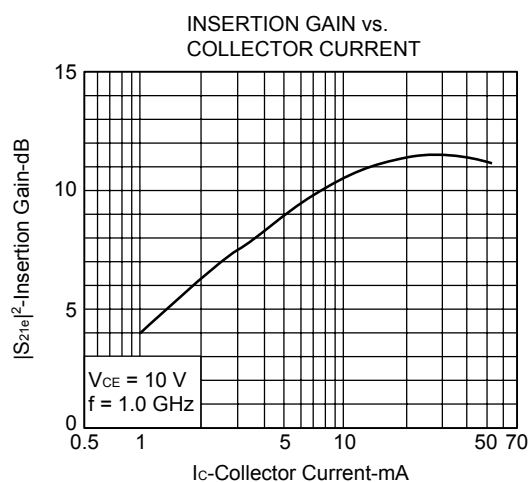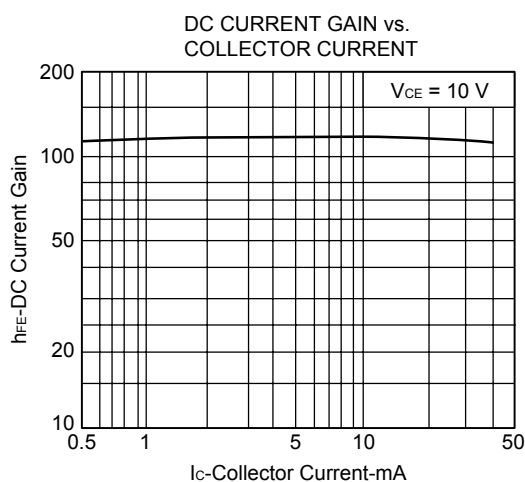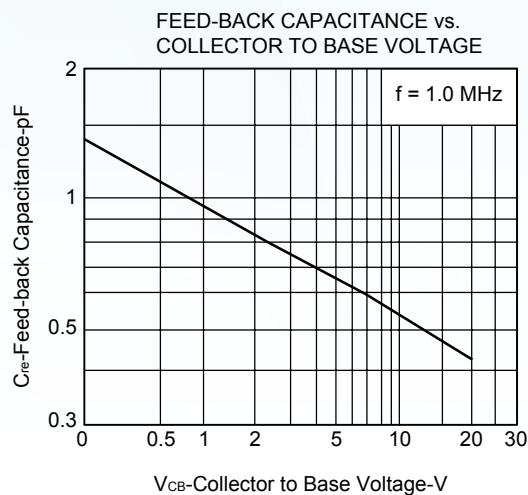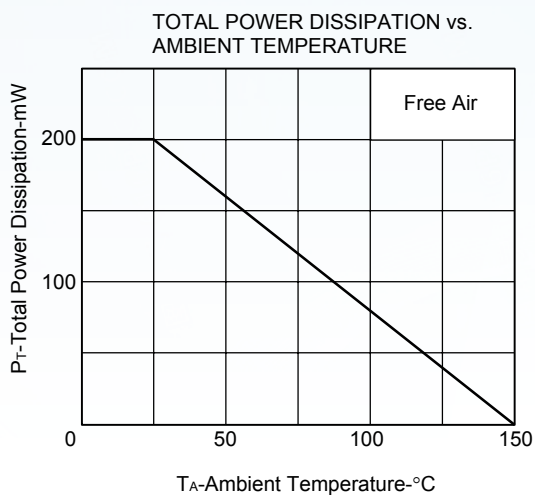


■ Typical Characteristics

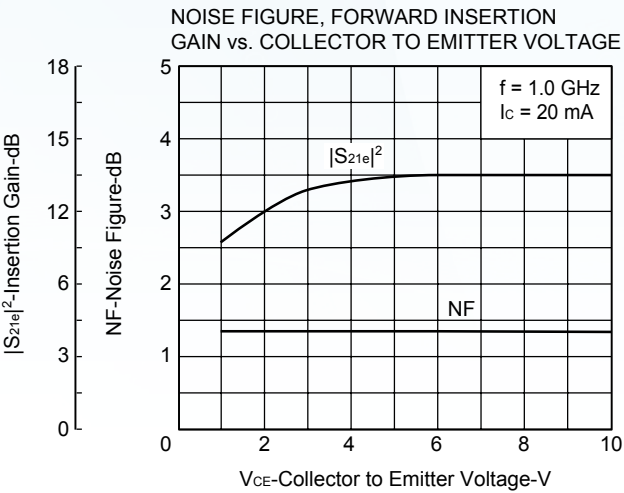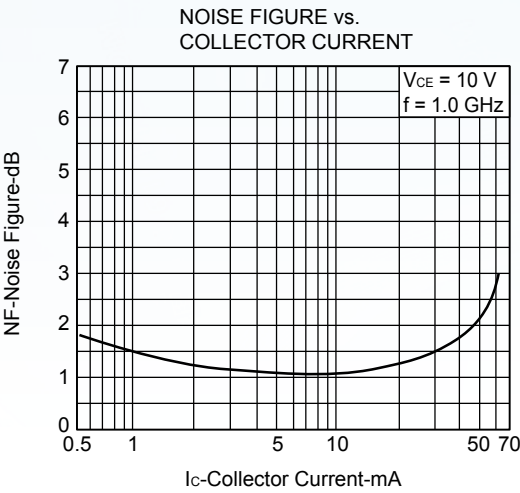


S_{11e} , S_{22e} -FREQUENCY
CONDITION $V_{CE} = 10\text{ V}$
200 MHz Step

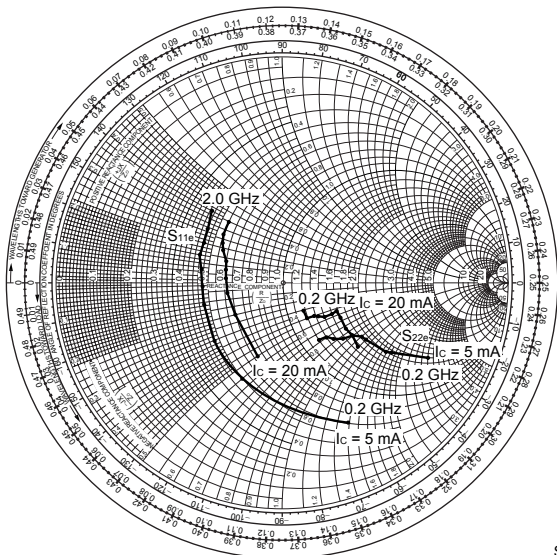


S_{21e} -FREQUENCY
CONDITION $V_{CE} = 10\text{ V}$
 $I_c = 20\text{ mA}$

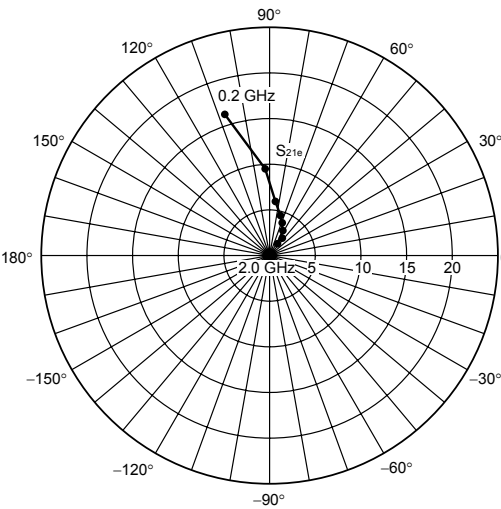

S_{12e} -FREQUENCY
CONDITION $V_{CE} = 10\text{ V}$
 $I_c = 20\text{ mA}$

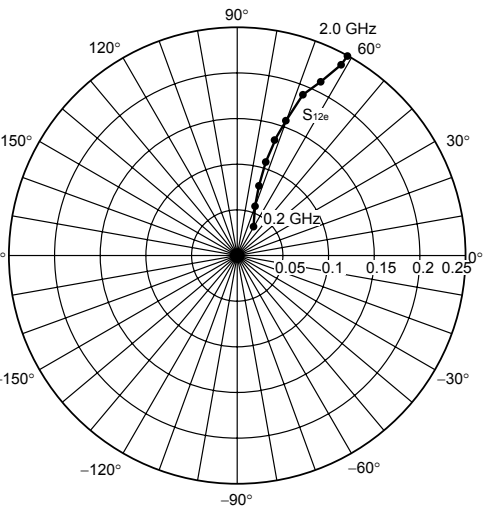

■ SOT-23

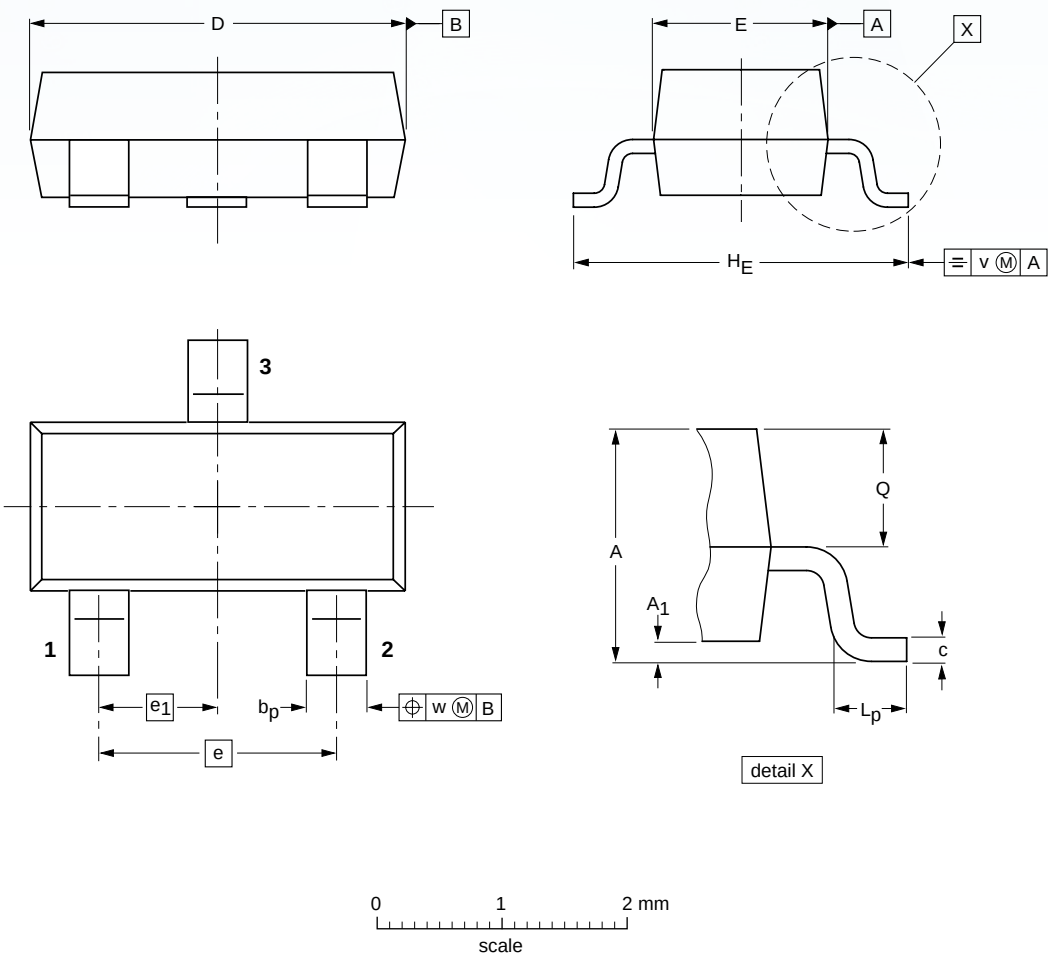

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ max.	b _p	c	D	E	e	e ₁	H _E	L _p	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.