

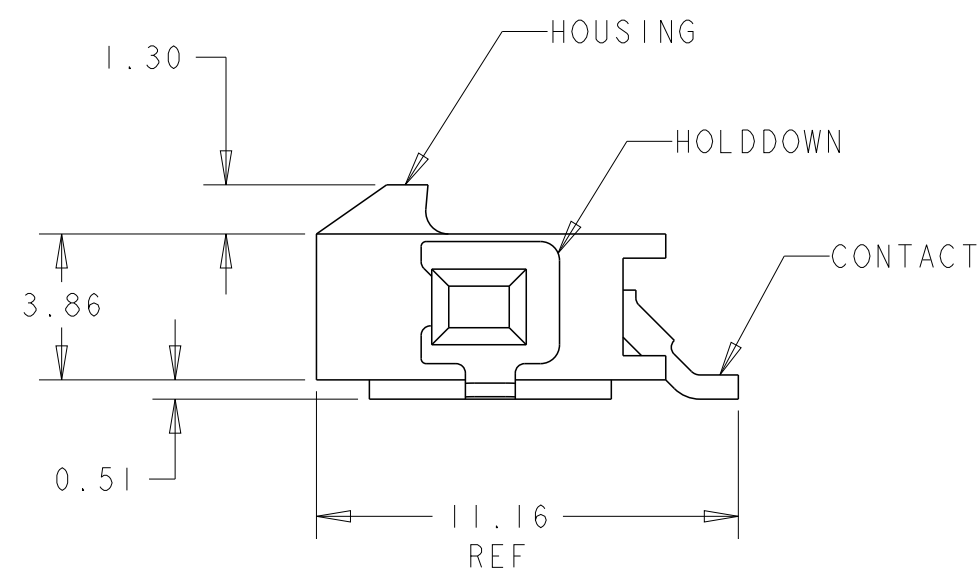


| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | C3  | REVISED PER ECR-16-011494 | 20JUN2017 | NK  | CX   |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |

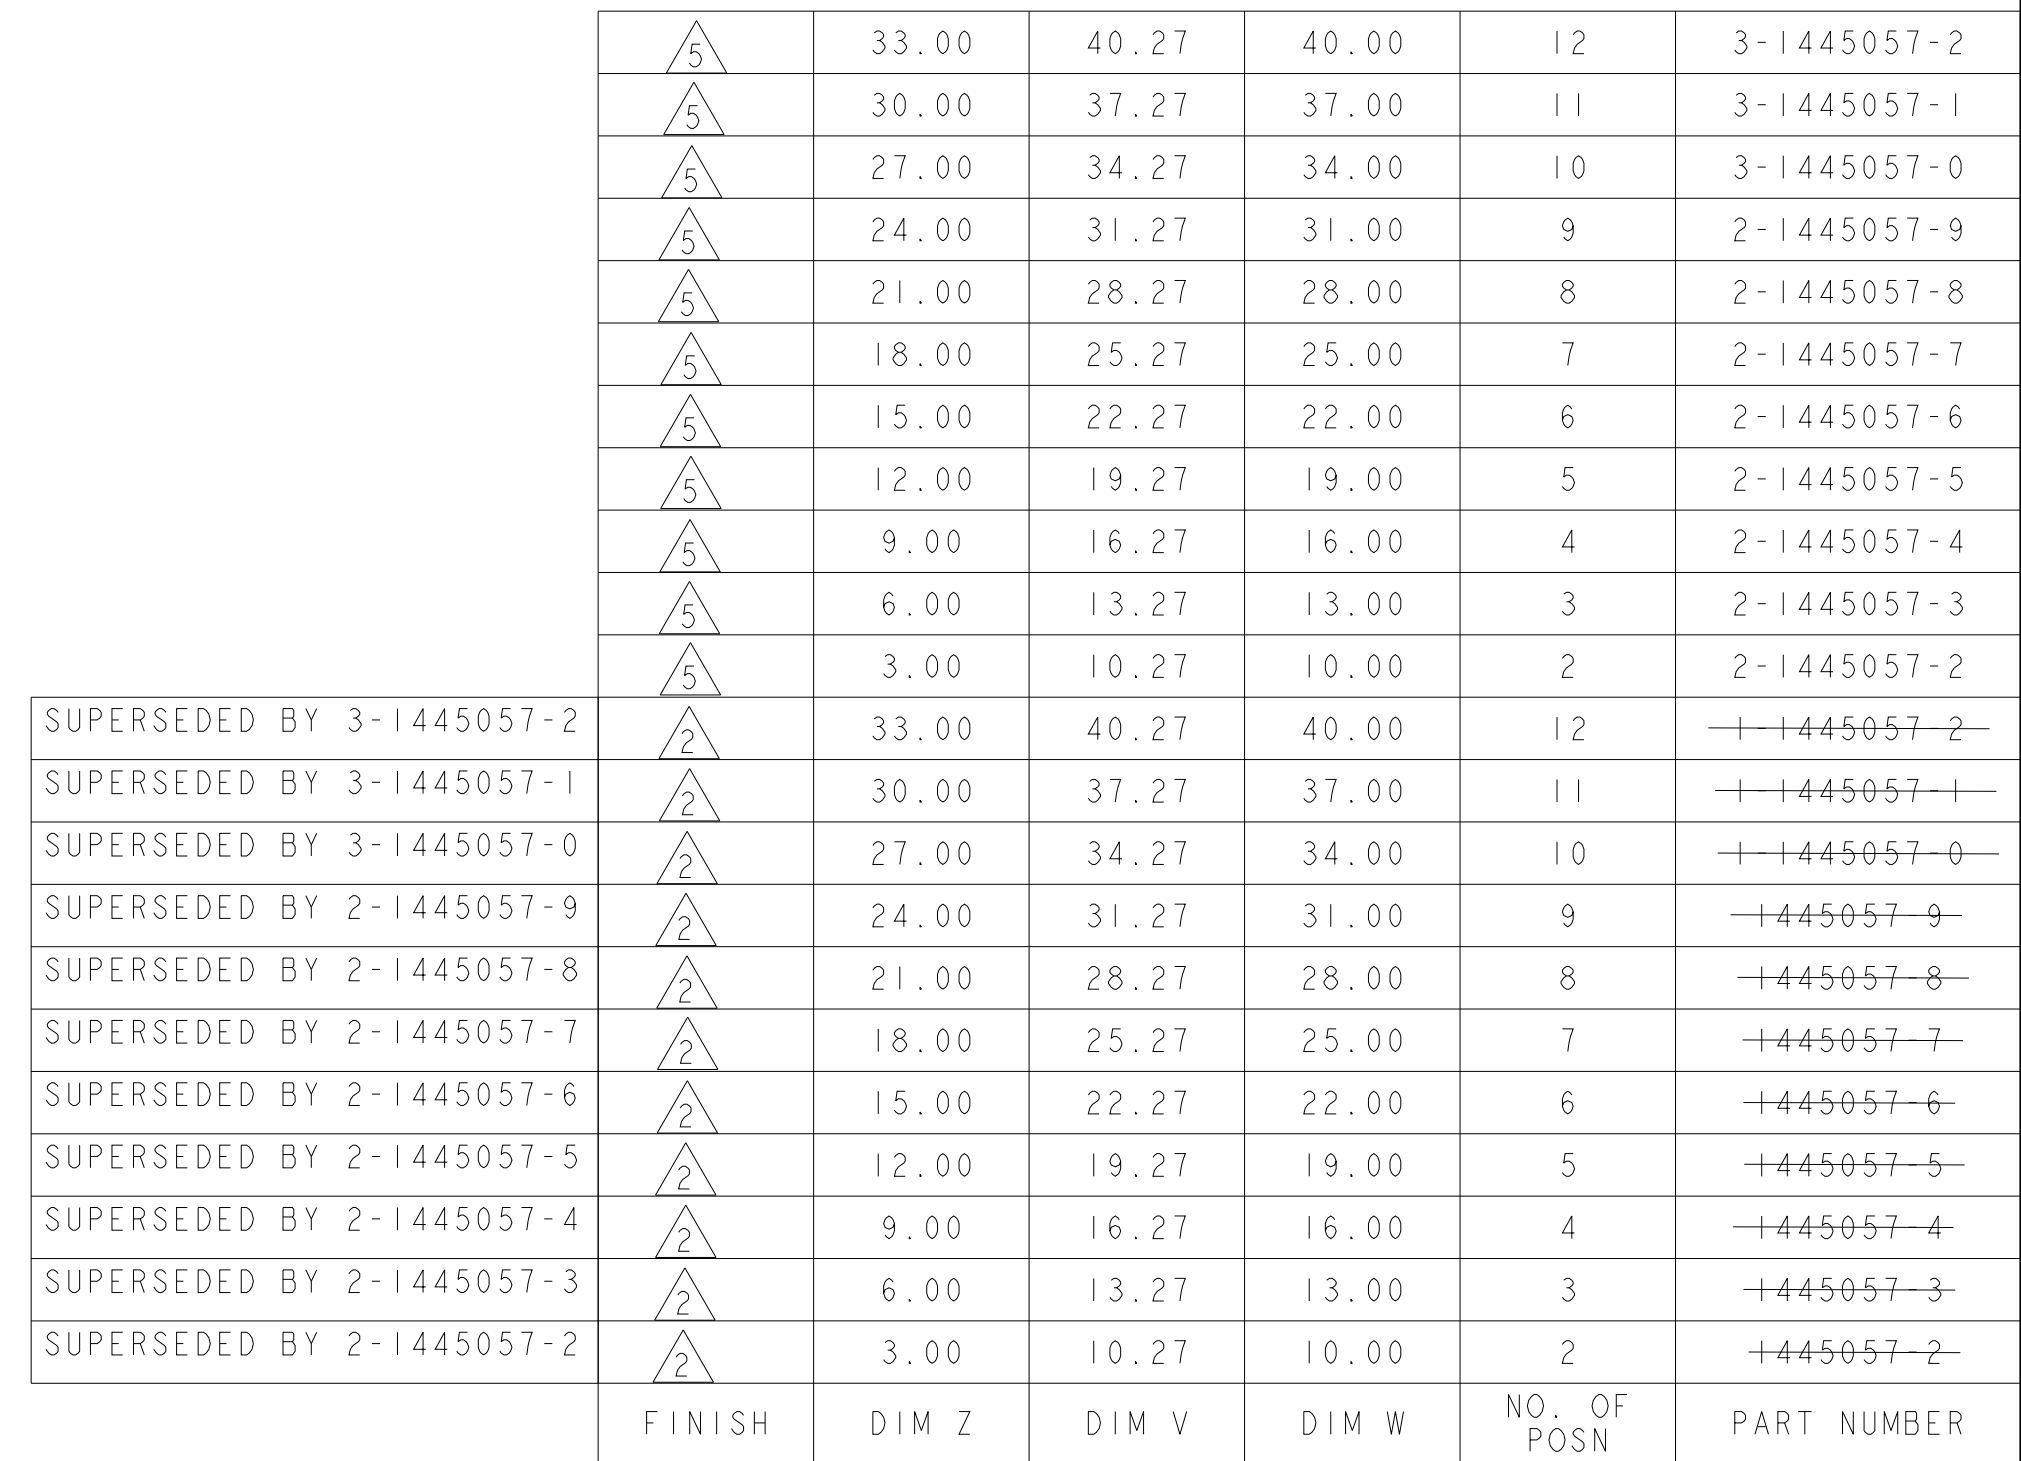

2 PLATING: CONTACTS- 2.54μm MINIMUM TIN LEAD OVER 1.27μm MINIMUM NICKEL.  
HOLDDOWNS- 2.54μm MINIMUM TIN-LEAD OVER 1.27μm MINIMUM NICKEL.

5 PLATING: CONTACTS-2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.  
HOLDDOWNS- 2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.

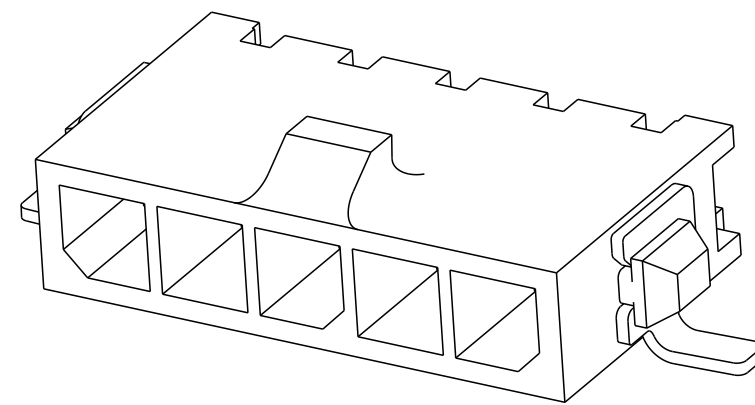

|                                                                                                                    |  |                                    |  |                                                                                                                      |                    |
|--------------------------------------------------------------------------------------------------------------------|--|------------------------------------|--|----------------------------------------------------------------------------------------------------------------------|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                                             |  | DWN<br>J. ROOT<br>03-OCT-2000      |  |  TE Connectivity                |                    |
| DIMENSIONS:                                                                                                        |  | CHG<br>K. WHITAKER<br>13-MAR-2001  |  | NAME<br>RT ANGLE SURFACE MOUNT HEADER ASSY,<br>TIN CONTACTS W/SURF MOUNT HOLDDOWNS,<br>SINGLE ROW, MICRO MATE-N-LOK™ |                    |
| mm                                                                                                                 |  | APVD<br>K. WHITAKER<br>13-MAR-2001 |  |                                                                                                                      |                    |
|                               |  | PRODUCT SPEC<br>108-1836           |  |                                                                                                                      |                    |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ±.<br>1 PLC ±.<br>2 PLC ±0.13<br>3 PLC ±.<br>4 PLC ±.<br>ANGLES ±. |  | APPLICATION SPEC<br>114-13000      |  |                                                                                                                      |                    |
| MATERIAL                                                                                                           |  | WEIGHT<br>-                        |  | SIZE<br>A2                                                                                                           | RESTRICTED TO<br>- |
|  SEE TABLE                    |  | CUSTOMER DRAWING                   |  | SCALE<br>5:1                                                                                                         | SHEET<br>OF<br>1   |
|                                                                                                                    |  |                                    |  | C=1445057                                                                                                            | REV<br>C3          |

PCB LAYOUT COMPONENT SIDE 

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1445057-0](#)