


FLORENCE-3R-IP-O

~85° + 40° oval beam


TECHNICAL SPECIFICATIONS:

Dimensions	321.0 x 79.0 mm
Height	9.4 mm
Fastening	screw
Colour	clear
Box size	356 x 356 x 292 mm
Box weight	13 kg
Quantity in Box	80 pcs
ROHS compliant	yes ⓘ

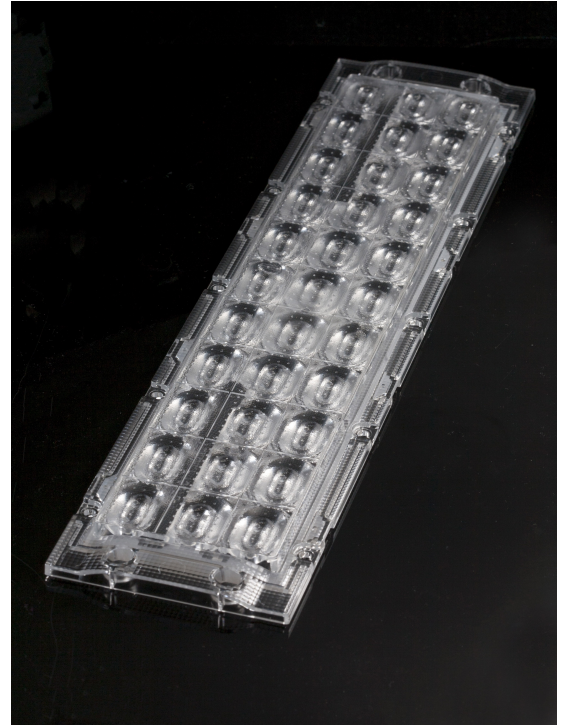

MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
FLORENCE-3R-IP-O	Linear lens	PC	
FLORENCE-3R-IP-SEAL	Seal	Silicone	clear

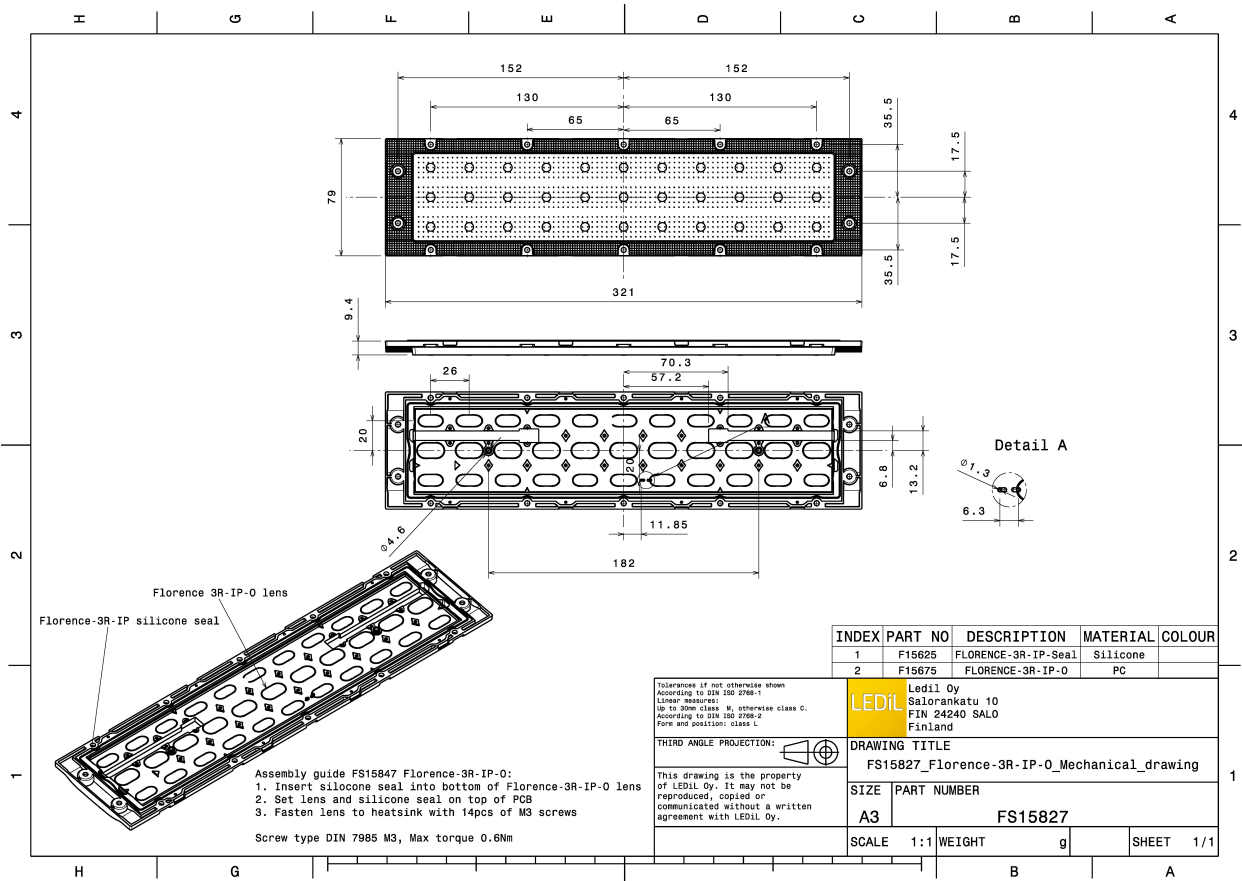

PHOTOMETRIC DATA (MEASURED):



LG Innotek

LED LG 6030
FWHM 83.0 + 40.0°
Efficiency 85 %
Peak intensity 0.700 cd/lm
LEDs/each optic 1
Light colour White
Required components:

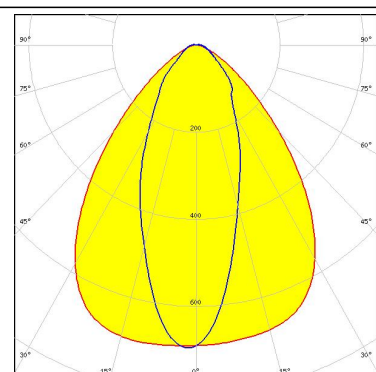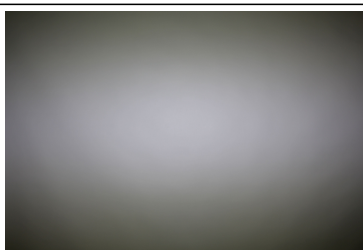



LUMILEDS

LED LUXEON 5050 Round LES
FWHM 86.0 + 72.0°
Efficiency 86 %
Peak intensity 0.470 cd/lm
LEDs/each optic 1
Light colour White
Required components:

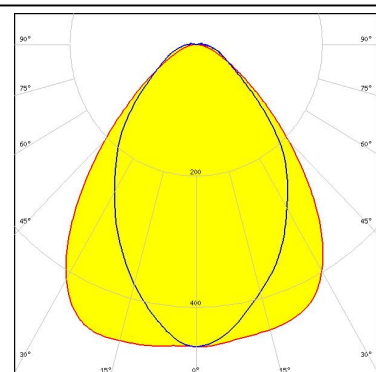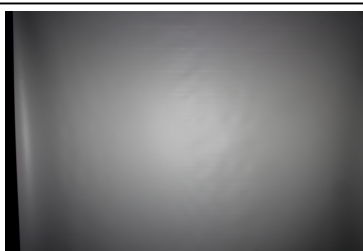



OSRAM

LED PLG2-BAR-1100-xxx-280x55-DC
FWHM 84.0 + 40.0°
Efficiency 86 %
Peak intensity 0.680 cd/lm
LEDs/each optic 1
Light colour White
Required components:




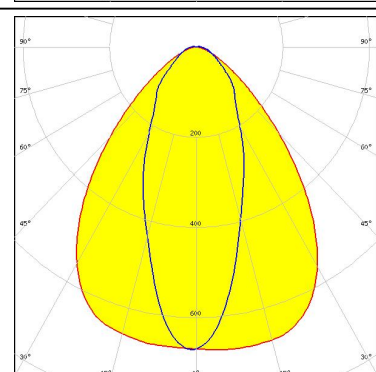
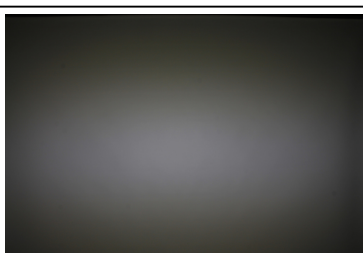


OSRAM Opto Semiconductors

LED Duris S2
FWHM 88.0 + 33.5°
Efficiency 81 %
Peak intensity 0.621 cd/lm
LEDs/each optic 1
Light colour White
Required components:

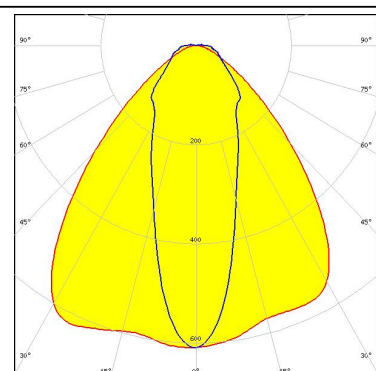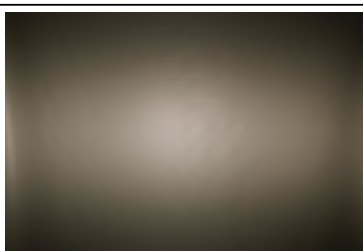


PHOTOMETRIC DATA (MEASURED):

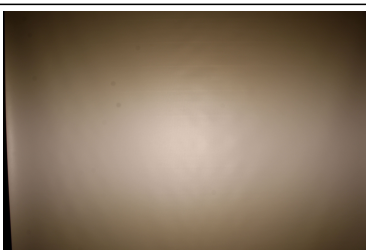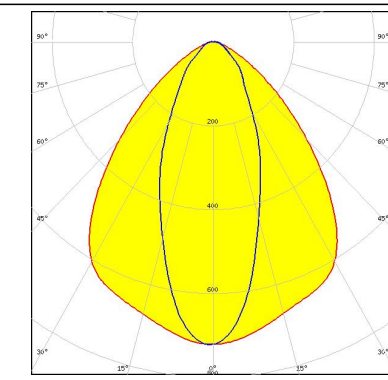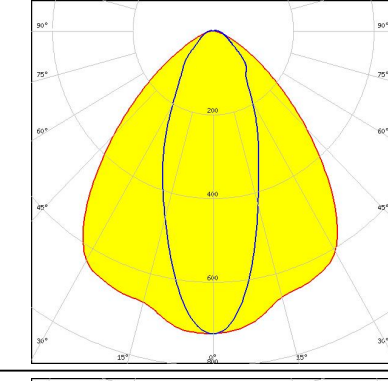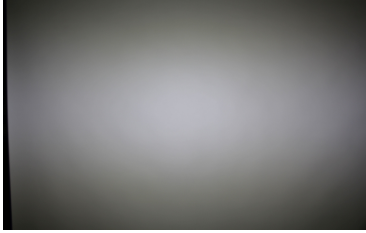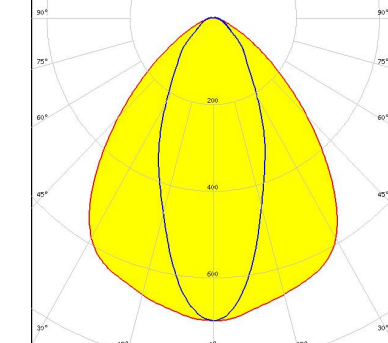SEOUL SEOUL SEMICONDUCTOR LED SEOUL 5630C FWHM 87.0 + 41.0° Efficiency 87 % Peak intensity 0.720 cd/lm LEDs/each optic 1 Light colour White Required components:		
SEOUL SEOUL SEMICONDUCTOR LED SEOUL DC 3030 FWHM 88.0 + 39.0° Efficiency 88 % Peak intensity 0.720 cd/lm LEDs/each optic 1 Light colour White Required components:		
TRIDONIC LED LLE G2 55x280mm 2000lm FWHM 87.0 + 43.0° Efficiency 88 % Peak intensity 0.700 cd/lm LEDs/each optic 1 Light colour White Required components:		


PHOTOMETRIC DATA (SIMULATED):




LED LG 3528
FWHM 89.0 + 40.0°
Efficiency 92 %
Peak intensity 0.777 cd/lm
LEDs/each optic 1
Light colour White
Required components:

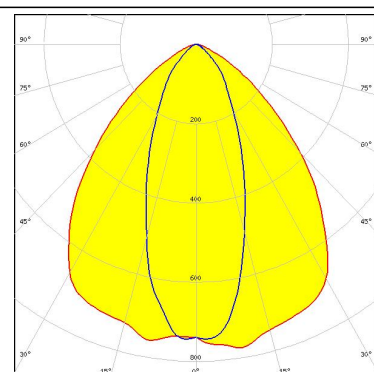


LED LUXEON CZ
FWHM 89.0 + 30.0°
Efficiency 87 %
Peak intensity 0.890 cd/lm
LEDs/each optic 1
Light colour White
Required components:

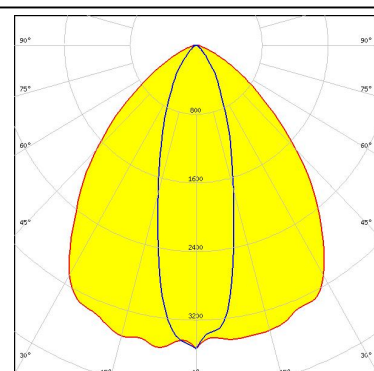

LED NF2x757D
FWHM 86.0 + 34.0°
Efficiency 87 %
Peak intensity 0.780 cd/lm
LEDs/each optic 1
Light colour White
Required components:

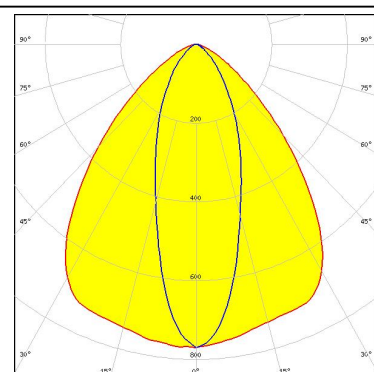

LED Duris S10
FWHM 84.0 + 70.0°
Efficiency 86 %
Peak intensity 0.490 cd/lm
LEDs/each optic 1
Light colour White
Required components:

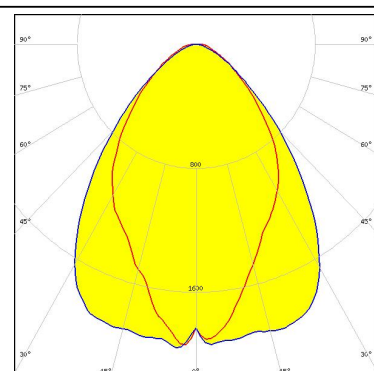


PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED Duris S8
FWHM 84.0 + 51.0°
Efficiency 88 %
Peak intensity 0.620 cd/lm
LEDs/each optic 1
Light colour White
Required components:

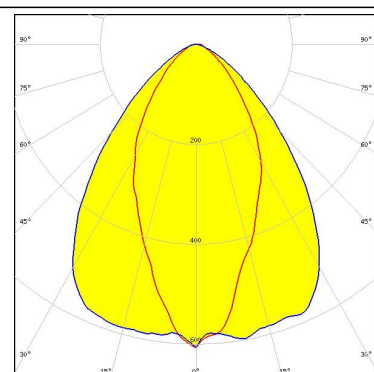

OSRAM


Opto Semiconductors

LED OSCONIQ P 3030
FWHM 32.0 + 85.0°
Efficiency 89 %
Peak intensity 0.890 cd/lm
LEDs/each optic 1
Light colour White
Required components:

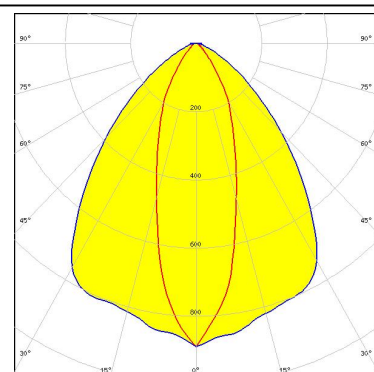


SAMSUNG

LED LM302B
FWHM 82.0 + 28.0°
Efficiency 86 %
Peak intensity 0.920 cd/lm
LEDs/each optic 1
Light colour White
Required components:

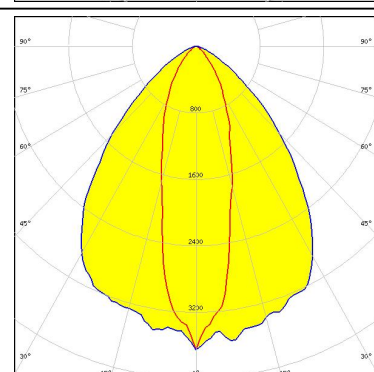

SAMSUNG


LED LM302Z
FWHM 73.0 + 27.0°
Efficiency 88 %
Peak intensity 0.960 cd/lm
LEDs/each optic 2
Light colour White
Required components:

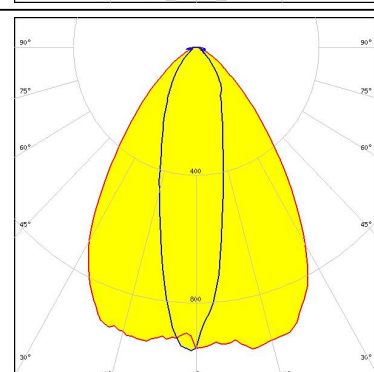

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED LM302Z
FWHM 82.0 + 25.0°
Efficiency 88 %
Peak intensity 0.910 cd/lm
LEDs/each optic 1
Light colour White
Required components:

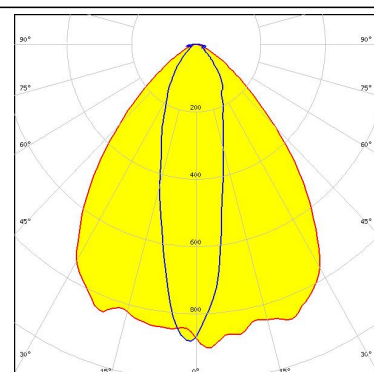


SAMSUNG

LED LM561B Plus
FWHM 82.0 + 28.0°
Efficiency 86 %
Peak intensity 0.930 cd/lm
LEDs/each optic 1
Light colour White
Required components:

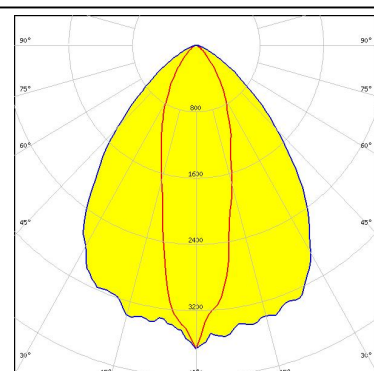


SEOUL SEMICONDUCTOR

LED SEOUL DC 3030C
FWHM 84.0 + 30.0°
Efficiency 92 %
Peak intensity 0.895 cd/lm
LEDs/each optic 1
Light colour White
Required components:


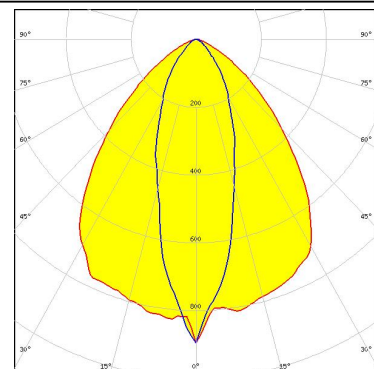


SEOUL SEMICONDUCTOR

LED SEOUL DC 3528
FWHM 87.0 + 31.0°
Efficiency 88 %
Peak intensity 0.840 cd/lm
LEDs/each optic 1
Light colour White
Required components:

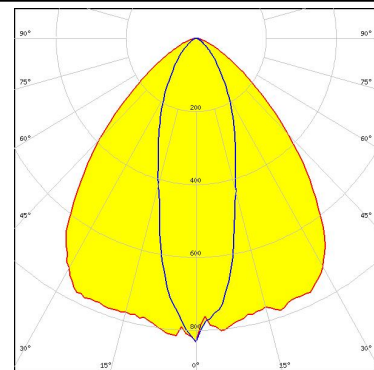

PHOTOMETRIC DATA (SIMULATED):

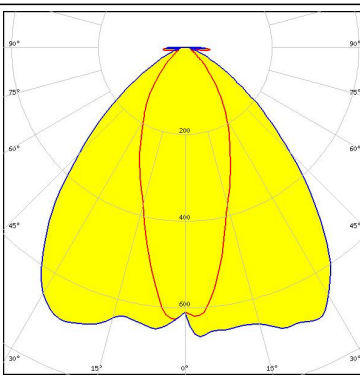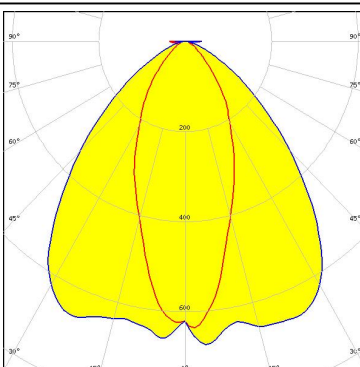 SEOUL SEMICONDUCTOR LED Z8Y22 FWHM 90.0 + 40.0° Efficiency 92 % Peak intensity 0.700 cd/lm LEDs/each optic 1 Light colour White Required components:	
 SEOUL SEMICONDUCTOR LED Z8Y22P FWHM 91.0 + 40.0° Efficiency 91 % Peak intensity 0.680 cd/lm LEDs/each optic 1 Light colour White Required components:	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

www.ledil.com/where_to_buy

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

www.ledil.com/where_to_buy