


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
IN	00		AI	ECO-14-002553	21FEB2014	KP	LV

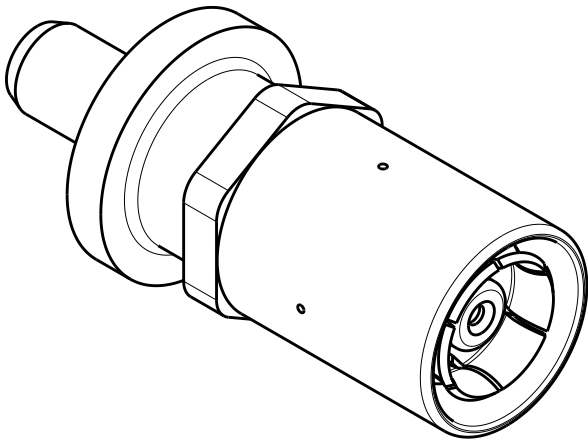



ISOMETRIC VIEW

- 1

SHELL: ZINC.
OUTER CONTACT: COPPER.
RETAINING RING: BRASS.
DIELECTRIC: POLYESTER PBT, NATURAL.
- 2

SHELL: 2.0µm MIN TIN OVER 1.0µm MIN NICKEL, BOTH OVER 5.08µm MIN COPPER.
OUTER CONTACT: 3.75µm MIN TIN OVER 1.27µm MIN NICKEL.
RETAINING RING: 2.03µm MIN TIN OVER 1.27µm MIN NICKEL.
- 3

PLUG SUBASSEMBLY ACCEPTS JACK SUBASSEMBLIES MEETING DIN 72594-1, ROAD VEHICLES - RADIO FREQUENCY INTERFACE - DIMENSIONS AND ELECTRICAL REQUIREMENTS.
4. SEE INSTRUCTION SHEET 408-10028.

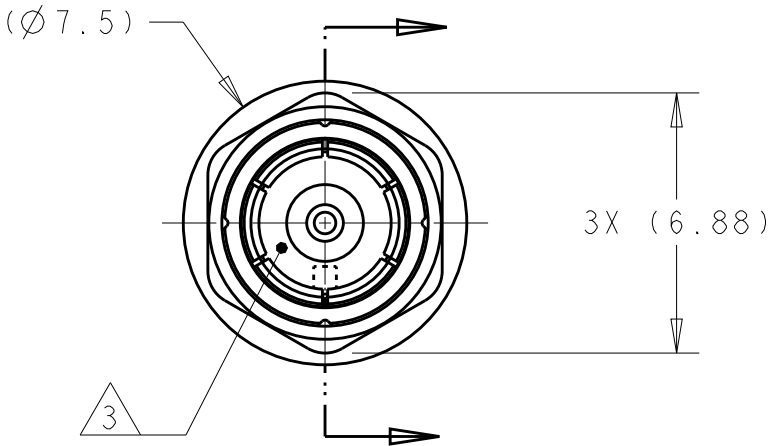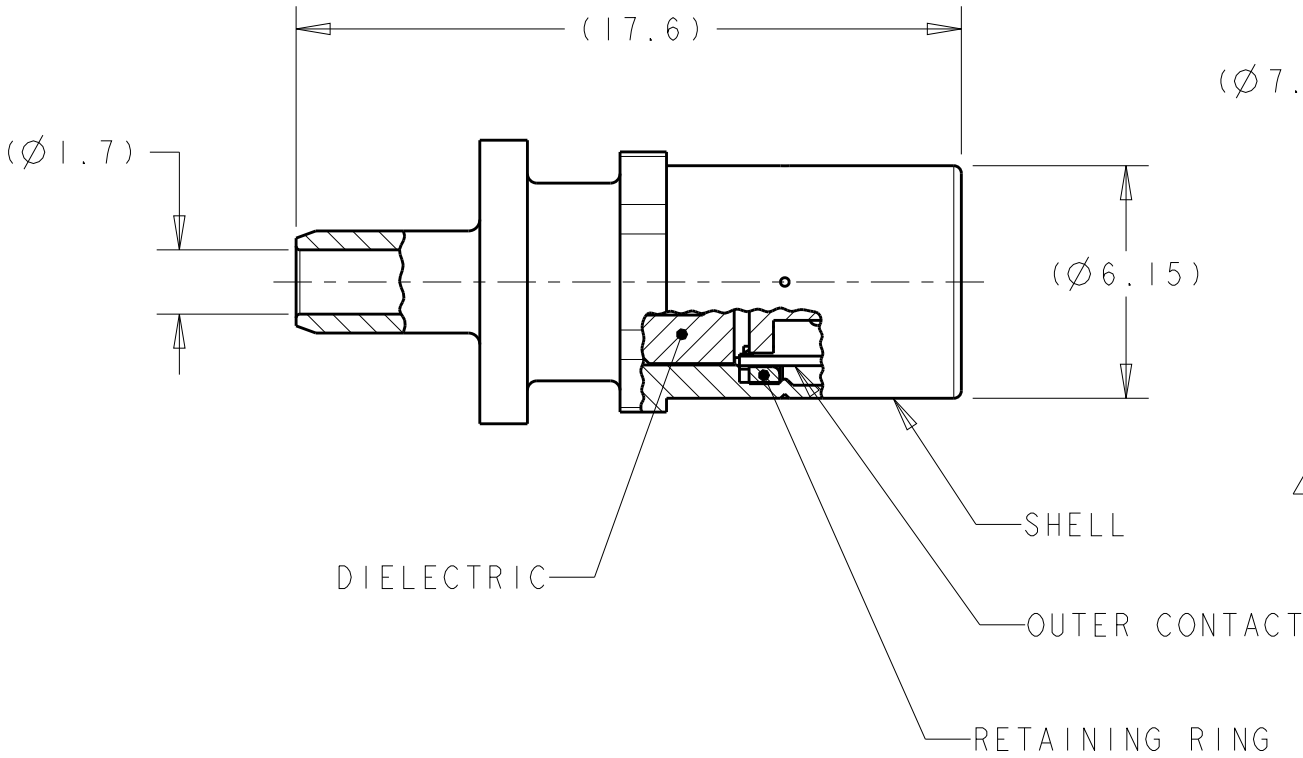

1924937-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. PETERSON 13FEB2012	TE Connectivity PLUG SUBASSEMBLY, RG-316 OR RG-174, SMB	
DIMENSIONS: mm		CHK L. VARSIK 13FEB2012		
		APVD L. VARSIK 13FEB2012		
		PRODUCT SPEC -		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-13157	NAME	
0 PLC ±-		WEIGHT -	SIZE	
1 PLC ±-		CUSTOMER DRAWING	CAGE CODE	
2 PLC ±-			DRAWING NO	
3 PLC ±-		A300779		
4 PLC ±-		C-1924937		
ANGLES ±-		RESTRICTED TO		
FINISH		SCALE		
1		5:1		
2		SHEET		
		OF		
		REV		
		A1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1924937-1](#)