


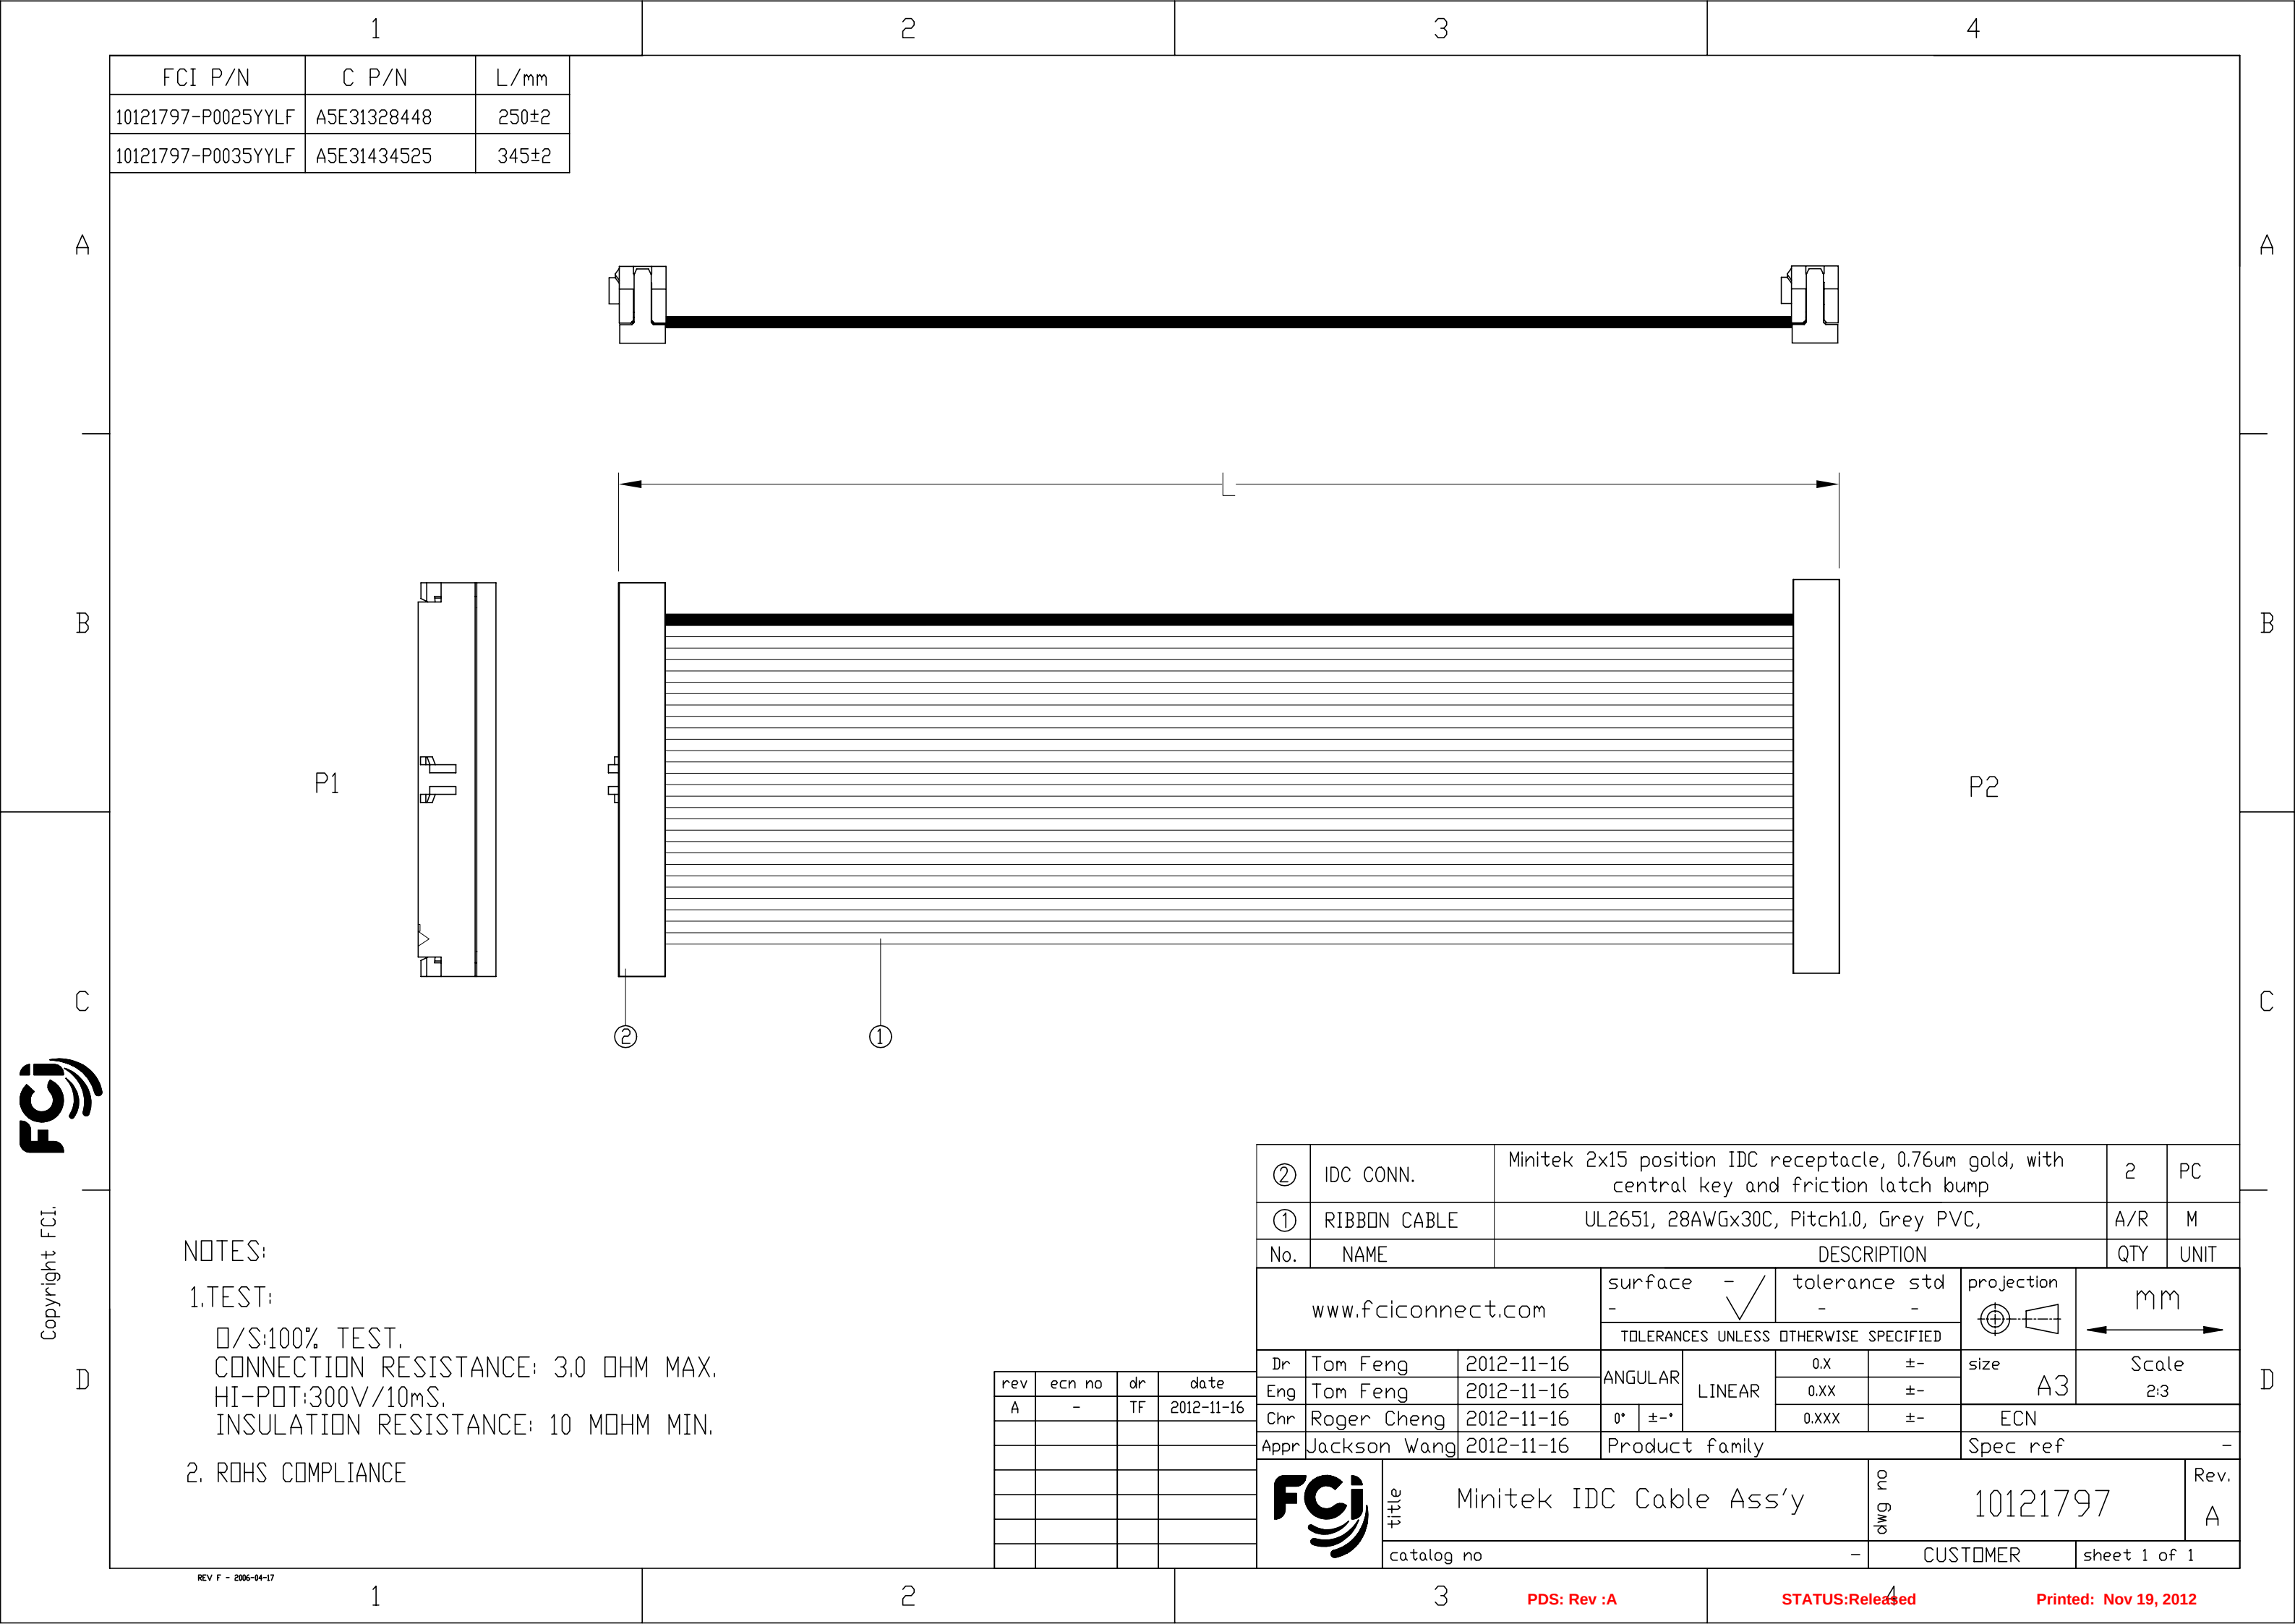

FCI P/N	C P/N	L/mm
10121797-P0025YYLF	A5E31328448	250±2
10121797-P0035YYLF	A5E31434525	345±2

P1

P2

②

①

②	IDC CONN.	Minitex 2x15 position IDC receptacle, 0.76um gold, with central key and friction latch bump					2	PC
①	RIBBON CABLE	UL2651, 28AWGx30C, Pitch1.0, Grey PVC,					A/R	M
No.	NAME	DESCRIPTION					QTY	UNIT
www.fciconnect.com			surface -		tolerance std - -		projection	mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	Tom Feng	2012-11-16	ANGULAR	LINEAR	0.X	±-	size	Scale 2:3
Eng	Tom Feng	2012-11-16			0.XX	±-		
Chr	Roger Cheng	2012-11-16			0° ±-	0.XXX	±-	
Appr	Jackson Wang	2012-11-16	Product family			Spec ref -		
			title Minitex IDC Cable Ass'y			dwg no 10121797		Rev. A
catalog no -			CUSTOMER		sheet 1 of 1			

NOTES:

1.TEST:

□/S:100% TEST.
CONNECTION RESISTANCE: 3.0 OHM MAX.
HI-POT:300V/10mS.
INSULATION RESISTANCE: 10 MOHM MIN.

2. ROHS COMPLIANCE