


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.07.17	阿树

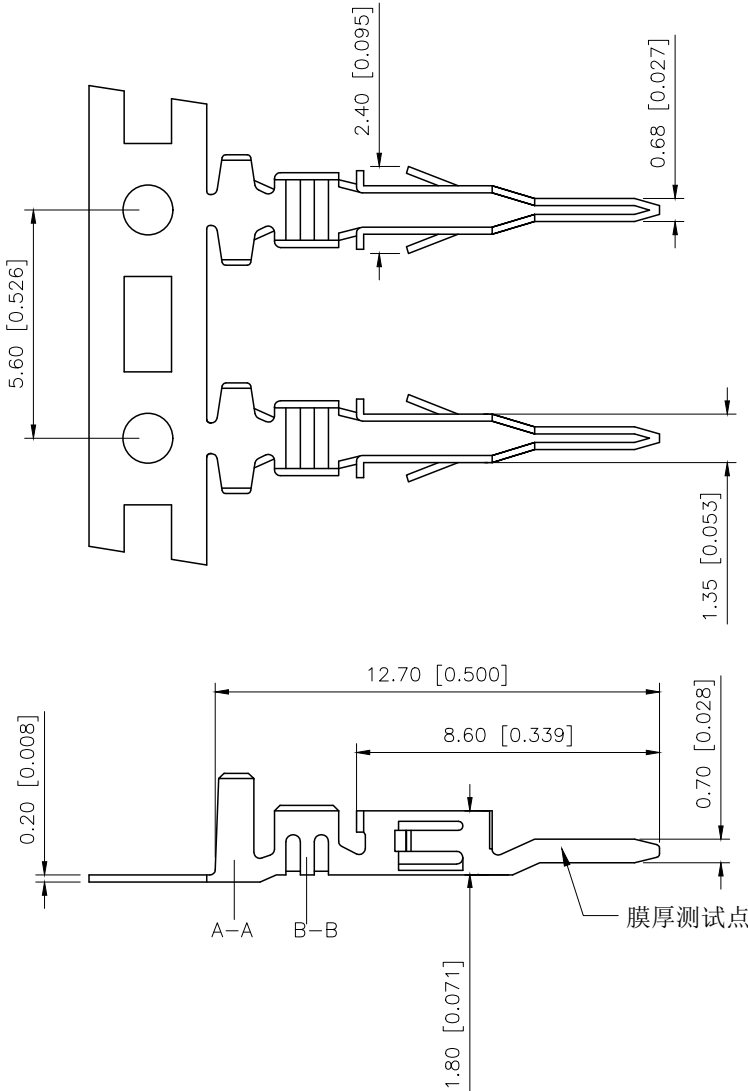

- Specifications
- Voltage rating:250V AC/DC
 - Current rating:5A AC/DC
 - Withstanding voltage:1000V AC/minute
 - Temperature range:-45° to+125°
 - Insulation resistance:≥1000MΩ Min
 - Contact resistance:≤10mΩ Max

PART NO.:
X3025 I M-P SN
① ② ③ ④ ⑤

- ①Series Number.
②Category: T-terminal
③Welding Board Angle: M-Male
④Material: P-Phosphor bronze
⑤Plating Category:SN-Tin Plated

X3025TM-PSN	Phosphor Bronze	AWG#20-24	X3025HF
PART NO	Material	Wire Size	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	3.00mm Crimp Style Connectors
PART NO.:	X3025TM-PSN
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1