

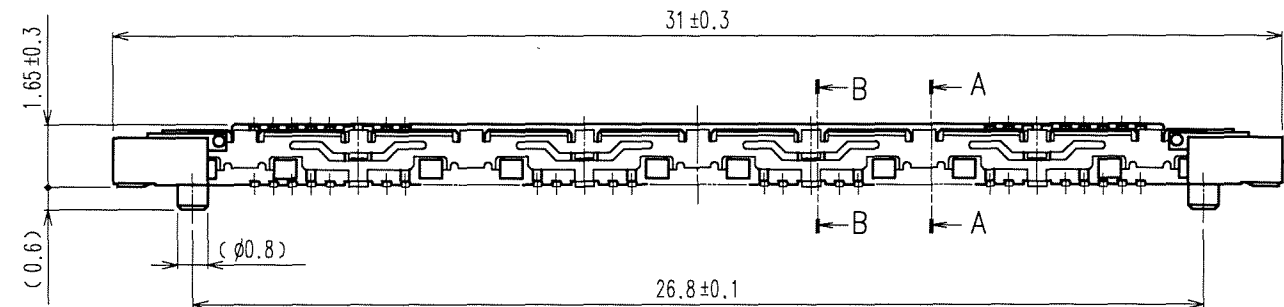


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

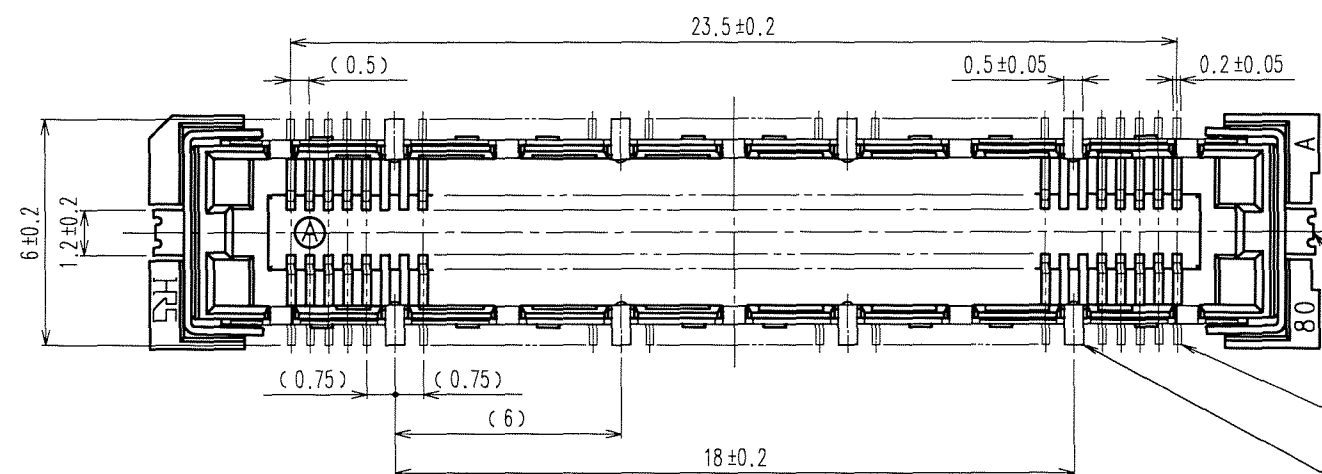


RECOMMENDED LAND PATTERN DIMENSION OF PCB

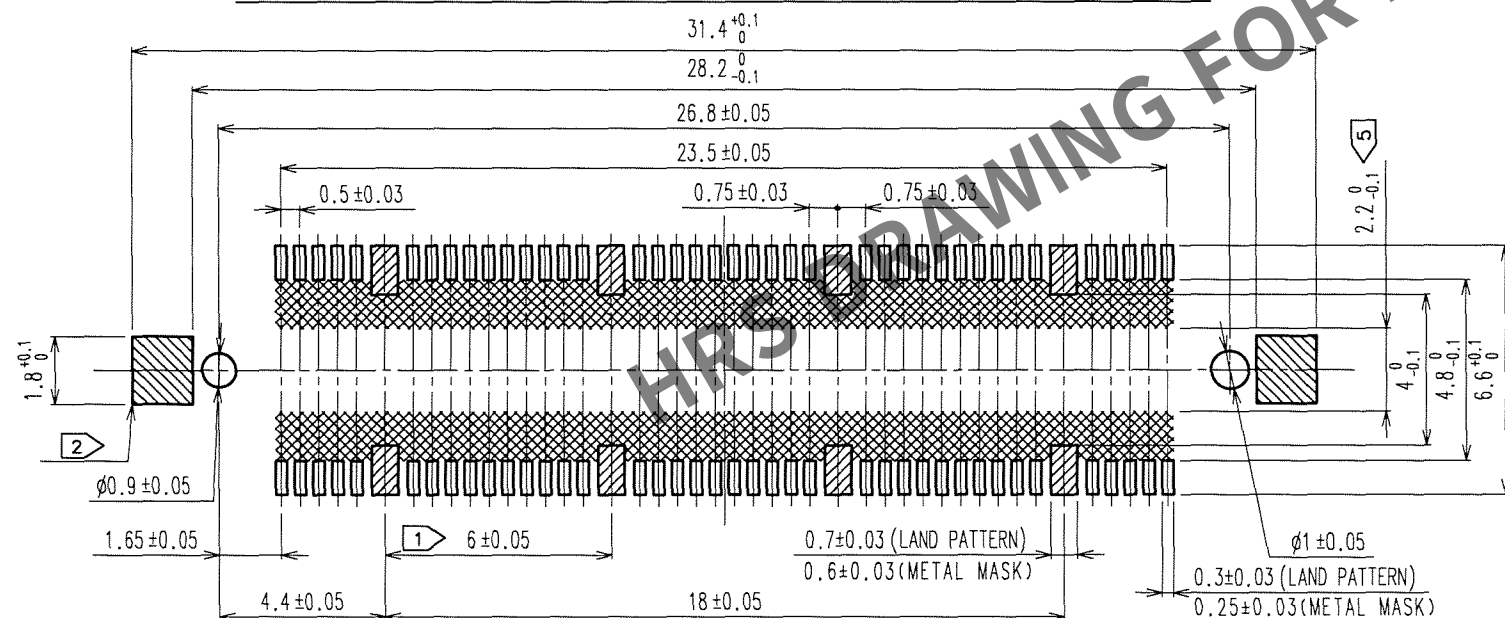


- NOTES ① 8 HATCHED PARTS: GROUND CIRCUIT.
② 2 HATCHED PARTS: GROUND CIRCUIT.
③ SMT LEAD-COPLANARITY: 0.1 MAX.
④ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
⑥ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				.	△				.
△				.	△				.
△				.	△				.

A-A (10:1)

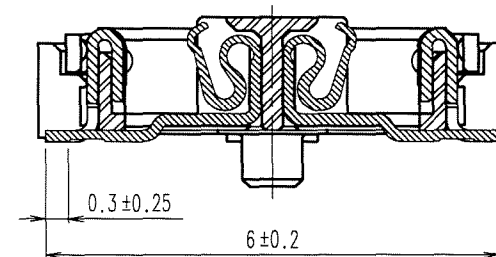

B-B (10:1)

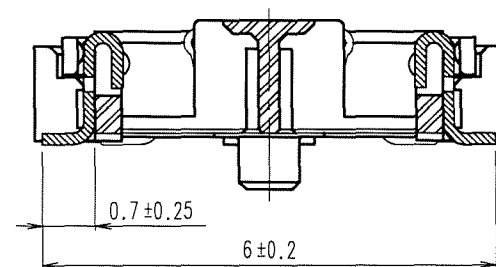

4	PHOSPHOR BRONZE	TIN-PLATING	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min.
3	PHOSPHOR BRONZE	TIN-PLATING			LEAD AREA: GOLD FLASH
1	LCP	BEIGE UL94V-0			UNDER PLATING: NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		K. NAKAMURA	K. NAKAMURA	X. Ogawa	7/ Okawa	
		06.04.25	06.04.25	06.04.25	06.04.26	

SCALE	5 : 1	DRAWING NO.	EDC3-152109-25	PART NO.	FX11LA-80S/8-SV(71)
UNITS	mm	CODE NO.	CL573-0103-4-71		1/1

HRS HIROSE ELECTRIC CO., LTD.