



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Plug Connectors



Connector System: **Wire-to-Wire**  
Number of Positions: **3**  
Connector & Housing Type: **Housing for Female Terminals**  
Centerline (Pitch): **8.66 mm [.34 in]**  
Sealable: **Yes**

[All DEUTSCH DT Plug Connectors \(220\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Triangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing

Configuration Features

Blank Cavity Position	0
Number of Positions	3
Number of Rows	2

Electrical Characteristics

--	--



Operating Voltage	250 VAC
-------------------	---------

Nominal Voltage Architecture	250 V
------------------------------	-------

Body Features

Cable Exit Angle	180°
------------------	------

Primary Product Color	Gray
-----------------------	------

Contact Features

Contact Size	Size 16
--------------	---------

Contact Type	Socket
--------------	--------

Mating Pin Diameter	1.55 mm[.061 in]
---------------------	------------------

Contact Current Rating (Max)	13 A
------------------------------	------

Mechanical Attachment

Terminal Position Assurance	No
-----------------------------	----

Strain Relief	Add By Accessory
---------------	------------------

Mating Alignment Type	Polarized
-----------------------	-----------

Mating Alignment	With
------------------	------

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Housing Material	PA GF
------------------	-------

Centerline (Pitch)	8.66 mm[.34 in]
--------------------	-----------------

Dimensions

Connector Height	23.89 mm[.94 in]
------------------	------------------

Product Width	20.17 mm[.794 in]
---------------	-------------------

Product Length	41.94 mm[1.651 in]
----------------	--------------------

Compatible Insulation Diameter Range	2.23 – 3.68 mm[.088 – .145 in]
--------------------------------------	--------------------------------

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
-----------------------------	----------------

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Degree of Protection	IP68, IP6K9K
----------------------	--------------

Compatible With Agency/Standards Products	SAE J2030
---	-----------



UL Flammability Rating	12mm Flame Test per Standard UL-94
------------------------	------------------------------------

Packaging Features

Packaging Quantity	900
Packaging Method	Box

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>




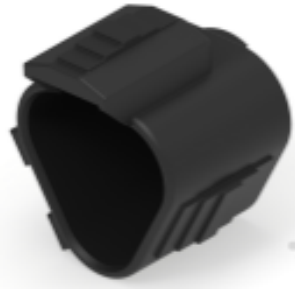








EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) <b>Article Safe Usage Statements:</b> Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


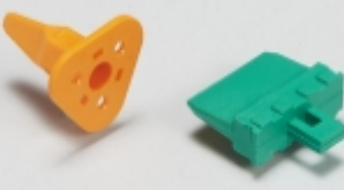


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

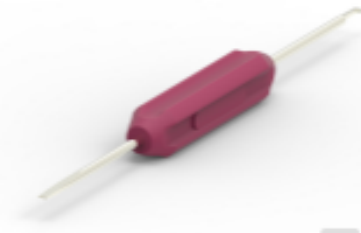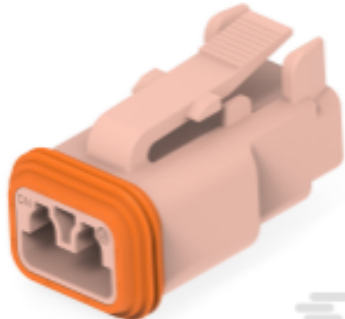

Compatible Parts

 <p>TE Part # CAT-J41-DDRC DEUTSCH DT Receptacle Connectors</p>	 <p>TE Part # CAT-J67-DSCC16 DEUTSCH Size 16 Crimp Contacts</p>	 <p>TE Part # CAT-D48-ST273 DEUTSCH Solid Contacts</p>	 <p>TE Part # 1011-345-0305 DUST CAP, 3P, PLG, BLK, DT</p>
 <p>TE Part # CAT-D487-W416 Wedgelocks: DEUTSCH DT</p>	 <p>TE Part # CAT-D48-SP729 DEUTSCH Sealing Plugs</p>	 <p>TE Part # 776363-1 SEALING PLUG, SZ 16 CAVITY</p>	 <p>TE Part # CAT-D487-H342 DEUTSCH DT Headers</p>
 <p>TE Part # DT-RT1 EXT TOOL, FRONT RELEASE</p>	 <p>TE Part # CAT-J41-DDCC DEUTSCH DT Color Connectors</p>	 <p>TE Part # 1010-062-0306 SEAL, INTF, 3P, RED-ORG, SL RET, DT</p>	 <p>TE Part # 1062-14-0177 SOC, SF, SIZE 16, 14-18, SN/SN</p>

Also in the Series | DEUTSCH DT


 <p>Automotive Connector Caps &amp; Covers (19)</p>	 <p>Automotive Connector Locks &amp; Position Assurance(87)</p>	 <p>Automotive Housings(706)</p>	 <p>Connector Backshells(61)</p>
--	--	---	---




Connector Seals & Cavity Plugs(6)



Connector Strain Relief(28)



Insertion & Extraction Tools(3)



Other Automotive Connector Accessories(28)



PCB Headers & Receptacles(106)

Customers Also Bought



TE Part #9998552005  
DWTC-16/4-X-STK



TE Part #1-2273001-1  
M8 x 1.0 straight socket Pigtail



TE Part #782628-000  
RMW-25/8-1200/ADH-0



TE Part #W3S-1939-P012  
Wedgelocks: DEUTSCH DT



TE Part #1418994-1  
AMP MCP 2.8 HSG.WITH SEC.10POS



TE Part #2-2303813-4  
DT04-3P-TE82, REC, 3P, BLK, E, SNAPXCAP



TE Part #2213772-3  
AV22 SPM 3A MOVE RING LED WHITE 24V



TE Part #2-2303816-4  
DEUTSCH DT Plug Connectors

Documents

Product Drawings

DT06-3S-TN81, PLG, 3P, GRY, N, SNAPXCAP

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-2303816-2\_A.2d\_dxf.zip



English

Customer View Model

[ENG\\_CVM\\_CVM\\_2-2303816-2\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2-2303816-2\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English