

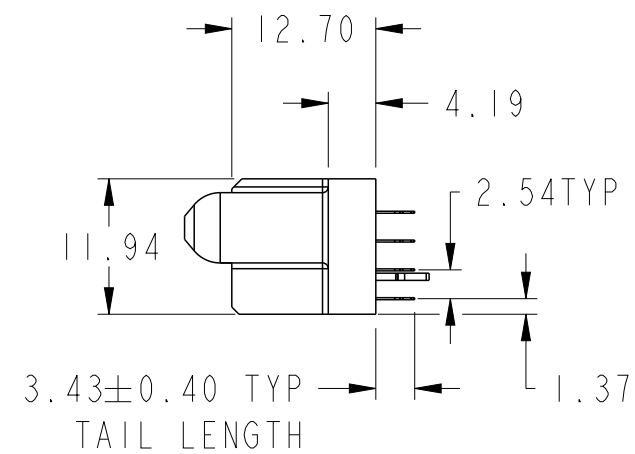
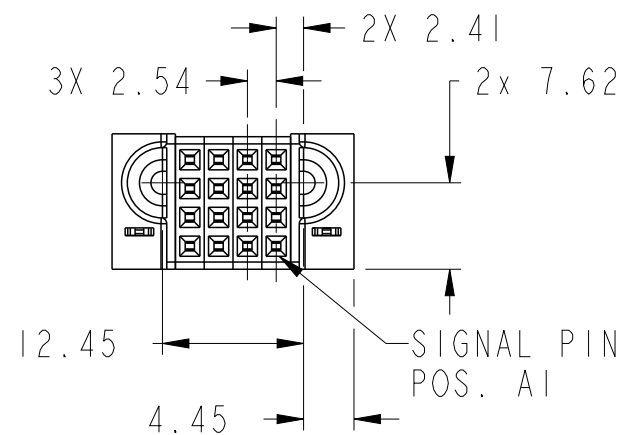
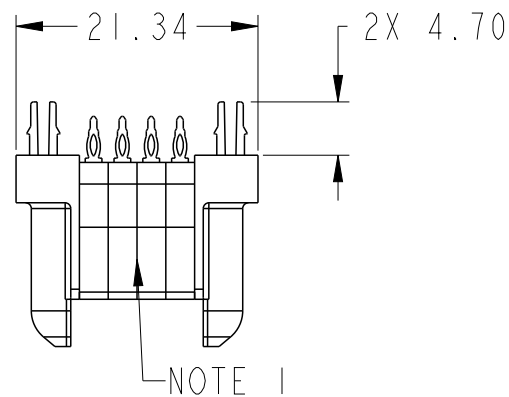
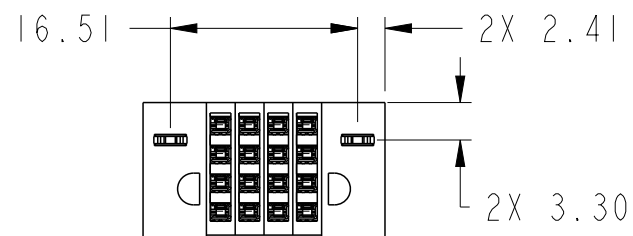




PRODUCT NUMBER SEE SHEET 2




spec ref				dr		Peng-Bing Fu	2013/01/29	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size		A3	scale		3:2							
tolerance std				eng		Peng-Bing Fu	2013/05/08			ecn no		-										
ASME Y14.5				TOLERANCES UNLESS OTHERWISE SPECIFIED						chr		-		rel level			Released					
				appr		Pei-Ming Zheng	2013/05/08			product family				PowerBlade+								
surface		<div></div>	linear		0.X		±0.50		<div></div>	title				I6S		dwg no		10106269-0004001		rev		A
					0.XX		±0.25			VT PF RECEPTACLE												
					0.XXX		±0.10															
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.				Product - Customer Drw				sheet 1 of 3				



PRODUCT NO.	ROWS	SIGNAL					
		E1	4	3	2	1	E2
10106269-0004001LF	DCBA		F	F	F	F	
			F	F	F	F	
			F	F	F	F	
			F	F	F	F	

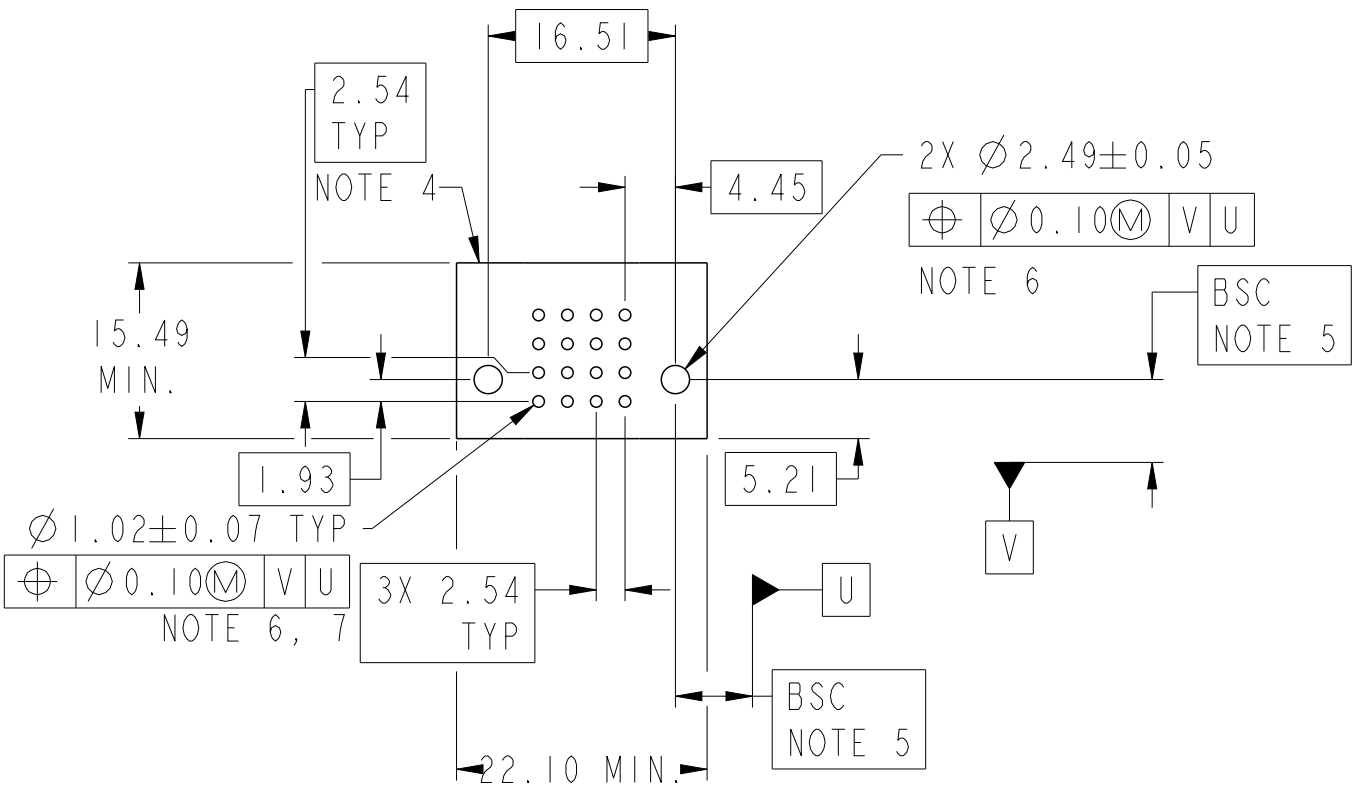


CODE	DESCRIPTION
F	STD SIGNAL CONTACT
HA	METAL HOLD DOWN



dr	Peng-Bing Fu	2013/01/29	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2		
eng	Peng-Bing Fu	2013/05/08			ecn no	-				
chr	-	-			rel level	Released				
appr	Pei-Ming Zheng	2013/05/08	product family		PowerBlade+					
	title		16S		dwg no		10106269-0004001		rev	
www.fci.com		cat. no.		Product - Customer Drw				sheet 2 of 3		

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - SIGNAL CONTACT - COPPER ALLOY.
 - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Peng-Bing Fu	2013/01/29	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	1:1		
eng	Peng-Bing Fu	2013/05/08			ecn no	-				
chr	-	-								
appr	Pei-Ming Zheng	2013/05/08	product family	PowerBlade+	rel level	Released				
<div></div> <div>www.fci.com</div>		title		16S VT PF RECEPTACLE		dwg no		10106269-0004001	rev	A
cat. no.			Product - Customer Drw				sheet 3 of 3			



Copyright FCI.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10106269-0004001LF](#)