

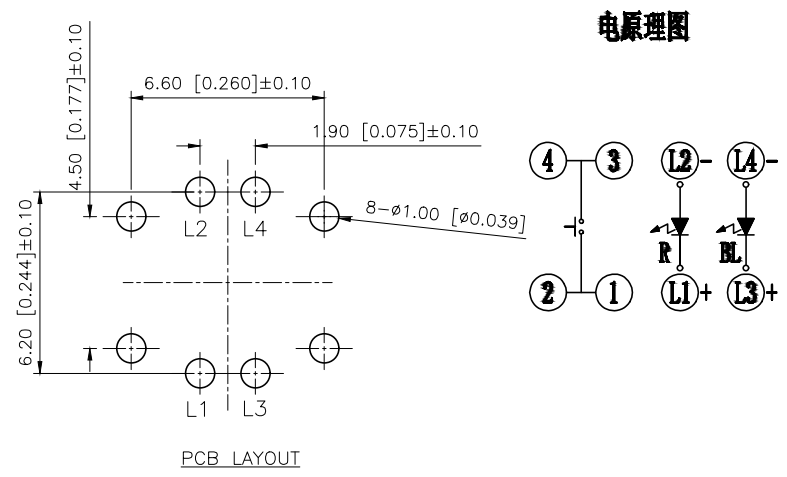


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.24	阿树

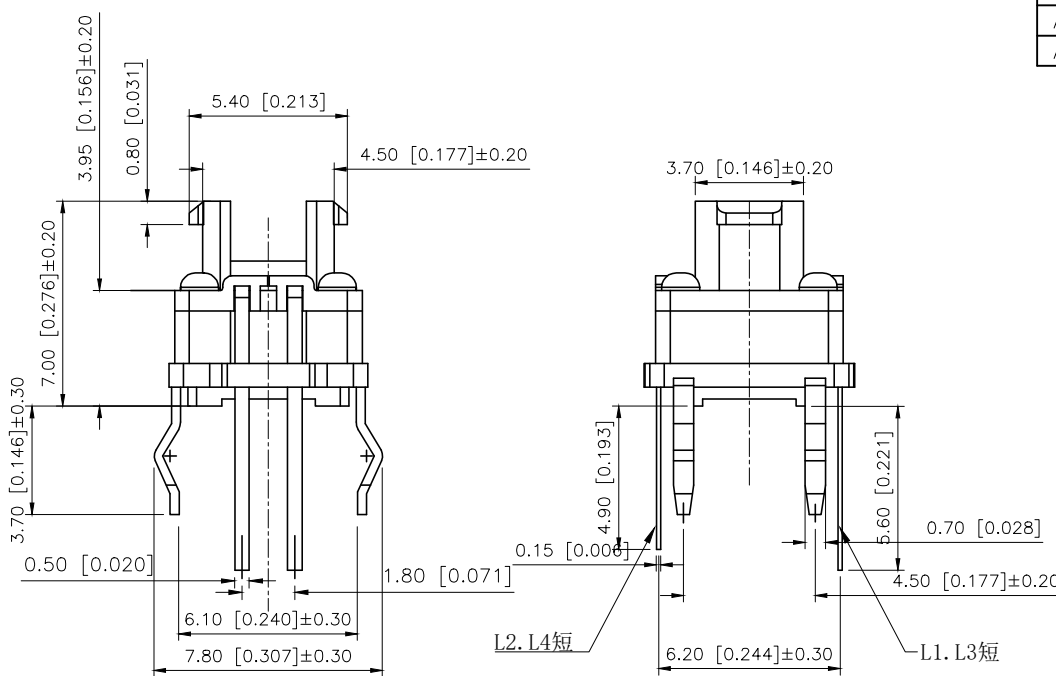

- Specifications (规格):
- 1.Climate Grade(气候等级): -25℃~+75℃
 - 2.Voltage rating(额定电压):30V DC,30mA
 - 3.Withstanding voltage(耐压值):≥250V AC/minute
 - 4.Insulation resistance(绝缘电阻):≥100MΩ Min
 - 5.Contact resistance(接触电阻):≤30mΩ Max
 - 6.Life (使用寿命): 100,000 cycles Min
 - 7.Operating force (动作力): 260gf±50gf
 - 8.Salt minst.Test(盐雾测试):12±1hours

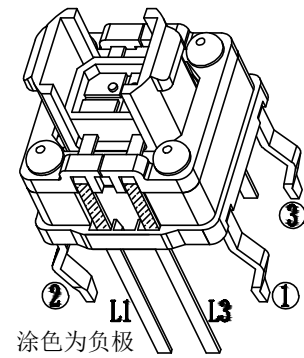

6	Double LED light	1		Transparent	A0708双色光
5	Double light cover	1	PA66	Black	A0708
4	Double light button	1	PA66	Ceramic white	A0708
3	Shrapnel	1	F.ag	Ag Plated	借0601(Ø5)
2	Base	1	PA66	Black	A0708
1	Key shares	1	H62	Ag Plated	借A0801
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING/COLOR	Note

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: LED SWITCH
CHECKED		UNIT: mm/in	PART NO.: TM-010-M1-RBL
APPROVED		SIZE: A4	DWG NO.: