

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
60V	$1.7\Omega@10V$	300mA
	$1.8\Omega@4.5V$	



合肥矽普半导体

Siliup Semiconductor Technology Co., Ltd

技术 品质 服务

www.siliup.com


Feature

- High power and current handing capability
- Surface mount package
- ESD protected 2KV

Application


- Battery Switch
- DC/DC Converter

Package

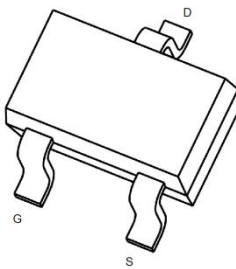


SOT-323

Circuit diagram



Marking



72K

:Device Code

Order Information

Device	Package	Unit/Tape
2N7002KW	SOT-323	3000


Absolute maximum ratings (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	300	mA
Pulse Drain Current Tested	I_{DM}	1200	mA
Power Dissipation	P_D	300	mW
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	416	°C/W
Storage Temperature Range	T_{STG}	-55 to 150	°C
Operating Junction Temperature Range	T_J	-55 to 150	°C


Electrical characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	VGS=0V , ID=250μA	60	-	-	V
Drain-Source Leakage Current	I _{DSS}	VDS=48V , VGS=0V	-	-	1	uA
Gate-Source Leakage Current	I _{GSS}	VGS=±20V , VDS=0V	-	-	±10	uA
Gate Threshold Voltage	VGS(th)	VDS=VGS , ID=250μA	1	1.5	2.5	V
Static Drain-Source On-Resistance	R _{DS(ON)}	VGS =10V, ID =200mA	-	1.7	3	Ω
		VGS =4.5V, ID =200mA	-	1.8	4	
Dynamic characteristics						
Input Capacitance	C _{iss}	VDS=25V , VGS=0V , f=1MHz	-	28	-	pF
Output Capacitance	C _{oss}		-	10	-	
Reverse Transfer Capacitance	C _{rss}		-	5	-	
Total Gate Charge	Q _g	VDS=10V , VGS=4.5V , ID=300mA	-	1.7	-	nC
Gate-Source Charge	Q _{gs}		-	0.35	-	
Gate-Drain Charge	Q _{gd}		-	0.5	-	
Switching Characteristics						
Turn-On Delay Time	t _{d(on)}	VDD=30V VGS=10V , RG=25Ω , ID=300mA	-	3	-	nS
Turn-On Rise Time	t _r		-	17	-	
Turn-Off Delay Time	t _{d(off)}		-	10	-	
Turn-Off Fall Time	t _f		-	21	-	
Source-Drain Diode characteristics						
Diode Forward Voltage	V _{SD}	VGS=0V , IS=1A , TJ=25℃	-	-	1.2	V


Typical Characteristics

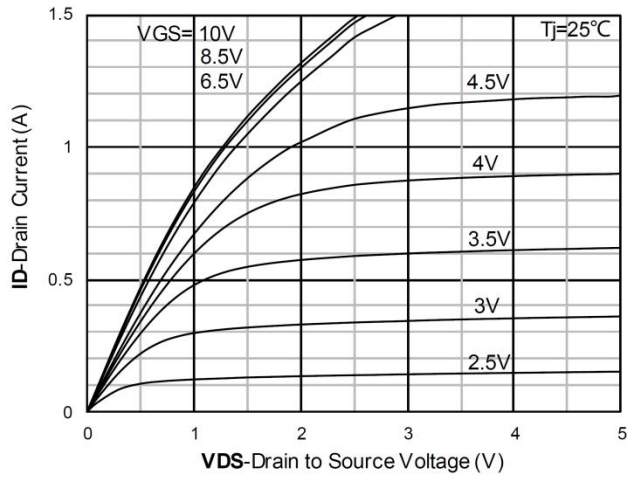


Output Characteristics

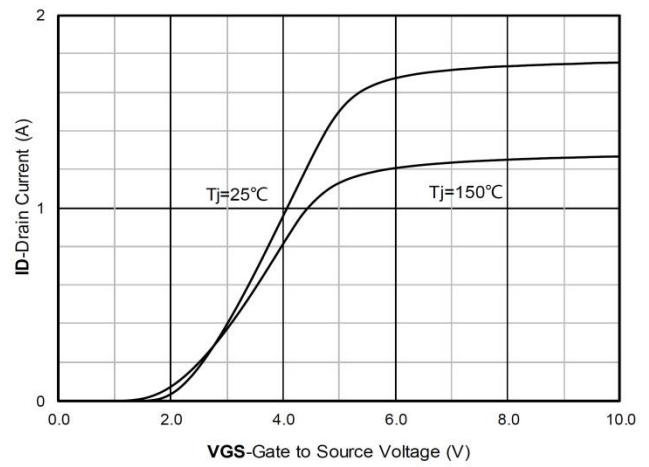


Transfer Characteristics

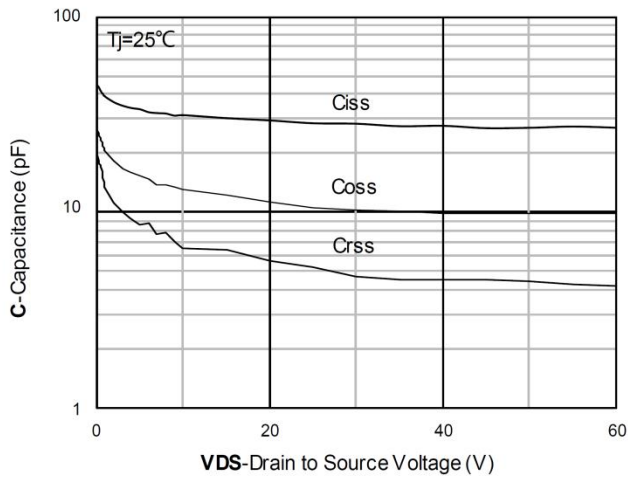


Capacitance Characteristics

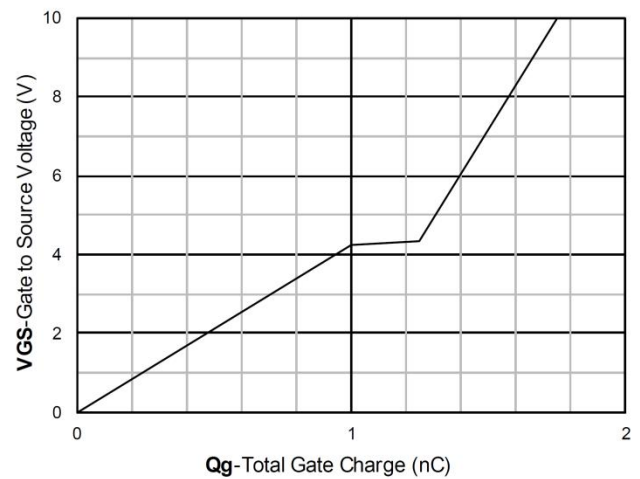


Gate Charge

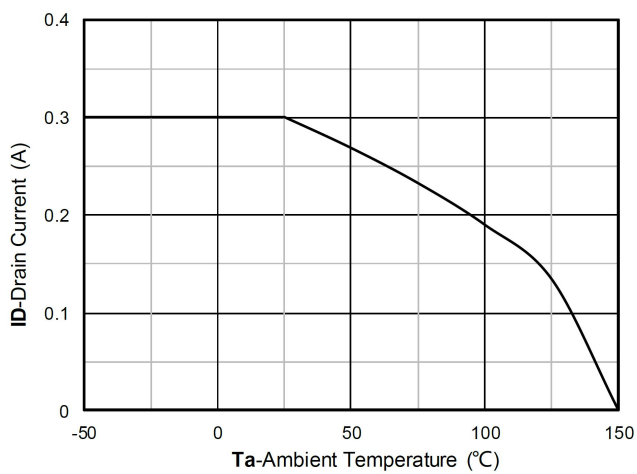


Current dissipation

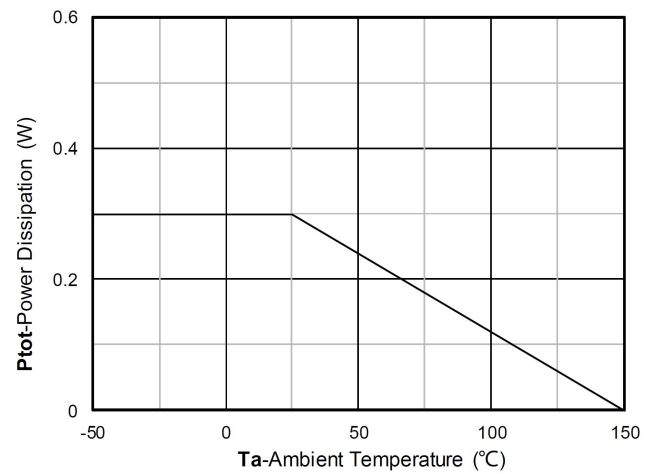


Power dissipation

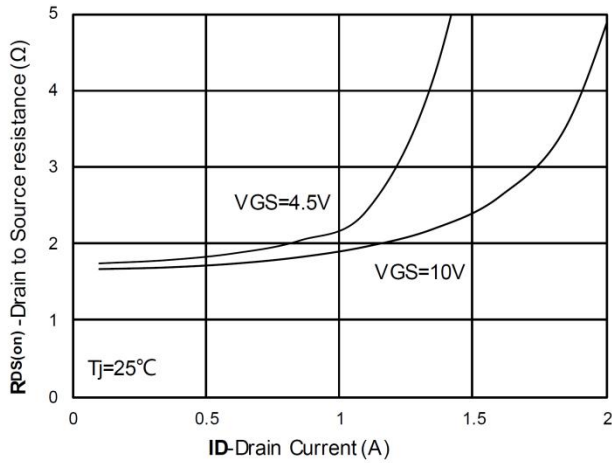


$R_{DS(on)}$ VS Drain Current

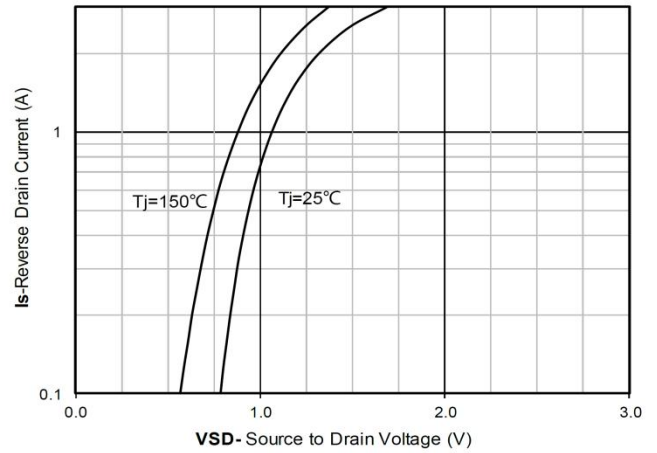


Forward characteristics of reverse diode

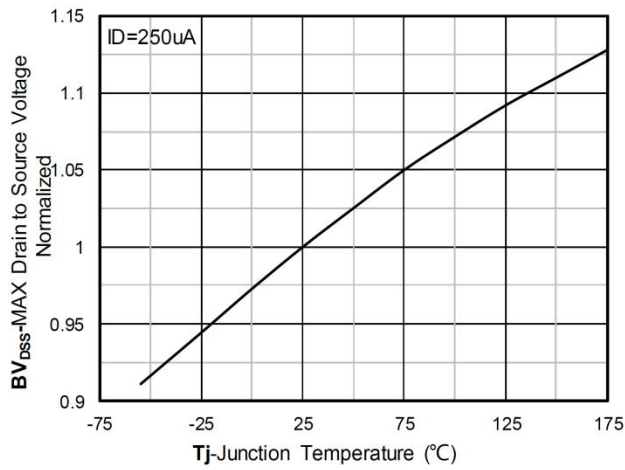


Normalized breakdown voltage

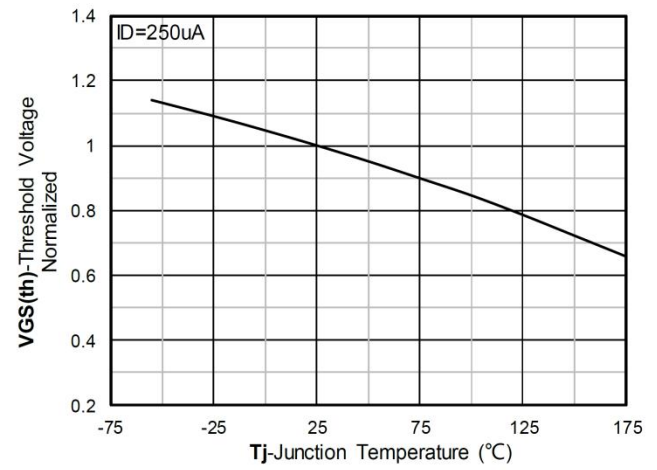

Normalized Threshold voltage

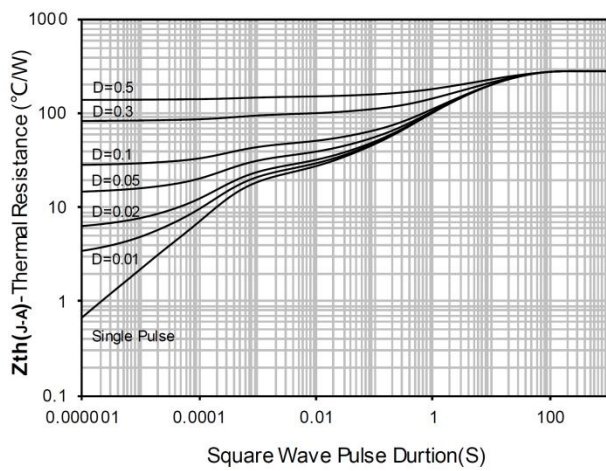


Maximum Transient Thermal Impedance

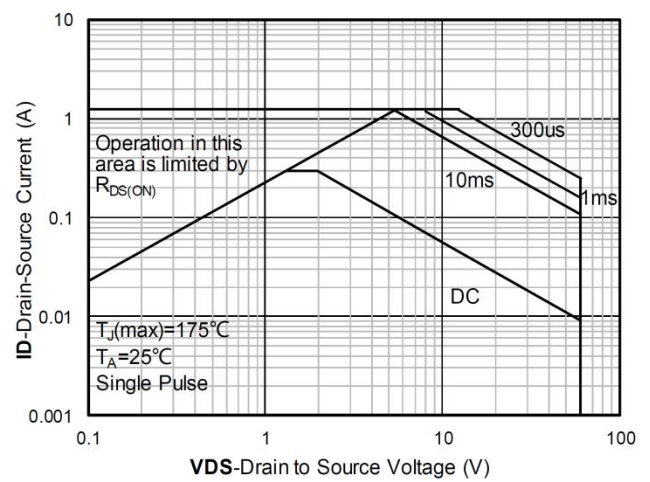

Safe Operation Area

SOT-323 Package Information

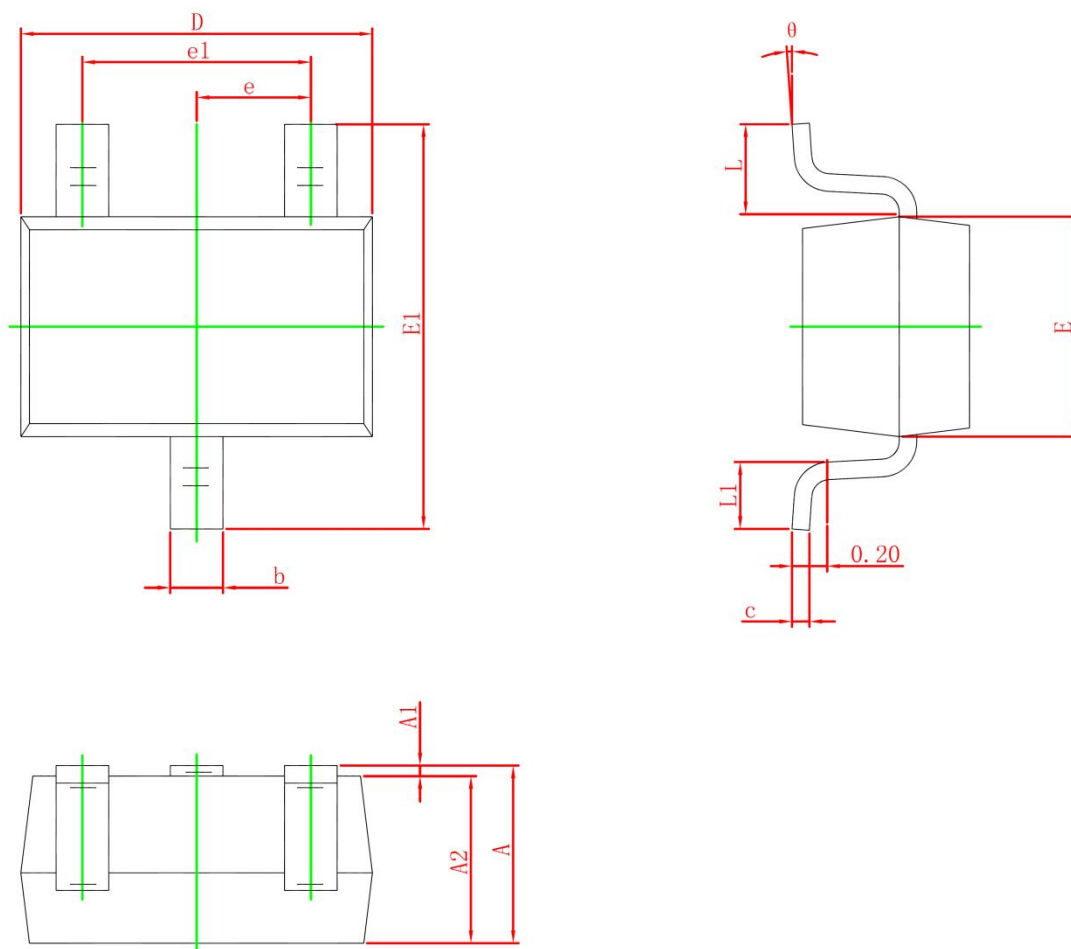

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.000	2.450	0.085	0.096
e	0.650 TYP.		0.026 TYP.	
e1	1.200	1.400	0.047	0.055
L	0.525 REF.		0.021 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°