
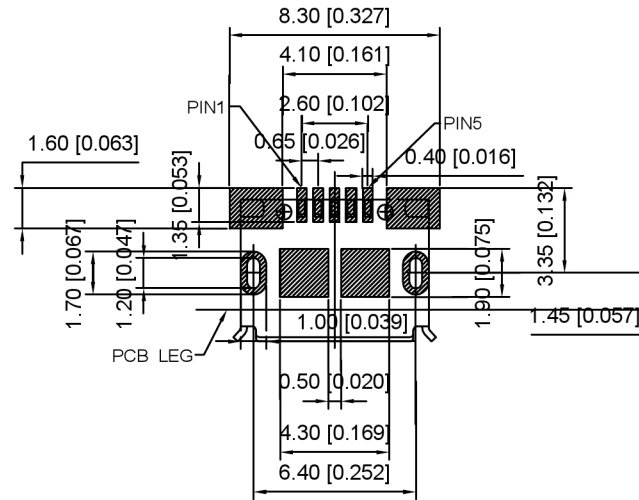
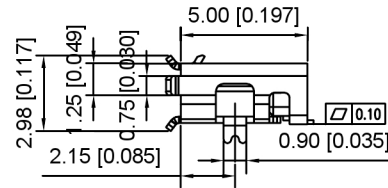
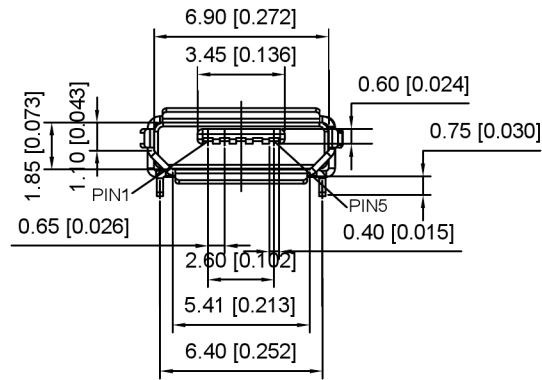
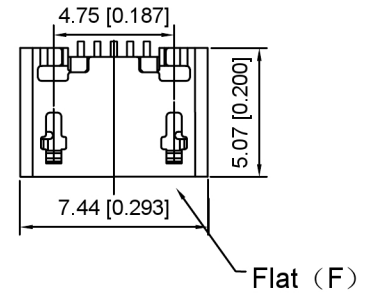



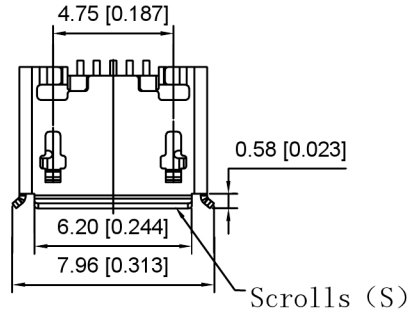

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLERANCE: ± 0.05)

Material

Housing Material: LCP, UL94V-0, black

Contact Terminal: Copper Alloy

Metallic Shell: Sus

Electrical

Voltage Rating: 30 V AC

Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A

Contact Resistance: 30mΩ Max

Insulation resistance: 1000MΩ Min

Dielectric withstanding voltage: 250V AC/Minute

Mechanical

Durability: 10,000 cycles

Mating Force: 35N (3.57Kgf) Max

Unmating Force: 8N (0.82Kgf) Min.

U254-05XX-4BH82-XXS
1:AU 1U"
6:AU 30U"
T:TIN
N:NICKEL
1:With 2:Without
S:Scrolls F:Flat

广东星坤科技股份有限公司

Δ%
Δ%
Δ%
MARK

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR				$\pm 5^\circ$
$L \leq 4$				± 0.2
$4 < L \leq 16$				± 0.3
$16 < L \leq 63$				± 0.4
$L > 63$				± 0.5

XKB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	MICRO USB
CHKD	UNIT: mm/in	PART NO.:
APPD	SIZE: A4	DWG NO.:
		U254-05XX-4BH82-XXS
		WEIGHT
		SHEET
		REVISION
		1/1
		A0