

#### SUBMINIATURE SOLID STATE LAMP

Mega Green

Part Number: KM2520MGC01


#### **Features**

- Subminiature package.
- Long life solid state reliability.
- Low package profile.
- Moisture sensitivity level : level 3.
- RoHS compliant.

#### Description

The Mega Green source color devices are made with Al-GaInP on GaAs substrate Light Emitting Diode.

## **Package Dimensions**

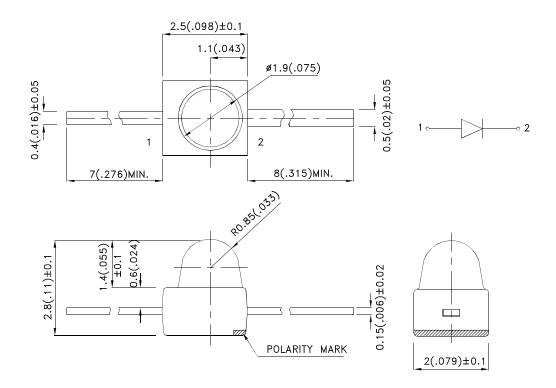

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
- 3. Lead spacing is measured where the leads emerge from the package.

  4. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

SPEC NO: DSAD0330 **REV NO: V.7 DATE: OCT/11/2010** PAGE: 1 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** ERP: 1202000538 DRAWN: Y.F.Lv







## Kingbright

### **Selection Guide**

Part No.	Dice	lv (mcd) [2] Dice Lens Type @ 20mA		,	Viewing Angle [1]
			Min.	Тур.	201/2
KM2520MGC01	Mega Green (AlGaInP)	Water Clear	500	800	20°

- 1. 01/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
  2. Luminous intensity/ luminous Flux: +/-15%.

### Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Mega Green	574		nm	IF=20mA
λD [1]	Dominant Wavelength	Mega Green	570		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Mega Green	26		nm	IF=20mA
С	Capacitance	Mega Green	20		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Mega Green	2.1	2.5	V	IF=20mA
lR	Reverse Current	Mega Green		10	uA	VR = 5V

- 1.Wavelength: +/-1nm.
- 2. Forward Voltage: +/-0.1V.


## Absolute Maximum Ratings at TA=25°C

Parameter	Mega Green	Units	
Power dissipation	75	mW	
DC Forward Current	30	mA	
Peak Forward Current [1]	150	mA	
Reverse Voltage	5	V	
Operating/Storage Temperature	-40°C To +85°C		
Lead Solder Temperature [2]	260°C For 3 Seconds		
Lead Solder Temperature [3]	260°C For 5 Seconds		

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
   5mm below package base.


SPEC NO: DSAD0330 **REV NO: V.7** DATE: OCT/11/2010 PAGE: 2 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.F.Lv ERP: 1202000538


## Kingbright

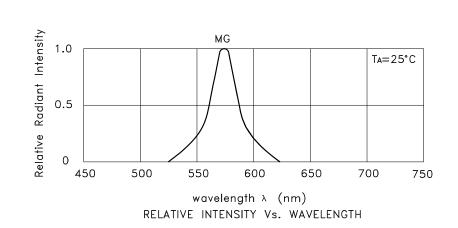



Mega Green


#### KM2520MGC01












SPEC NO: DSAD0330 APPROVED: WYNEC REV NO: V.7 CHECKED: Allen Liu DATE: OCT/11/2010 DRAWN: Y.F.Lv PAGE: 3 OF 4 ERP: 1202000538

# Kingbright

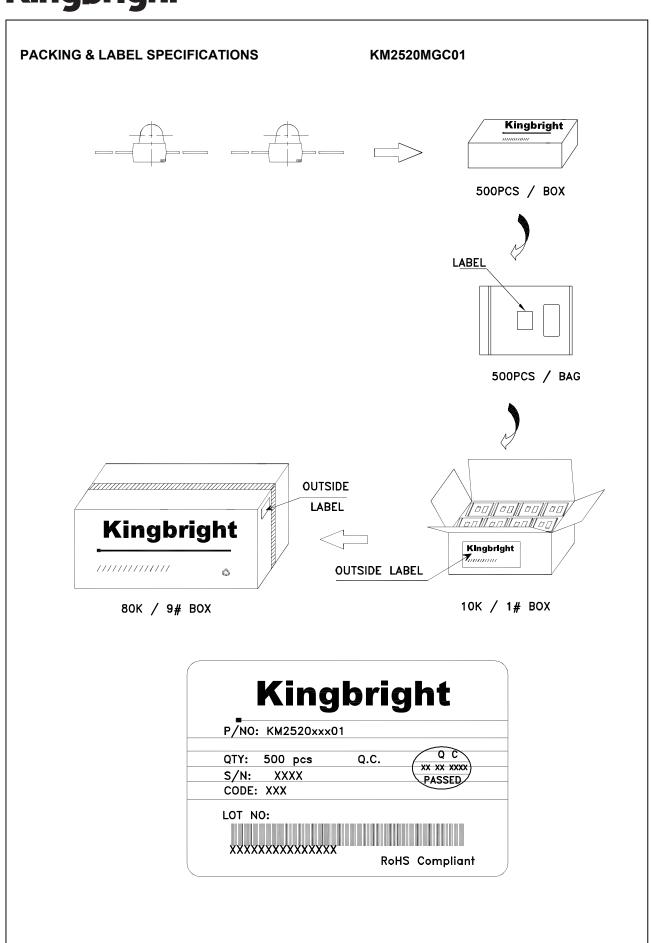

SPEC NO: DSAD0330 REV APPROVED: WYNEC CHE

REV NO: V.7 CHECKED: Allen Liu DATE: OCT/11/2010 DRAWN: Y.F.Lv PAGE: 4 OF 4 ERP: 1202000538