


Remark:

1.MATERIAL:

1.1 Housing:thermoplastic plastics.

1.2 terminals:Copper Alloy

1.3 Shell:Copper Alloy/SPCC.

2.characteristics:

2.1 Rating Voltage : 30V AC.

2.2 Rating Current:PIN1&PIN4(Vbus&Correponding ground PIN)

1.8A MAX Other PINS 0.25A min.

2.3 Contact Resistance:PIN1&PIN4:30 mΩ MAX. Other PINS: 50 mΩ

2.4 Insulation Resistance:100 MΩ MIN.


2.5 Withstanding Voltage:AC 100V between adjacent contacts

2.6 Mating force: 3.57Kgf MAX(35N MAX)




2.7 Extraction force:1.02Kgf Min(10N Min)

2.8 Life test:1500Cycles MIN.

2.9 Temperature Range: -55℃~+85℃.


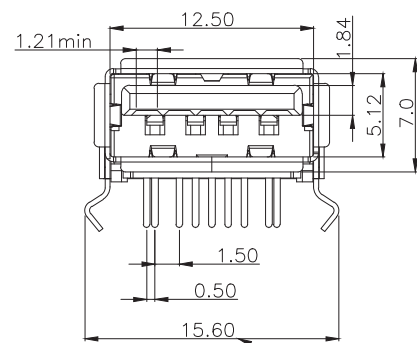


此尺寸以通配为主

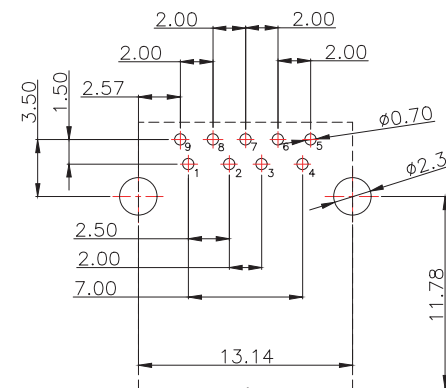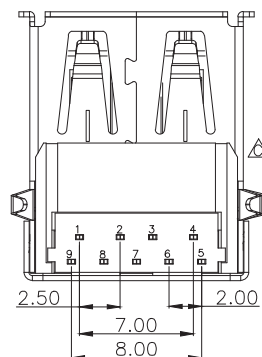CONNECTOR
FRONT EDGE

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	StdA_SSRX-
2	D-	6	StdA_SSRX+
3	D+	7	GND_DRAIN
4	GND	8	StdA_SSTX-
Shell	Shield	9	StdA_SSTX+


MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: USB 3.0 AF 90度 卷边		
			PAR	USB-301WD-ARY	
DECIMALS:			DWN		
ANGLES:			CHKD		
.X:±0.30 .X':±3°			APVD		
.XX:±0.20 .XX':±2°		SCALE 1:1	UNIT:MM		
.XXX:±0.10		CUSTOMER COPY	SIZE:A4	SHEET:1F1	REV:A





每盒100PCS.



共25层
50盒

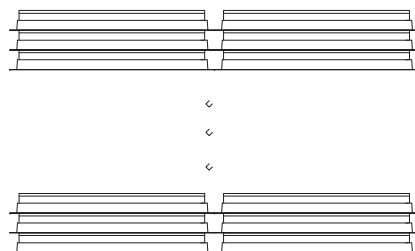

25盒分两层放入纸箱中,上层10盒/捆,下层15盒/捆
每箱内放两排50盒,共5000PCS产品.

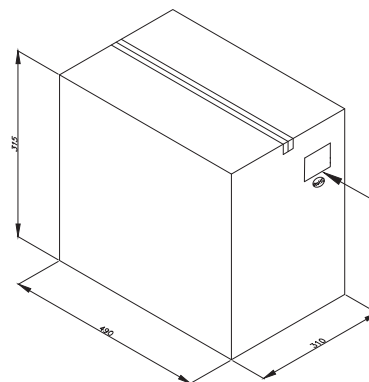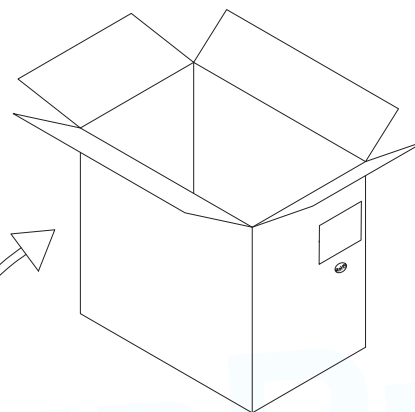

外箱标签粘贴处

备注:

1. 将全检后的良品如图示摆入PVC透明吸塑盒中,每盒包装100PCS,摆好后,盖好上盖,贴上QC标签
2. 将装好产品的吸塑盒每箱放两排,每排放两捆。放入规格为490*310*315mm的纸箱中,每箱装5000PCS.
3. 用透明胶工字型封箱,用美纹胶纸贴于我司产品标签,出货前需更换为业务提供的客户标签.QC PASS章盖于我司产品标签上.RoHS标签贴于客户标签对应位置.

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: USB 3.0 AF 90度 卷边 包装图	
			PAR	USB-301WD-ARY
DECIMALS:	ANGLES:		DWN	
.X:±0.30	.X':±3°		CHKD	
.XX:±0.20	.XX':±2°		APVD	
.XXX:±0.10			SCALE1:1	UNIT:MM
			SIZE:A4	SHEET:1F1
			CUSTOMER COPY	REV:A