




Connectors > PCB Connectors > PCB Headers & Receptacles > Miniature Automotive I/O Headers

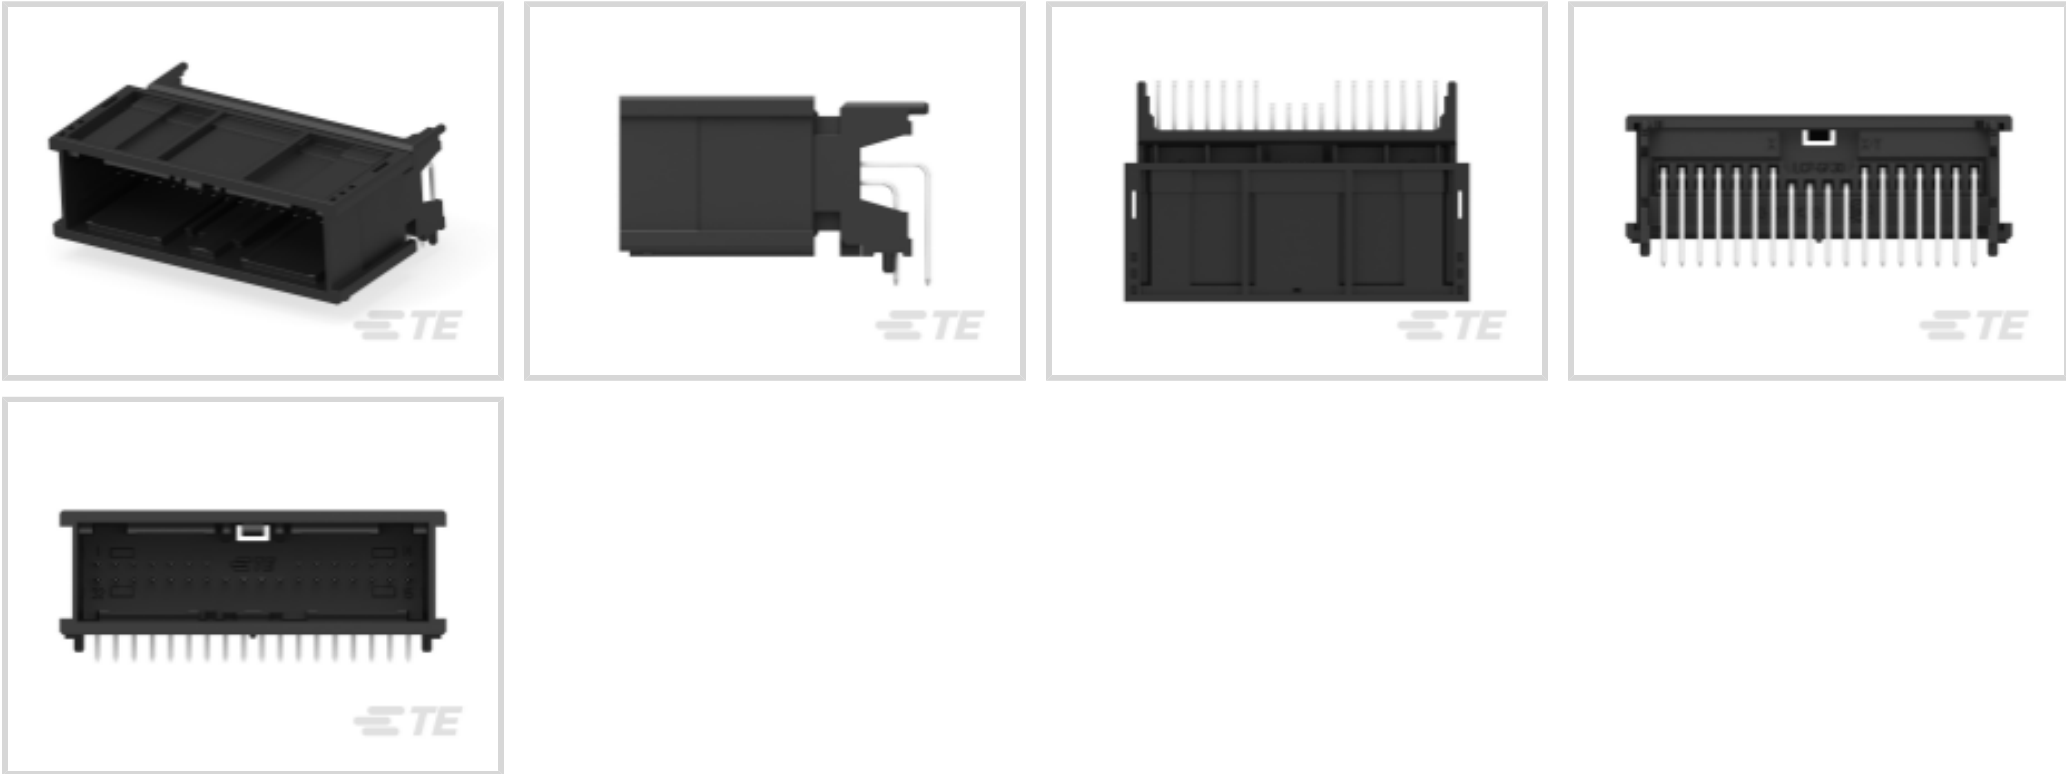

Connector System: Wire-to-Board

Number of Positions: 32

Centerline (Pitch): 1.8 mm [.071 in]

Sealable: No

PCB Mount Orientation: Horizontal

[All Miniature Automotive I/O Headers \(38\)](#)

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Sections	1
Number of Signal Positions	32
Number of Positions	32
PCB Mount Orientation	Horizontal
Number of Rows	2



Electrical Characteristics

Nominal Voltage Architecture	12 V
Operating Voltage	12 VDC

Body Features

Primary Product Color	Black
Connector & Keying Code	A

Contact Features

Contact Size	.5mm
Contact Type	Tab
Mating Tab Width	.5 mm[.02 in]
Mating Tab Thickness	.4 mm[.016 in]
Contact Mating Area Plating Material	Tin

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Mounting Holes	Without
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Locking Interface

Housing Features

Centerline (Pitch)	1.8 mm[.071 in]
--------------------	-----------------

Dimensions

Connector Length	38.05 mm[1.498 in]
Connector Width	24.47 mm[.963 in]
PCB Thickness (Recommended)	.8 mm[.031 in]
Profile Height from PCB	12.6 mm[.496 in]

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[149 °F][158 °F][167 °F][176 °F]
-----------------------------	--



	[185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]

Operation/Application

Solder Process	Reflow Solder
Shielded	No
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	46
Packaging Method	Tray

Other

Interface Number	114-20160
------------------	-----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-M8793-CH8172
MQS, CONNECTOR HOUSING

TE Part # 2303088-2
32POS,NANOMQS,REC HSG,UNSLD,
COD A,FFC

Also in the Series | Nano MQS

Automotive Housings(55)

Automotive Terminals(7)

Insertion & Extraction Tools(6)

PCB Headers & Receptacles(20)

Customers Also Bought

TE Part #2141576-1
32POS NANO MQS TL PLUG
HOUSING, CODE A

TE Part #2176070-1
3521 10R 1% 2W

TE Part #3-2176339-1
CRGCQ 0603 3K3 1%

TE Part #2-2176340-5
CRGCQ 0603 10K 5%

TE Part #1-2176340-7
CRGCQ 0603 470R 5%

TE Part #1-2176326-3
CRGP 0603 100R 1%

TE Part #2176326-5
CRGP 0603 22R 1%

TE Part #1-2176328-3
CRGP 1206 100R 1%



Documents

Product Drawings

32POS,TAB 0.5X0.4,HEADER ASSY,CODA

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2177419-3_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2177419-3_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2177419-3_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Application Specification

English