



SPECIFICATIONS

1. CASE:
18 GA. (.048) CRS, TIN PLATED
2. RATED CURRENT:
50A
3. RATED VOLTAGE:
250VAC, 50/60Hz
120VAC, 400Hz
4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
0.8mA MAX. @ 250VAC, 50Hz

REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	PROTOTYPE	12-21-12	LE

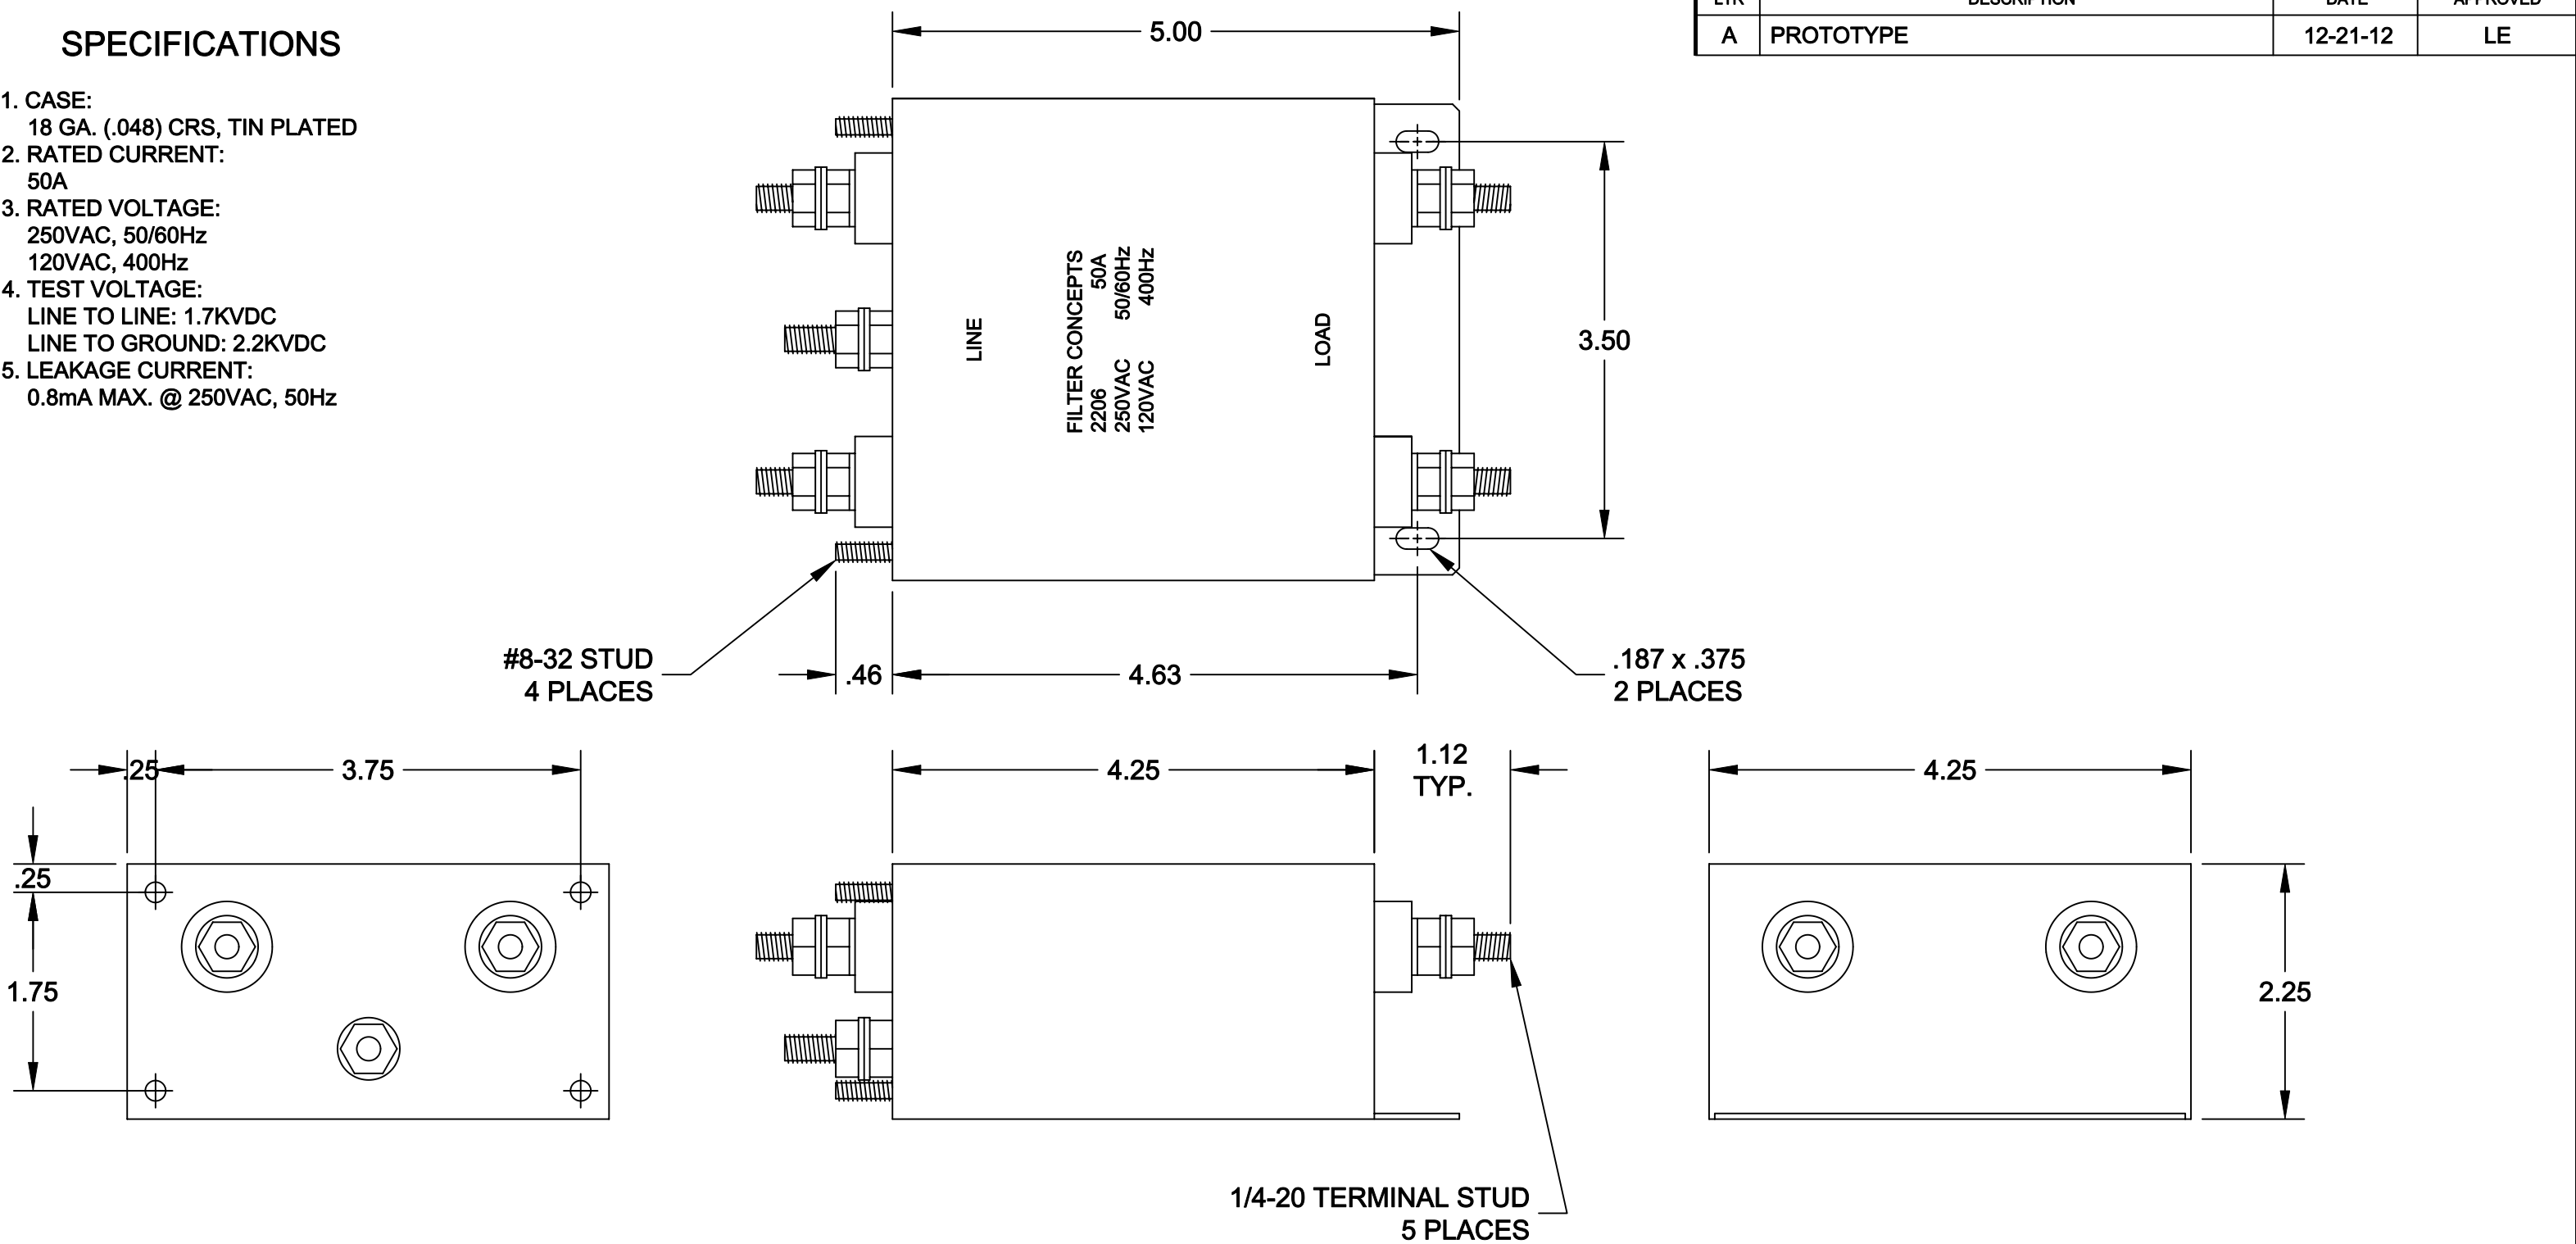

SCHEMATIC

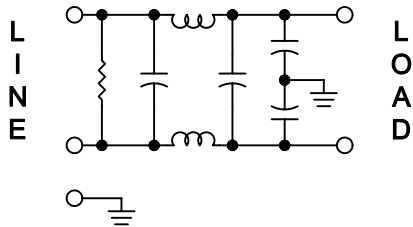

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010		
MATERIAL		
FINISH		

CONTRACT NO.	
APPROVALS	DATE
DRAWN DV	12-21-12
CHECKED	

FILTER CONCEPTS INC.			
APPLICATION DRAWING 2206 FILTER			
SIZE B	CODE IDENT NO.	DRAWING NO. 7146-1	
SCALE 3/5		SHEET 1	OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Astrodyne TDI:](#)

[2206](#)