


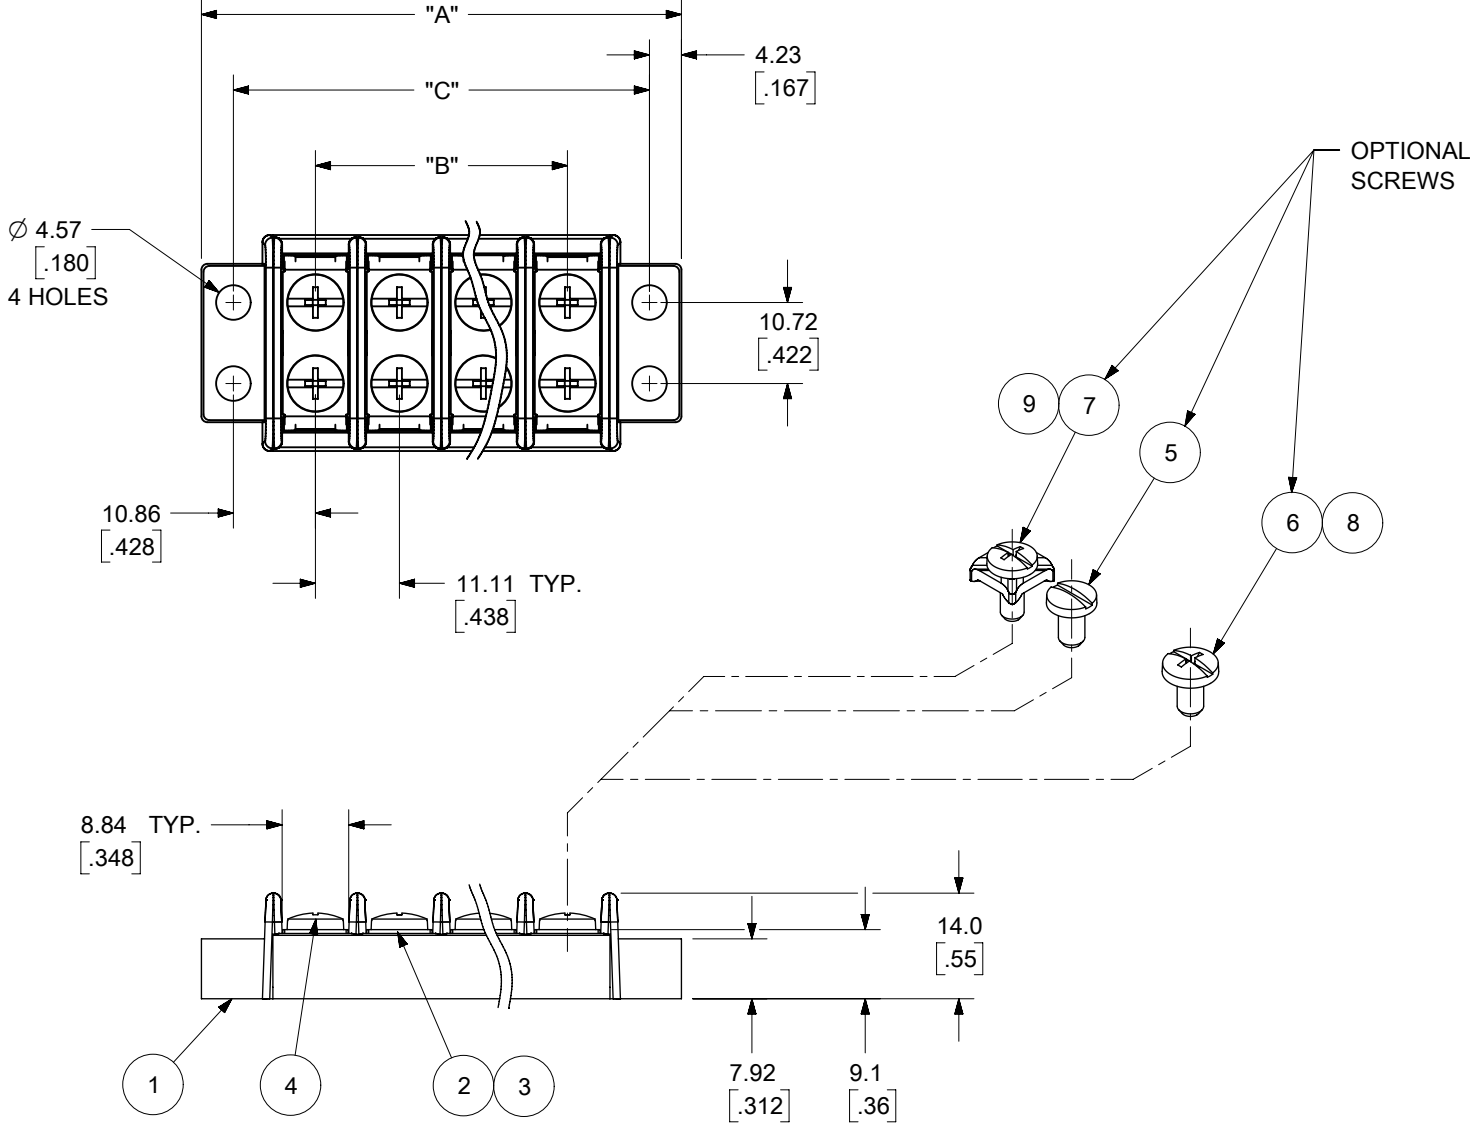

- NOTES:
- 1. MATERIAL: SEE TABLE
 - 2. FINISHES : SEE TABLE
 - 3. "XX" REFERS TO THE NUMBER OF CIRCUITS.
 - 4. ALL COMPONENTS ARE ROHS COMPLIANT.

9	2(XX)	SCREW W/WASHER, #6-32, PHIL-SLOT (OPT -49 -50)	BRASS	NICKEL PLATED
8	2(XX)	SCREW, #6-32, PHIL-SLOT (OPT -56)	STAINLESS STEEL	STAINLESS STEEL
7	2(XX)	SCREW W/WASHER, #6-32, PHIL-SLOT (OPT -50)	STEEL	ZN, CLEAR CHROMATE
6	2(XX)	SCREW, #6-32, PHIL-SLOT (OPT -49)	BRASS	NICKEL PLATED
5	2(XX)	SCREW, #6-32, SLOTTED (OPT -45)	STEEL	ZN, CLEAR CHROMATE
4	2(XX)	SCREW, #6-32, PHIL-SLOT (STD)	STEEL	ZN, CLEAR CHROMATE
3	XX	TERMINAL (USE W/OPT -49 SCREW)	BRASS	TIN PLATED
2	XX	TERMINAL, PLATE	BRASS	NICKEL PLATED
1	1	INSULATOR, DOUBLE ROW	THERMOPLASTIC	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

DOCUMENT STATUS	P1	RELEASE DATE	2024/08/20	07:34:12
-----------------	----	--------------	------------	----------

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	.24-1.18	±.016
>30-120	±0.50	1.18-4.76	±.020
>120	±0.80	>4.76	±.031

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

MM/INCH

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	± SEE CHART
2 PLACES	± SEE CHART	± SEE CHART
1 PLACE	± SEE CHART	±
0 PLACES	±	±
ANGULAR TOL	± °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

B-SIZE

38780

CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515181

EC NO: 794166

DRWN: VISHAH2

CHK'D: GGA

APPR: GGA

2024/06/06

2024/08/20

2024/08/20

INITIAL REVISION:

DRWN: CYORK

APPR: RDEROSS

2006/01/23

2006/01/23

11.11MM [0.438] DR BTS, CB ASY

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

SD-38780-001

DOC TYPE

PSD

DOC PART

001

REVISION

F4

MATERIAL NUMBER

SEE CHART

CUSTOMER

GENERAL MARKET

SHEET NUMBER

1 OF 2

<