

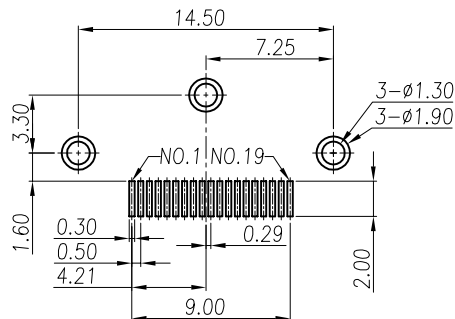
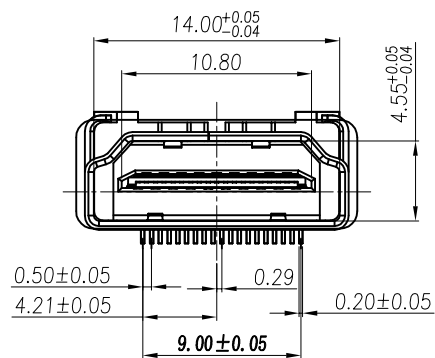




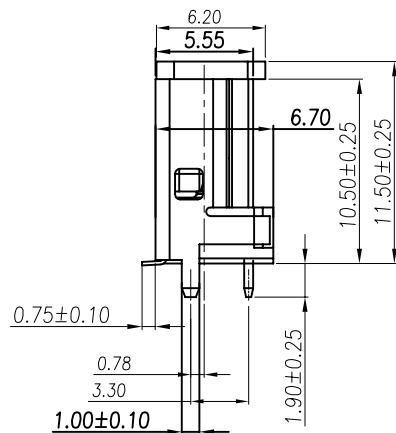

RECOMMENDED P.C.B. LAYOUT(T=1.6mm)
TOLERANCES UNLESS OTHERWISE SPEC.±0.05

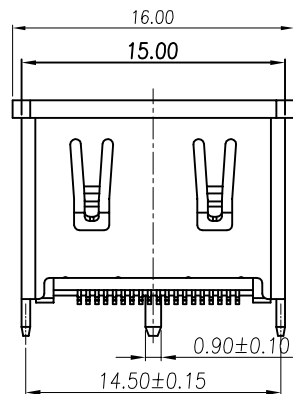

NOTES:

1.) MATERIAL:

- 1-1. HOUSING AND COVER:LCP,UL 94V-0,COLOR:BLACK; HF
- 1-2. CONTACT:BRASS T=0.20;
- 1-3. SHELL:BRASS T=0.50;
- 1-4. CAP: LCP BLACK UL 94-V0

2.) FINISH:

- 2-1. CONTACT: Au PLATING ON CONTACT AREA,(SEE P/N DESCRIBING) AU G/F PLATING ON SOLDER TAILS,50u" MIN. Ni UNDERPLATING OVERALL;
- 2-2. SHELL: PLATING Ni 50u" MIN.

3.) SPECIFICATIONS:

- 3-1. VOLTAGE RATING: 40V
- 3-2. CURRENT RATING: 0.5A
- 3-3. INSULATION RESISTANCE: 100MEG.OHM MIN
- 3-4. CONTACT RESISTANCE: 30 MILL.OHM MAX
- 3-5. OPERATION TEMPERATURE: -20° TO +85°
- 3-6. INSERT FORCE: 44.1N MAX
- 3-7. EXTRACT FORCE: 9.8N MIN
- 3-8. DURABILITY: 10000 CYCLES



深圳市万骏达电子有限公司
<http://www.wanjunda.com>

品名 (ITEM NO)

HDMI立贴10.5

料号 (PART NO)

HDMI-AF-LT-10.5

模号 (MODEL NO)

图号 (DWG NO)

版本 (REV)

日期 (DATE)


设计 (DESIGN)

审核 (CHECKED)

核准 (APPROVED)

单位 (UNIT): MM

比例 (SCALE) 1:1



未注公差

TOLERANCE UNSPECIFIED
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
X" ±5°
X.X" ±2°