






RoHS

MAPX

MODIFICATION

DRW

DATE

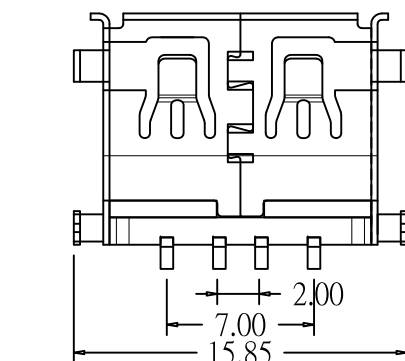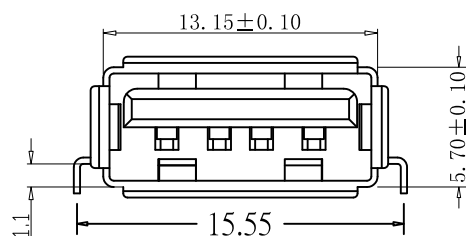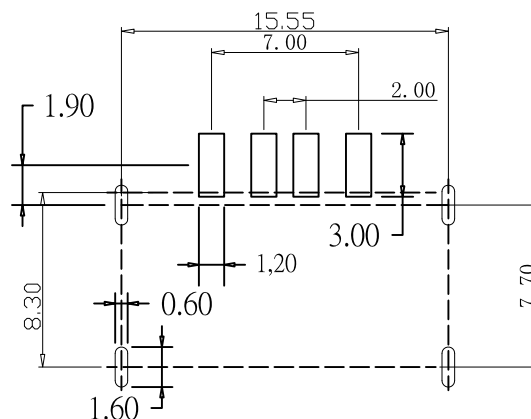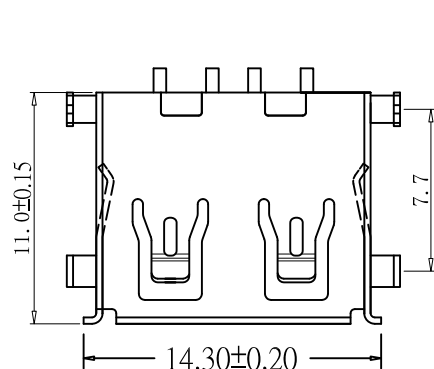

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Thermoplastics,
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U"(MIN)等,镀金区域镀100—200U"镀金1U"

- 外壳: Shell:
电镀四周镀80U"(MIN)等

Nickel Plating

产品图

PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

UNIT	MM	DRAWING	UNIT	MM	DRAWING
X.	±0.25	X.	±5°		
X	±0.20	X	±2°		
XX	±0.15	XX	±1°		
XXX	±0.10	XXX	±0.5°		

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.单位
UNITS

MM

制图
SCALE

尹先华

制图料号
PRODUCT PART NO.

905-751A2022S10201

审核
CHKD

郭治富

产品名称
PRODUCT NO.

AF11.0沉板1.1四脚插板脚距7.7有边铁壳LCP黑色贴板

日期
DATE

2021-04-12

核准
APPD

黄国荣

角法
VIEW版本
VER

A0