

FO-50360-L

2

3

4

5

CW-B9095

H

G

F



E

D

C

B

A

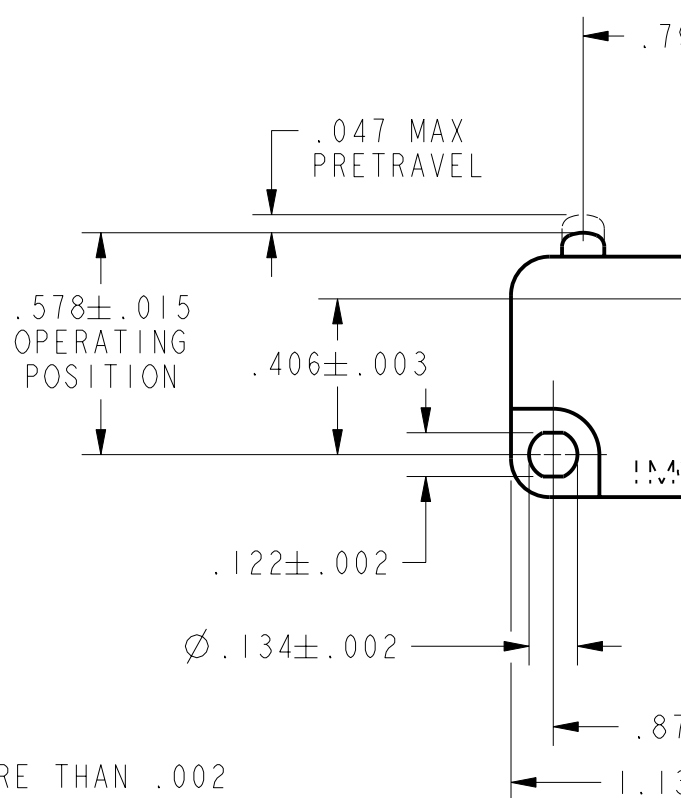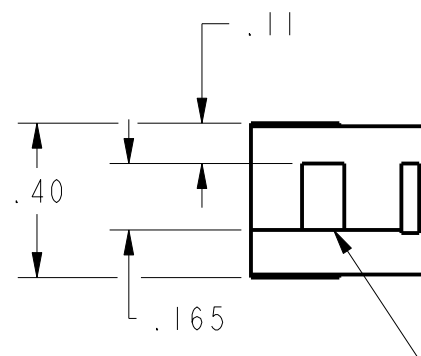

NOTE

1 - PLUNGER MUST NOT PROTRUDE MORE THAN .002 ABOVE CASE WHEN AT FULL OVERTRAVEL


CHARACTERISTICS

OPERATING FORCE----160 GRAMS MAX
RELEASE FORCE-----20 GRAMS MIN
DIFFERENTIAL TRAVEL-----:002-.010
OVERTRAVEL-----:050 MIN
FREE POSITION -----.625 MAX
RELEASE TRAVEL-----:010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

21A 1HP 125, 250, 277 VAC
2HP 250, 277 VAC



UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: ☒

NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
ANGLES ±
RAW MATERIAL-COMMERCIAL

THIRD ANGLE PRO

