
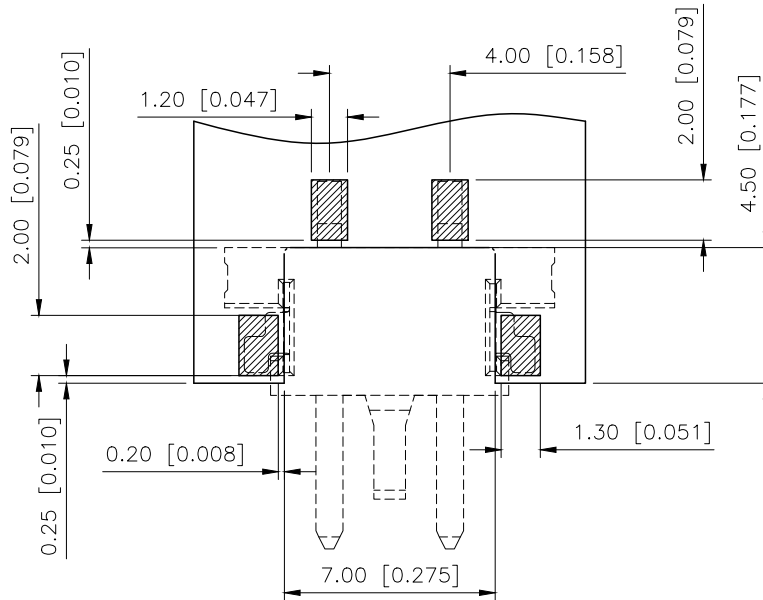
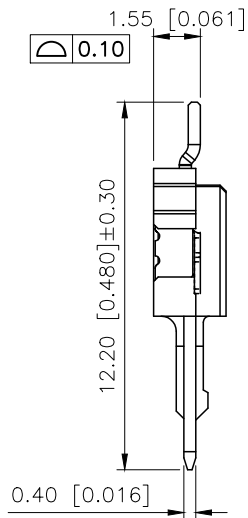


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.30	阿树

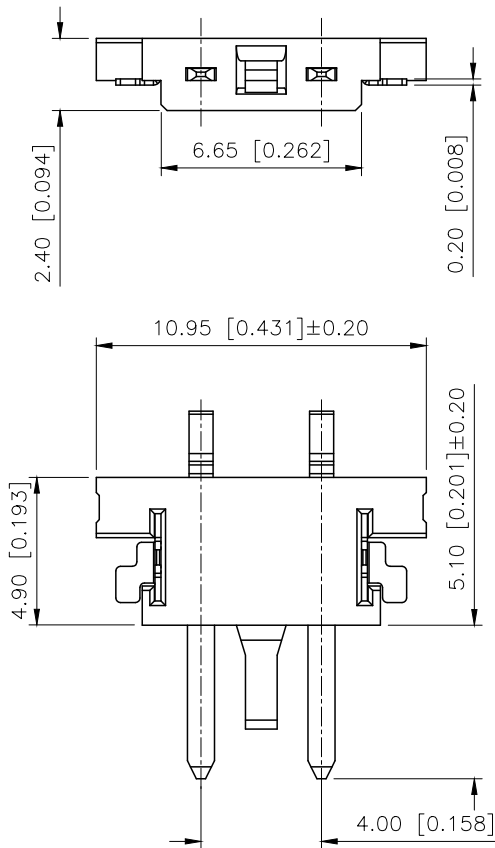


PCB_LAYOUT

Specifications:
规格:
Voltage rating:400V AC/DC
额定电压: 400V AC/DC
Current rating:1A AC/DC
额定电流: 1A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-40℃-+125℃
温度范围: -40℃-+125℃
Insulation resistance:≥1000MΩ min
绝缘电阻: ≥1000MΩ Min
Contact resistance:≤30mΩ
接触电阻: ≤30mΩ

PART NO.:

X4002 W M-XX-LP SW
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Category:M-Male
④Row No.Pin No:XX-02 Pin
⑤Material:LP-LCP UL 94V-0
⑥Plating:SW-Matte Tin

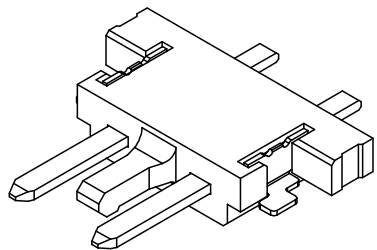

X4002WM-XX-LPSW	LCP	Phosphor Bronze	X4002WF
PART NO	Material	Material(Pin)	Suitable XKB Female
DESIGN	阿树	VIEW:	MODEL TYPE: 4.0mm BTB Connector
CHECKED		UNIT: mm/in	PART NO.: X4002WM-XX-LPSW
APPROVED		SIZE: A4	DWG NO.:
SCALE			PAGE
N/A			1/1
REVISION			A1

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO.,LIMITED