


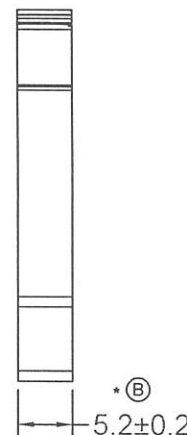
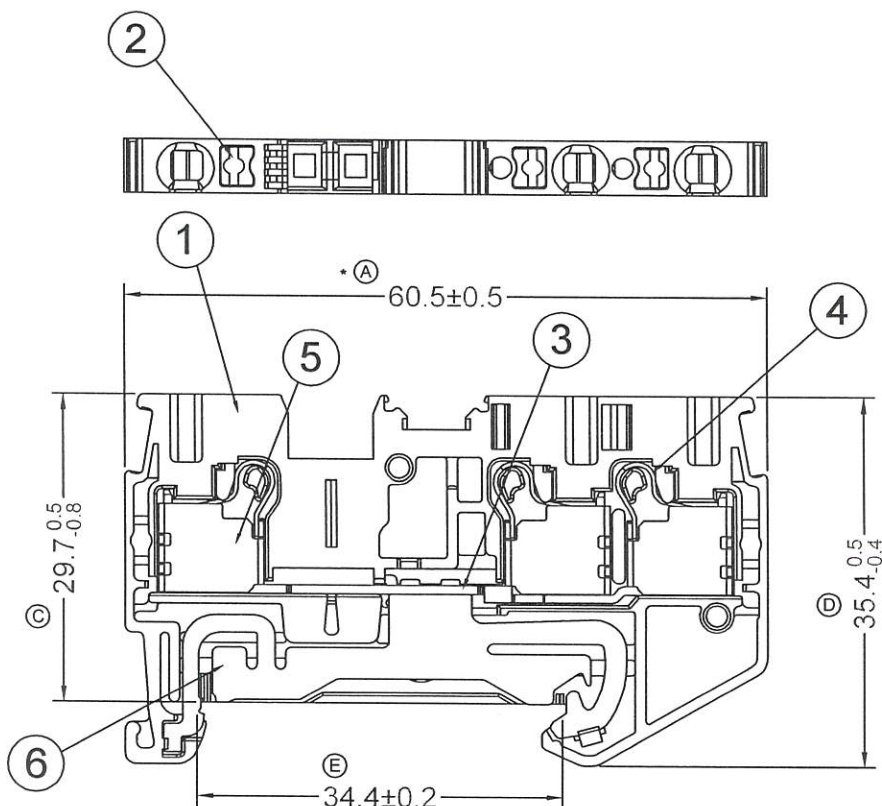


Type No.: DPT2.5/3-PE

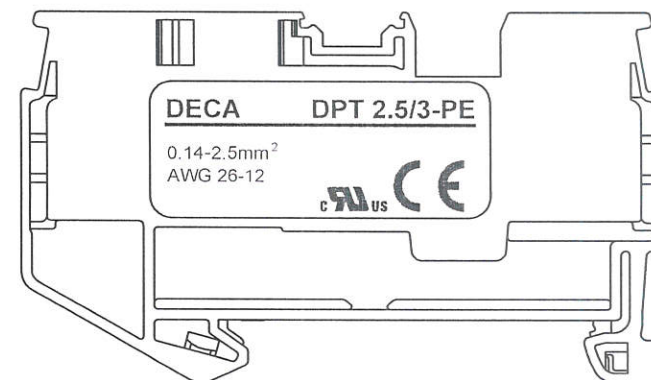

RoHS
Compliant

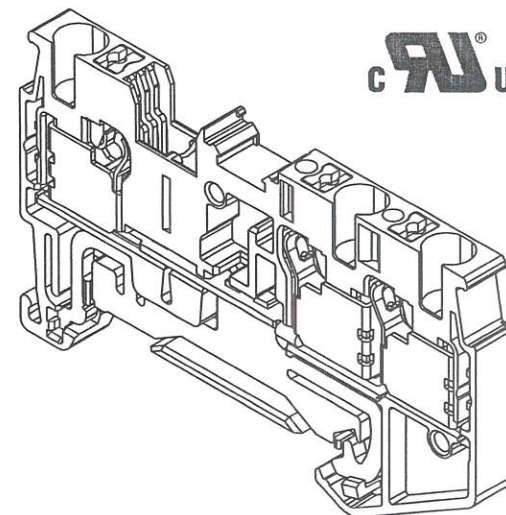

1. Rated voltage : 600V(UL)
2. Rated voltage : 800V(IEC)
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 8mm-10mm
6. Wire size : 26 - 12 AWG (0.14-2.5mm²)



CONFIRMED & ACCEPTED BY

	Material		QTY	Plating/Finish	Remark
1	Insulating body	Polyamide 66	1	Green & Yellow(MIX)	
2	Button	PBT	3		
3	Terminal	COPPER	1	Tin plated	
4	Spring	STAINLESS	3		
5	Shell	STEEL	3	Zinc plated	
6	Terminal	COPPER ALLOY	1	Tin plated	

DECA SwitchLab Inc.

PART NAME

UNIT

SCALE

Terminal Blocks

MM

☒

DESIGN

DATE

Eden
2020/10/05

CHECK

DATE

Sam
2020/10/05

APPROVE

DATE

geli
2020/10/05

DRAWING NO.

DPT2.5/3-PE

SHEET

1 / 1

B

REV.