

ICP401230UPR

Rechargeable Lithium Ion Polymer Battery Pack 3.7 V

Safety Circuit

Specifications

Renata Type	ICP401230
IEC Designation	ICP051331
Part Number	100642
Contact Method:	Wire AWG 30
Safety Circuit	Yes

Nominal Voltage	3.7 V
Nominal Capacity	130 mAh
Minimum Capacity	125 mAh (0.2C cut off 3.0 V at 20°C)
Internal Impedance	< 340 mΩ / 30% SOC

Thickness (t)	Max 4.5 mm
Length (l)	Max 31.0 mm
Width (w)	Max 12.7 mm
Weight	~ 3.5 g

Charging Characteristic

Voltage	CC/CV – Constant Current / Constant Voltage
Current Normal	4.2 V CV
Max. Charging Current	0.5 C CC – 65 mA
Temperature at Charging	1.0 C CC – 130 mA
	0 °C 45 °C


Discharge Characteristic

Cut off Voltage	3.0 V
Max discharge Current	2.0 C – 260 mA (for non continues discharge)
	1.0 C – 130 mA (for continues discharge)
Temperature during Discharge	-20 °C ... 60 °C

Cycle Life at Room Temperature	> 80% of minimum capacity after 500 cycles (0.5 C charge, 0.5 C discharge)
--------------------------------	--

Storage Temperature	-20 °C ... 45 °C (0 °C ... 30 °C recommended in case of storage for more than 3 months)
---------------------	---

Dimensions

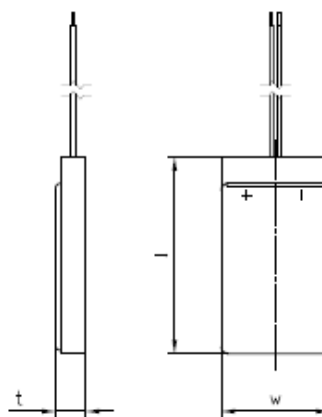

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the ASDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. ICP401230 V02 08/2019

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Renata:](#)

[ICP401230UPR](#)