

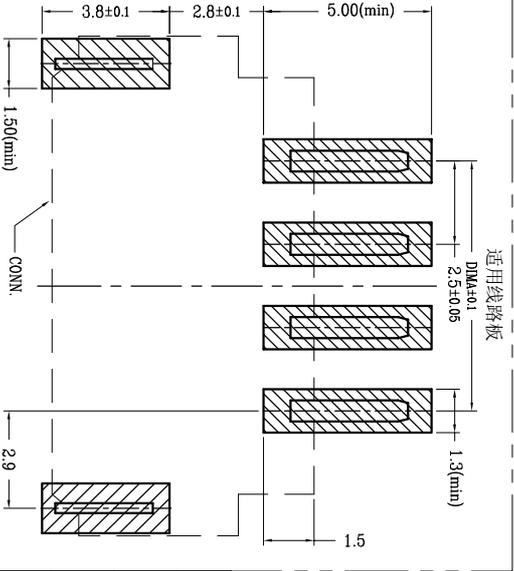
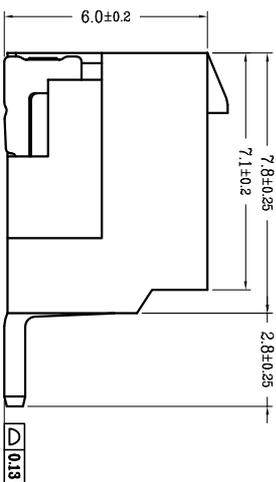
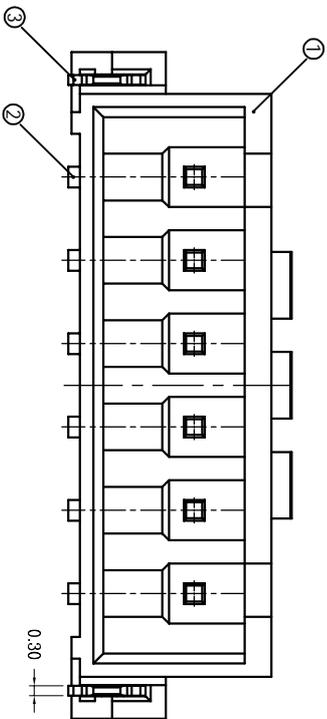


2~5P 结构样式

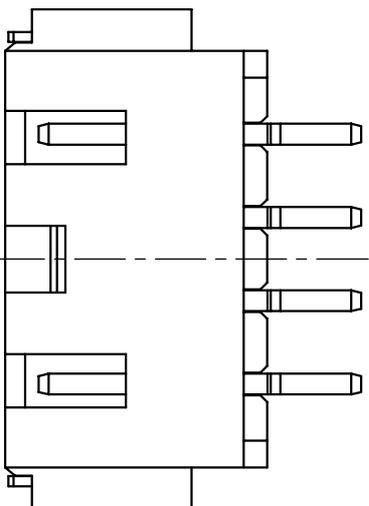

序号	品名	材质
①	2.50 K型卧式WTB胶芯	LCP UL94V-0 本色
②	2.50 M型卧式WTB端子	铜合金/表面镀锡
③	2.50 M型卧式WTB焊片	铜合金/表面镀锡

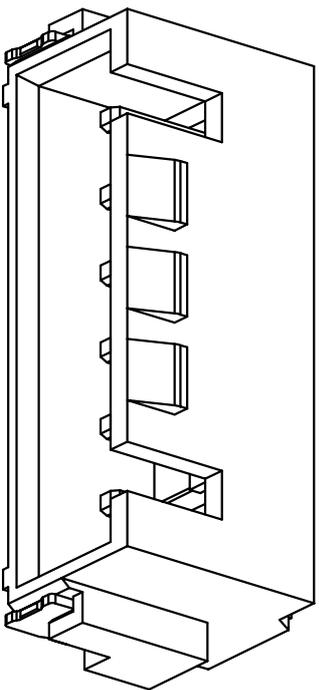

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 工作温度: -25° C~85° C.
3. 适用线规: AWG#30~#22.
4. 额定电压: 250V DC/AC(rms).
5. 额定电流: 3.0A.
6. 接触电阻: ≤20mΩ.
7. 耐压值: 1000V AC/mi nute.
8. 绝缘电阻: ≥1000MΩ.

CKT	DIM A	DIM B	DIM C
2	2.50	7.50	10.00
3	5.00	10.00	12.50
4	7.50	12.50	15.00
5	10.00	15.00	17.50
6	12.50	17.50	20.00
7	15.00	20.00	22.50
8	17.50	22.50	25.00
9	20.00	25.00	27.50
10	22.50	27.50	30.00
11	25.00	30.00	32.50
12	27.50	32.50	35.00
13	30.00	35.00	37.50
14	32.50	37.50	40.00
15	35.00	40.00	42.50
16	37.50	42.50	45.00

图号 (DWG NO) 单位 (UNIT): MM

深圳市万骏达电子有限公司
http://www.wanjunda.com

品名 (ITEM NO) 2.50 Pitch K型卧式WTB
料号 (PART NO) WF-HA2.5-n-P-WT
模号 (MODEL NO)

版本 (REV)
日期 (DATE)
设计 (DESIGN)
审核 (CHECKED)
核准 (APPROVED)

未注公差
X.X ±0.30
X.XX ±0.20
X.XXX ±0.15
X.X° ±2°