
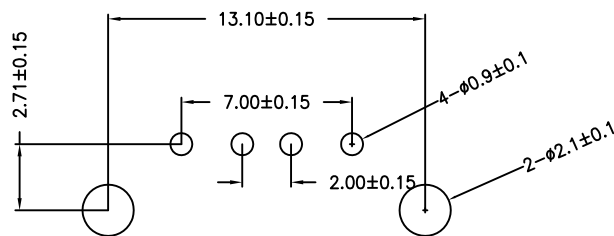
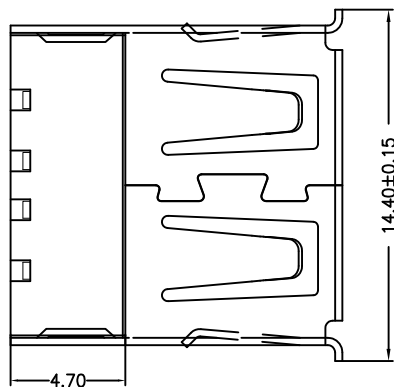
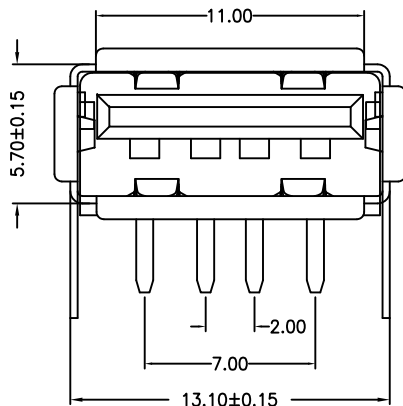


A/F无后盖有边直脚/DIP (5.85)

目錄 MAPX	设变内容 MODIFICATION	日期 DATE

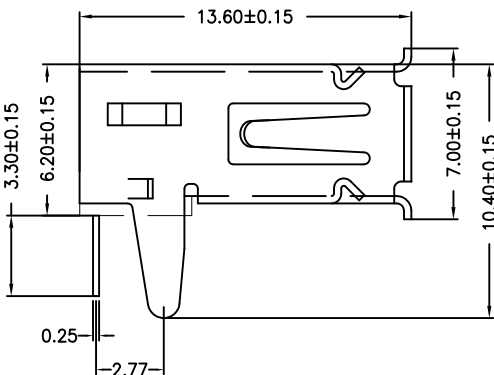

RBCOMMENDBD P.C.B PATTBRN LAYD UT

备注：侧弹分为外弹与内弹

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance: 30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	903-232A1014D10100
X.	±0.35	X'	±5"	比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.	AF90度无后盖直脚有边内弹改模后铜壳一型5.85PBT白胶 高6.2
.XX	±0.25	.XX'	±2"					角法 VIEW	⊕ ⊖
.XX	±0.15	.XX'	±1"	日期 DATE	2014. 05. 24	核准 APPD	雷永键	版本 VER	A0
.XXX	±0.10	.XXX'	±0.5"						