
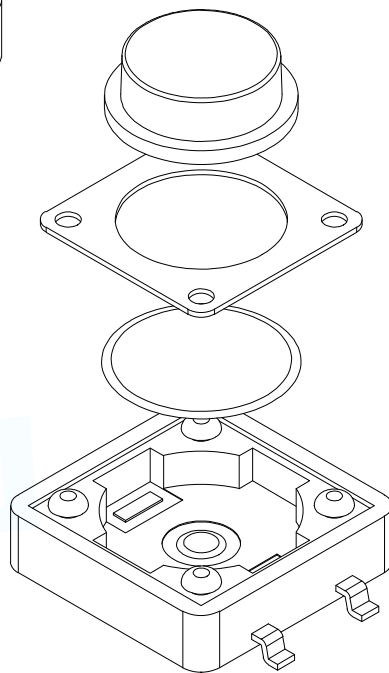
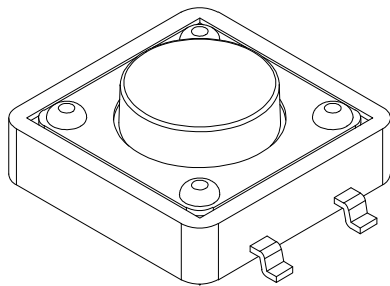
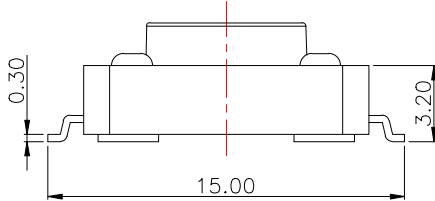


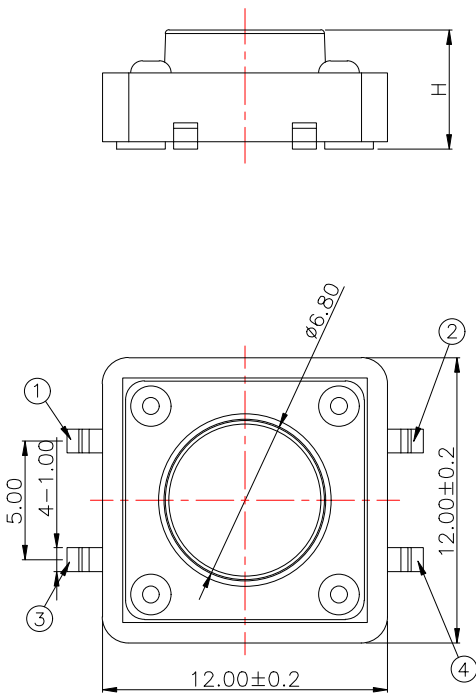

H
4.3
4.5
4.8
5.0
.....
18.0


TS-1003S- - - - -

弹片: A:不锈钢 B:覆磷铜
定位柱: R:无柱
高度: 043:4.3H 045:4.5H 048:4.8H 050:5.0H 055:5.5H
力度: 16:160g 26:260g


主要技术参数、性能

The Main Thchnology Performance

额定电流、电压 Rate voltage,current	50mA DC12V
接触电阻 Contact resistance	$\leq 100m\Omega$
按力 Operating force	$\pm 50gf$
行程 travel	$0.35\pm 0.10mm$
绝缘电阻 Insulated resistance	$\geq 100M\Omega$
介电强度 Dielectric strength	$\geq 250VAC/1min$



电路图
CIRCUIT DIAGRAM

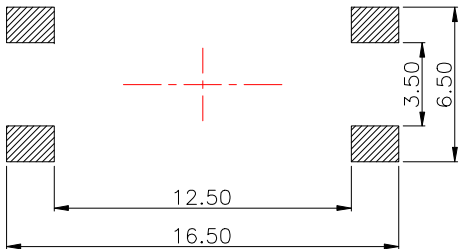

PCB.焊接图
PCB.WELDING DRAWING

E	按钮	PPA	1	黑色
D	盖板	铁盖板	1	镀铜锡
C	弹片	磷铜/不锈钢	1	镀银
B	本体	PPA	1	黑色
A	卡件	黄铜	1	镀银
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QTY	表面处理/颜色 FINSH/COLOR
MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: TACT SWITCH		
DECIMALS:		PAR		
0.5~2±0.10		DWN		
2~5±0.25		CHKD		
5~10±0.30		APVD		
ANGLES:		SCALE1:1		
±0.5°		UNIT:MM		
		CUSTOMER COPY		
		SIZE:A4		
		SHEET:1F1		
		REV:A		