



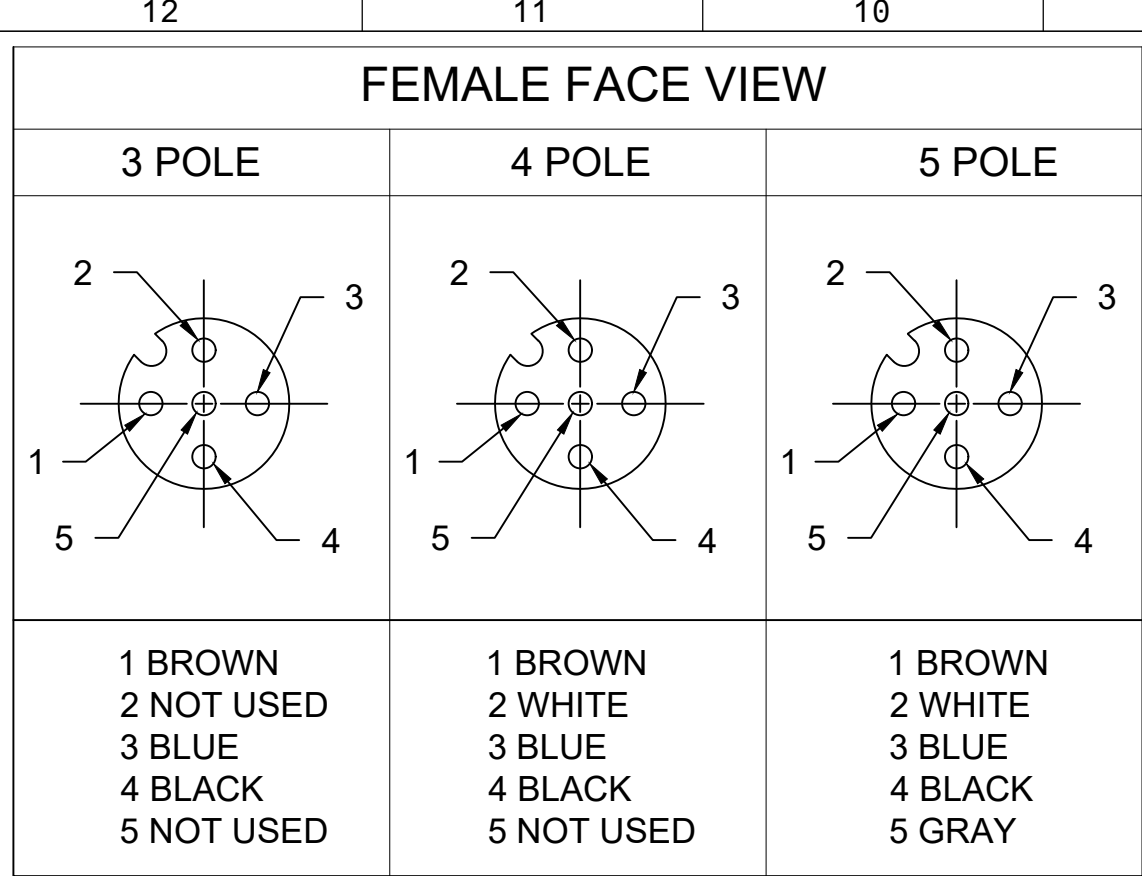


9 8 7 6 5 4

PART NO.	ENGINEERING NO.	FINISHED LENGTH	POLES	CABLE DIA.
1200660675	883030K05M005	0.5M [1FT 8 IN]	3	.20[5.1]
1200660695	884030K05M100	10M [32FT 10 IN]	4	.21[5.3]
1200662239	885030K05M300	30M [98FT 5 IN]	5	.23[5.8]

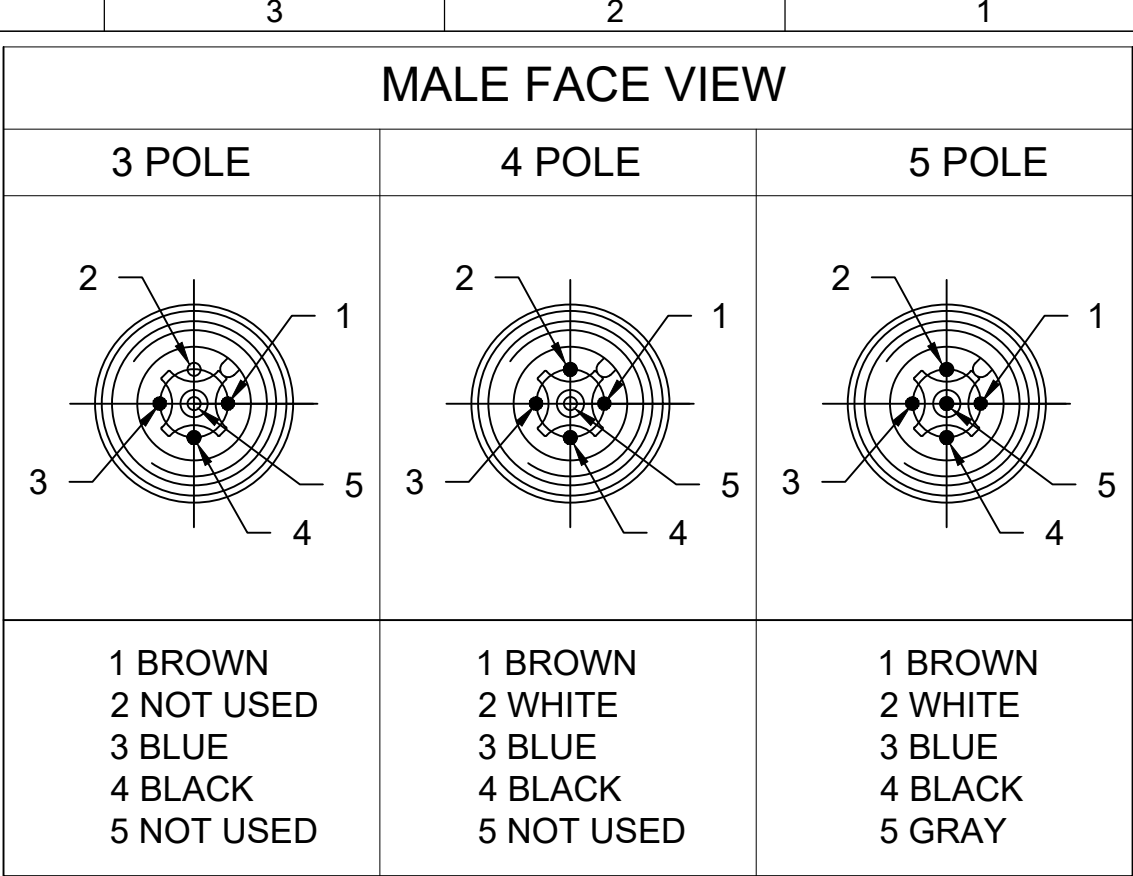


NOTES:

1. MATERIAL: AS NOTED
2. FINISH: AS NOTED
3. ELECTRICAL:
VOLTAGE: 250V
CURRENT: 4A
4. TEMP RATING: -20°TO +105°C
5. PROTECTION: IP67 (WHEN MATED)
6. COUPLING THREAD: M12 X 1
7. UL RECOGNIZED FILE: E152210
CSA CERTIFIED FILE: LR6837
8. ALL DIMENSIONS ARE FOR REFERENCE
UNLESS TOLERACED OR NOTED OTHERWISE

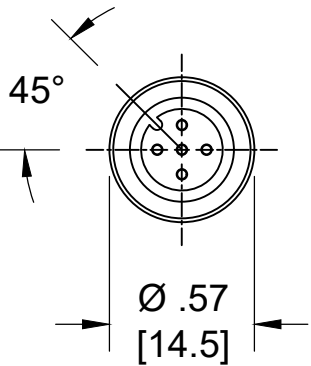

FEMALE FACE VIEW

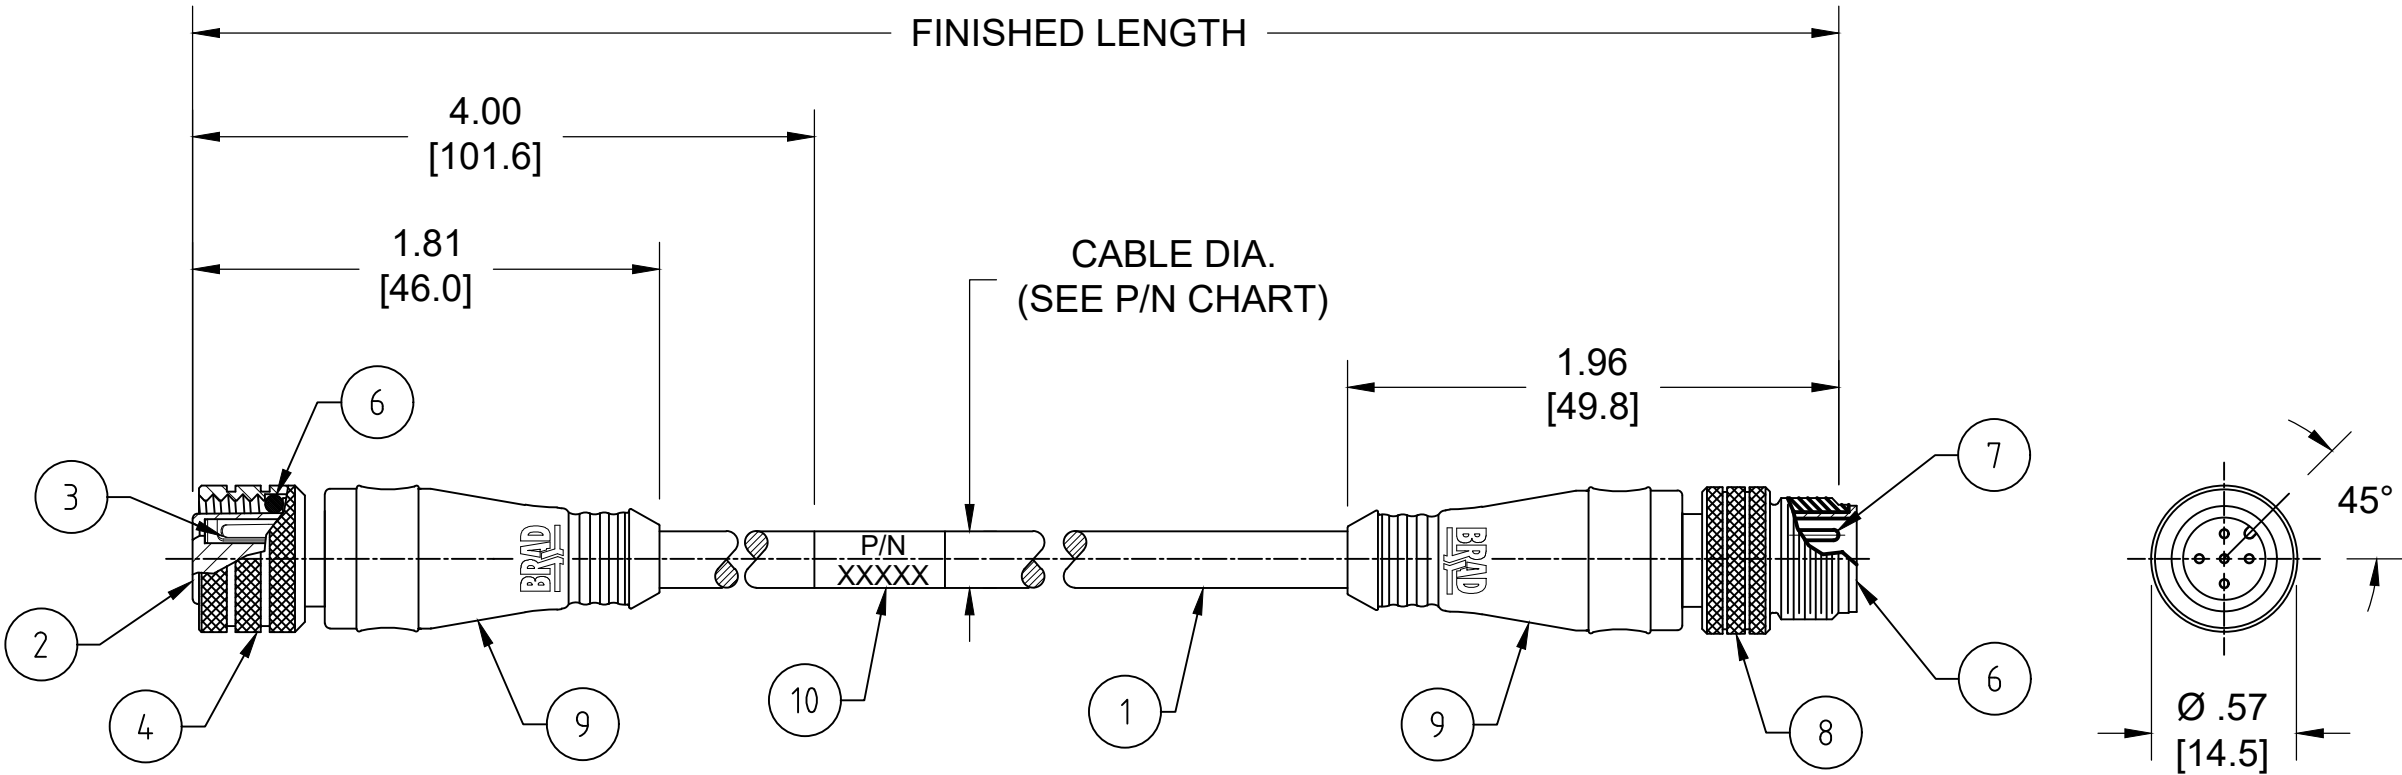

MALE FACE VIEW

CABLE FLEX CHARACTERISTICS

TORSIONAL FLEX TEST	5 MILLION CYCLES PER MIL-C-13777G
BEND FLEX TEST	6.5 MILLION CYCLES PER MIL-C-13777G
DRAG CHAIN TEST	20 MILLION CYCLES PER MIL-C-13777G
WELD SLAG RESISTANCE	WOODHEAD STANDARD S-300

10	WRAP LABEL	VINYL	BLACK/WHITE
9	OVERMOLD	TPC	YELLOW
8	MALE COUPLING NUT	BRASS	NICKEL PLATED
7	CONTACT PIN	COPPER ALLOY	GOLD PLATED
6	MALE INSERT	PUR	BLACK
5	O-RING	VITON	RED
4	FEMALE COUPLING NUT	BRASS	NICKEL PLATED
3	CONTACT SOCKET	COPPER ALLOY	GOLD PLATED
2	FEMALE INSERT	PUR	BLACK
1	#22/3-5 AWG CABLE	TPE JACKET	YELLOW
ITEM	DESCRIPTION	MATERIAL	FINISH

DOCUMENT STATUS	P1	RELEASE DATE	2024/05/13 19:38:53
-----------------	----	--------------	---------------------

PART NUMBER LEGEND

883030K05M005

POLES: 3,4 & 5

CABLE TYPE
22AWG
TPE YELLOW

FINISHED LENGTH:
M005 = 0.5 METER
M010 = 1 METER
M100 = 10 METER

CABLE LENGTH TOLERANCES

<.3M [1FT]: +19mm-0 [+.75in-0]
.3 - .9M [1 - 3FT]: +44.5mm-0 [+1.75in-0]
.9 - 1.8M [3 - 6FT]: +55.6mm-0 [+2.19in-0]
1.8 - 3.7M [6 - 12FT]: +88.9mm-0 [+3.50in-0]
3.7 - 7.3M [12 - 24FT]: +165.1mm-0 [+6.50in-0]
7.3-14.6M [24 - 48FT]: +317.5mm-0 [+12.50in-0]
14.6 - 30.5M [48-100FT]: +622.3mm-0 [+24.50in-0]
OVER 30M [100FT] +2% OF FINISHED LENGTH

FUNCTIONAL SYMBOLS F A =0 F E =0 E P =0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					molex MICRO-CHANGE CORDSET, M12 3-5 POLE, MALE-FEMALE, STRAIGHT, SINGLE KEY, #22AWG TPE CABLE					
	DIMENSION UNITS INCH/MM		SCALE NTS		CURRENT REV DESC: ITEM-9 WAS TPE. ITEM-10 WAS BLACK/YELLOW. MODIFIED CABLE FLEX CHART....., TEMP RATING AND PART NUMBER CHART						
	GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 785985			PRODUCT CUSTOMER DRAWING				
		mm	INCH	DRWN: ABENJAMINLW 2024/05/07							
	4 PLACES	± ----	± ----	CHK'D: PDODDAMANEMY 2024/05/13							
3 PLACES	± ----	± ----	APPR: BWOODMAN 2024/05/13								
DIVISIONAL SYMBOLS	2 PLACES		± ----	± ----	INITIAL REVISION:		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	1 PLACE		± ----	± ----	DRWN: LSTEMMLE 2010/01/25		SD-120066-011		PSD	001	C
	0 PLACES		± ----	± ----	APPR: NSTAUDIG 2010/01/29						
	ANGULAR TOL		± ---- °								
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER	
				C-SIZE	120066	SEE CHART	GENERAL MARKET		1 OF 1		