

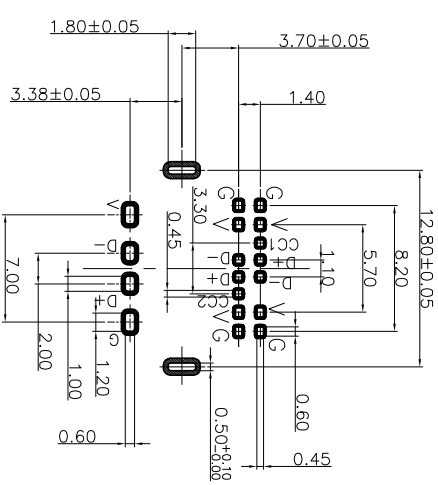
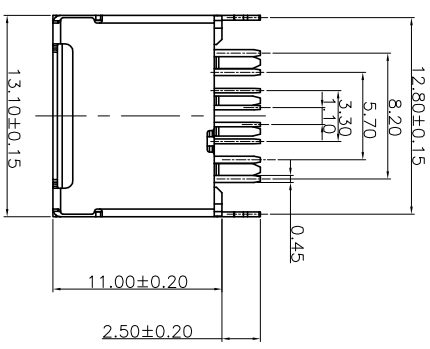





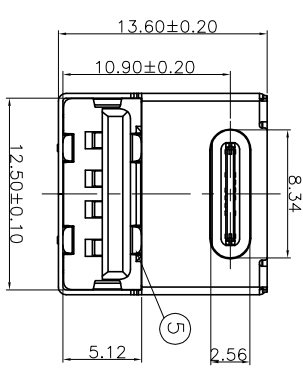

Recommended P.C.B Layout
Tolerance: ±0.05



- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 3A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)	单位 (UNIT): MM
品名 (ITEM NO)	TYPE C 14PIN母座+USB2.0单面插二合一	本 (REV)	比例 (SCALE) 1:1
料号 (PART NO)	TPC-USB-2IN1-ZC	日期 (DATE)	公差 (TOLERANCE) UNLESS SPECIFIED
模号 (MODEL NO)		设计 (DESIGN)	X.X ±0.38
		审核 (CHECKED)	X.XX ±0.15
		核准 (APPROVED)	X.XXX ±0.10
			X.X ±2°