

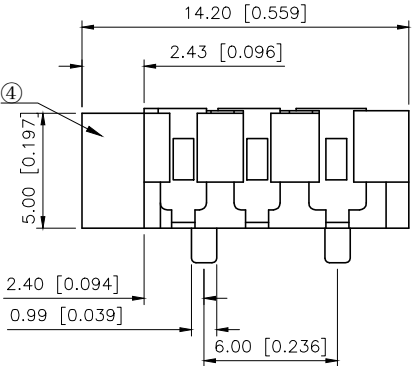
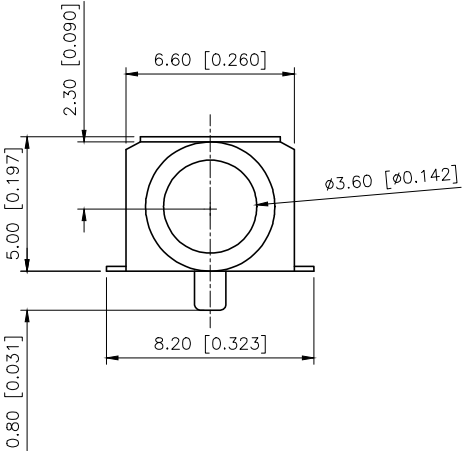
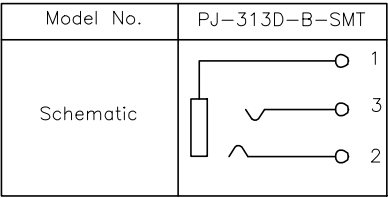


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树

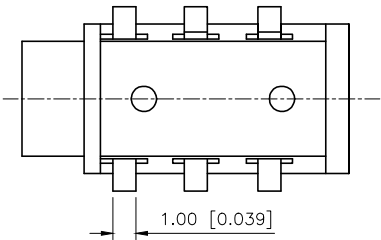

Specifications:
Voltage rating:30V AC/DC
Current rating:0.5A AC/DC
Withstanding voltage:500V AC/minute
Temperature range:-40°~+55
Insulation resistance:≥100MΩ
Contact resistance:≤30mΩ
After environmental testing:≤20mΩ
Operating Life(Cycles):5000
Mating Force:3-20N

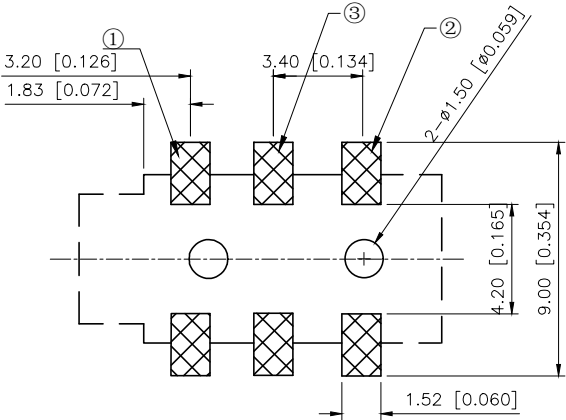

Plastic	PA	
Terminal 3	Phosphor Bronze	Ag
Terminal 2	Phosphor Bronze	Ag
Terminal 1	Phosphor Bronze	Ag
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-313D-B-SMT
APPROVED		SIZE:	A4	DWG NO.:	