

UP2.8B

UNI-PAC™ low profile drum core power inductors



Applications

- DC-DC converters
- Filter inductors
- Signal conditioning
- Energy storage applications
- Computer and battery powered equipment
- Handheld/portable devices
- Gaming machines/consoles

Product features

- Miniature size and rugged construction
- Low DCR and high efficiency
- Designed for high shock environments
- Frequency range 1 kHz to 2 MHz
- Ferrite core material

Environmental data

- Storage temperature range (component):
-40 °C to +125 °C
- Operating temperature range: -40 °C to +125 °C
(ambient plus self-temperature rise)
- Solder reflow temperature:
J-STD-020 (latest revision) compliant

RoHS



Powering Business Worldwide


Product specifications

Part Number	Ordering Code	OCL (1) $\mu\text{H} \pm 20\%$	I _{rms} (2) (A)	I _{sat} (3) (A)	DCR (4) Ohms (Max.)
UP2.8B-1R0-R	UP2-8B-1R0-R	0.98	3.6	8.0	.0286
UP2.8B-1R5-R	UP2-8B-1R5-R	1.59	3.3	6.4	.0349
UP2.8B-2R2-R	UP2-8B-2R2-R	2.44	3.1	5.2	.0356
UP2.8B-3R3-R	UP2-8B-3R3-R	3.24	2.8	4.5	.0474
UP2.8B-4R7-R	UP2-8B-4R7-R	4.15	2.7	3.9	.0478
UP2.8B-6R8-R	UP2-8B-6R8-R	6.73	2.4	3.2	.067
UP2.8B-100-R	UP2-8B-100-R	10	2.1	2.7	.080
UP2.8B-150-R	UP2-8B-150-R	15	1.7	2.2	.120
UP2.8B-220-R	UP2-8B-220-R	22	1.5	1.7	.190
UP2.8B-330-R	UP2-8B-330-R	33	1.3	1.5	.250
UP2.8B-470-R	UP2-8B-470-R	47	1.0	1.2	.340
UP2.8B-680-R	UP2-8B-680-R	68	.89	1.0	.480
UP2.8B-101-R	UP2-8B-101-R	100	.78	.84	.622
UP2.8B-151-R	UP2-8B-151-R	150	.62	.74	.971

1) Open Circuit Inductance Test Parameters: 100 kHz, 0.250 Vrms, 0.0 Adc
2) RMS current, delta temp. of 40 °C ambient temperature of +85 °C

3) Peak current for approximately 10% roll-off @ +20 °C
4) Values @ +20 °C


Dimensions-mm

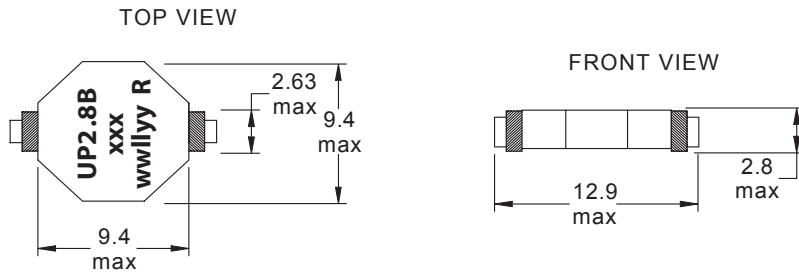

wwllly = date code R = (revision level)
xxx = Inductance value per family chart


Do not route traces or vias underneath the inductor

Recommended PCB Layout




Component View

Packaging information-mm

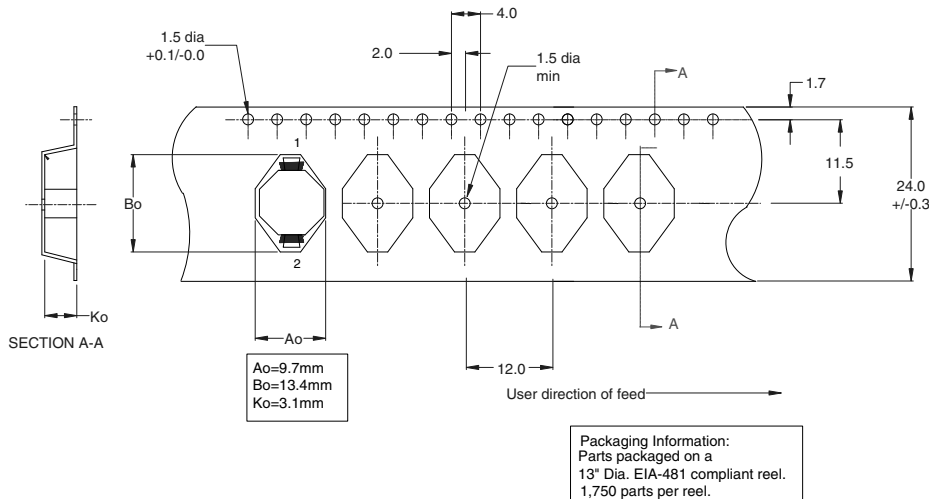

Inductance characteristics

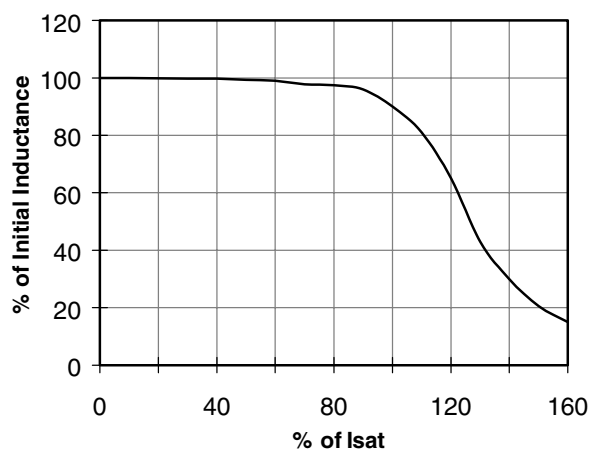

Solder Reflow Profile

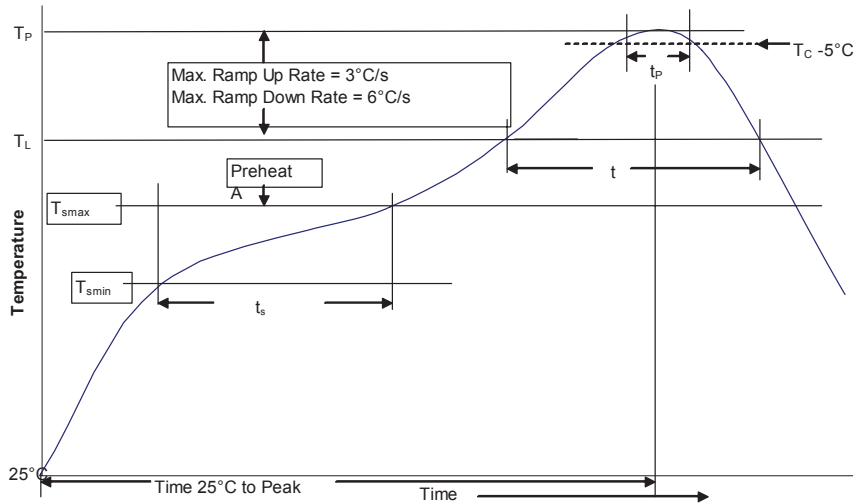


Table 1 - Standard SnPb Solder (T_p)

Package Thickness	Volume mm^3 <350	Volume mm^3 ≥ 350
<2.5mm	235°C	220°C
$\geq 2.5mm$	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_p)

Package Thickness	Volume mm^3 <350	Volume mm^3 350 - 2000	Volume mm^3 >2000
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JDEC J-STD-020

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T_{smin})	100°C	150°C
• Temperature max. (T_{smax})	150°C	200°C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T_{smax} to T_p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_c)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_p to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 4106
August 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

[UP2.8B-150-R](#) [UP2.8B-330-R](#) [UP2.8B-390-R](#) [UP2.8B-270-R](#)