



FEATURES

- Output voltage levels are compatible with input levels of CMOS and TTL integrated circuits
- Meets All EIA/TIA-232E and V.28/V.24 Specifications
- Supply voltage range from 5.5V
- Low input current: 1.0 μ A at 25°C
- Output current 30mA
- Available in SOP-16 Package



PIN 1

**SOP-16
(SOIC-16)**

APPLICATIONS

- Portable Computers
- Battery-Powered RS-232 Systems
- Interface Translation
- Low-Power Modems
- Terminals

ORDERING INFORMATION

Device	Package
MAX232ESE	SOP-16(SOIC-16)

* Refer to the ordering information for the details.

DESCRIPTION

The MAX232ESE is a dual driver/receiver of RS-232 standard with a single supply voltage and bipolar output voltage of the transmitter formed by a built-in voltage multiplying generator on four 1.0 μ F external capacitors, designed for use in state-of-the-art high performance computing systems, high-speed electronic devices with high reliability of information exchange between remote objects.

Input voltage levels are compatible with standard CMOS and TTL levels.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	V_{CC}	-0.3	6.0	V
Transmitter High Output Voltage	V_+	$V_{CC}-0.3$	9.8	V
Transmitter Low Output Voltage	V_-	-9.0	0.3	V
Transmitter Input Voltage	V_{TIN}	-0.3	$V_++0.3$	V
Receiver Input Voltage	V_{RIN}	-20	20	V
Voltage Applied to Transmitter Output	V_{TOUT}	$V_- - 0.3$	$V_+ + 0.3$	V
Voltage Applied to Receiver Output	V_{ROUT}	-0.3	$V_{CC} + 0.3$	V
Storage Temperature Range	T_{STG}	-65	150	°C




RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	V_{CC}	4.5	5.5	V
Transmitter Input Voltage	V_{TIN}	0	V_{CC}	V
Receiver Input Voltage	V_{RIN}	-20	20	V
Output Current of Transmitter Short Circuit	I_{SC}	-	± 60	mA
Ambient Temperature Range	T_A	-40	+85	$^{\circ}C$


ORDERING INFORMATION

Package	Oder No.	Package Marking	Compliance	Supplied As
SOP-16(SOIC-16)	MAX232ESE	MAX232ESE	RoHS, Green	Tube

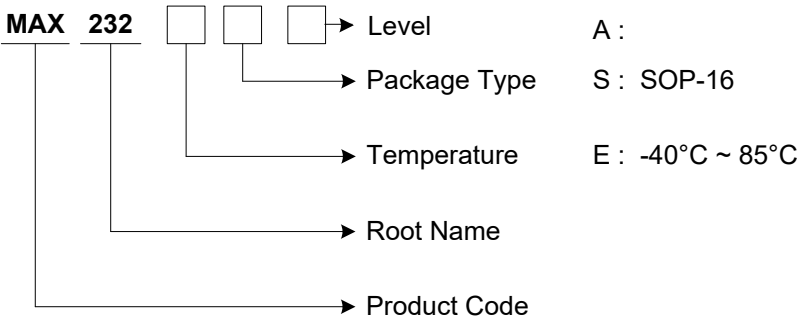



PIN CONFIGURATION

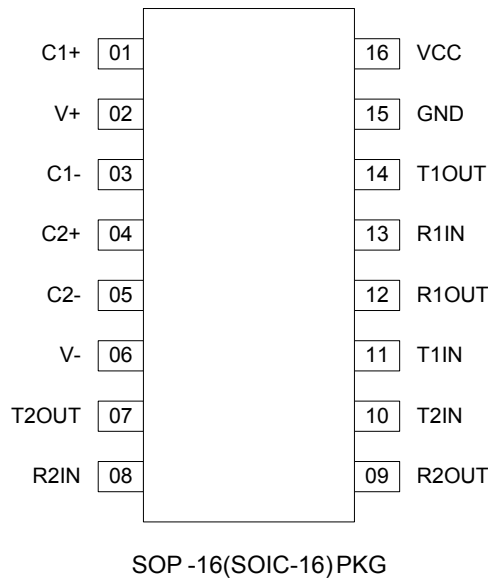


PIN DESCRIPTION

Pin No.	Pin Name	Pin Description
1	C1+	Terminal for Positive Charge-Pump C1 Capacitor
2	V+	Positive Voltage Generated by the Charge-Pump
3	C1-	Terminal for Negative Charge-Pump C1 Capacitor
4	C2+	Terminal for Positive Charge-Pump C2 Capacitor
5	C2-	Terminal for Negative Charge-Pump C2 Capacitor
6	V-	Negative Voltage Generated by the Charge-Pump
7	T2OUT	RS-232 Driver Output (Levels RS-232)
8	R2IN	RS-232 Receiver Input (Levels RS-232)
9	R2OUT	RS-232 Receiver Output (Levels TTL/CMOS)
10	T2IN	RS-232 Driver Input (Levels TTL/CMOS)
11	T1IN	RS-232 Driver Input (Levels TTL/CMOS)
12	R1OUT	RS-232 Receiver Output (Levels TTL/CMOS)
13	R1IN	RS-232 Receiver Input (Levels RS-232)
14	T1OUT	RS-232 Driver Output (Levels RS-232)
15	GND	Ground
16	VCC	Supply Voltage Input



TYPICAL APPLICATION CIRCUIT

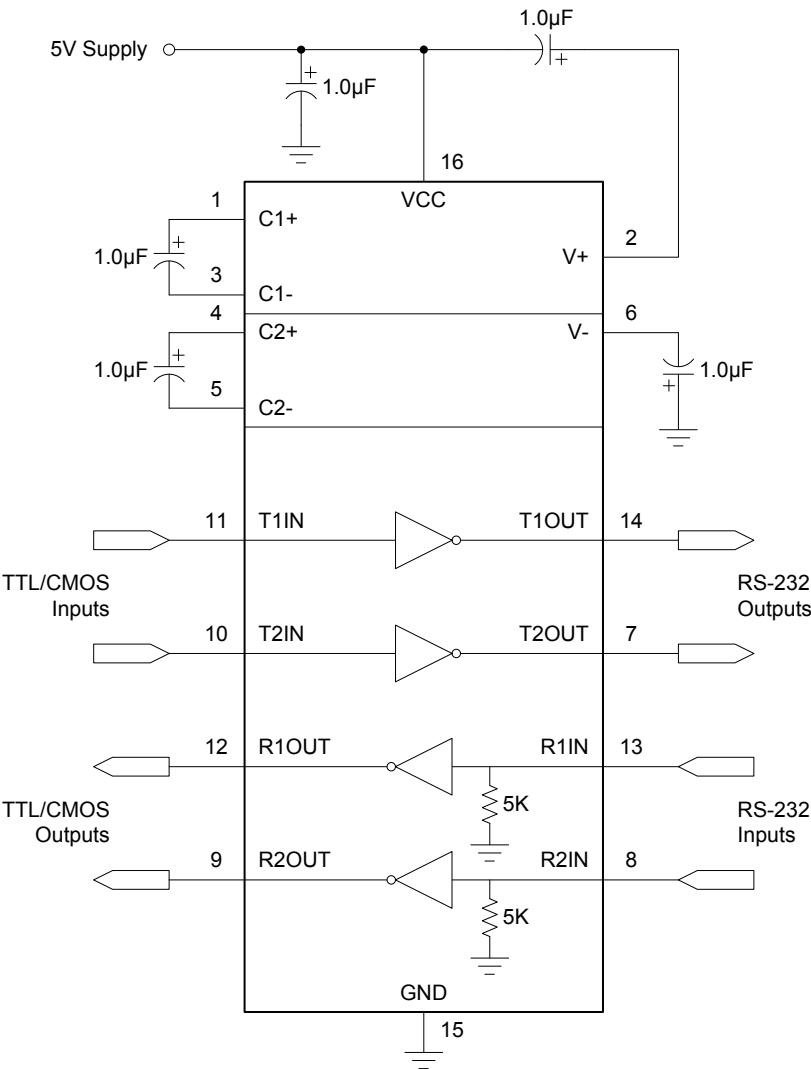

FUNCTION TABLE

INPUT (RIN, TIN)	OUTPUT (ROUT, TOUT)
L (Low Level)	H (High Level)
H (High Level)	L (Low Level)



ELECTRICAL CHARACTERISTICS

(Limits in standard typeface are for $T_A=25^{\circ}\text{C}$, and the limits in boldface type apply over full operating temperature range.)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Supply Current	I _{CC}	V _{CC} = 5.5V V _{IL} = 0V		-	-	10.0 14.0	mA
Receiver Parameters							
Hysteresis Voltage	V _h	V _{CC} = 5.0V		0.2 0.2	-	0.9 1.0	V
On (Operation) Voltage	V _{on}	V _O ≤ 0.1V, I _{OL} ≤ 20μA		-	-	2.4 2.3	V
Off (Dropout) Voltage	V _{off}	V _O ≥ V _{CC} - 0.1V I _{OH} ≤ -20μA		0.8 0.9	-	-	V
Output Low Voltage	V _{OL}	I _L = 3.2mA, V _{CC} = 4.5V, V _{IH} = 2.4V		-	-	0.3 0.4	V
Output High Voltage	V _{OH}	I _{OH} = -1.0mA, V _{CC} = 4.5V, V _{IL} = 0.8V		3.6 3.5	-	-	V
Input Resistance	R _I	V _{CC} = 5.0V		3.0 3.0	-	7.0 7.0	kΩ
Transmitter Parameters							
Output Low Voltage	V _{OL}	V _{CC} = 4.5V, V _{IH} = 2.0V, R _L = 3.0kΩ		-	-	-5.2 -5.0	V
Output High Voltage	V _{OH}	V _{CC} = 4.5V, V _{IL} = 0.8V, R _L = 3.0kΩ		5.2 5.0	-	-	V
Input Low Current	I _{IL}	V _{CC} = 5.5V, V _{IL} = 0V		-	-	-1.0 -10.0	μA
Input High Current	I _{IH}	V _{CC} = 5.5V, V _{IH} = V _{CC}		-	-	1.0 10.0	μA
Speed Of Output Front Charge	SR	V _{CC} = 5.0V, C _L = 50 - 1000pF, R _L = 3.0 - 7.0kΩ		3.0 2.7	-	30 27	V/μs
Output Resistance	R _O	V _{CC} = V ₊ = V ₋ = 0V V _O = ±2V		350 300	-	-	Ω
Short Circuit Output Current	I _{SC}	V _{CC} = 5.5V V _O = 0V	V _I = V _{CC}	-	-	-50 -60	mA
			V _I = 0	-	-	50 60	
Speed Of Information Transmission	ST	V _{CC} = 4.5V, C _L = 1000pF, R _L = 3.0kΩ, t _w = 7μs (for extreme, t _w = 8μs)		140 120	-	-	kbit/s
Dynamic Parameters							
Signal Propagation Delay Time When Switching On (Off)	t _{PHLR} (t _{PLHR})	V _{CC} = 4.5V, C _L = 150pF, V _{IL} = 0V, V _{IH} = 3.0V, t _{LH} = t _{HL} ≤ 10ns		-	-	9.7 10.0	μs
Signal Propagation Delay Time When Switching On (Off)	t _{PHLT} (t _{PLHT})	V _{CC} = 4.5V, C _L = 2500pF, V _{IL} = 0V, V _{IH} = 3.0V, R _L = 3kΩ, t _{LH} = t _{HL} ≤ 10ns		-	-	5.0 6.0	μs

[illegible]

Figure 1. t_{PHL} and t_{PLH} waveforms of Receiver


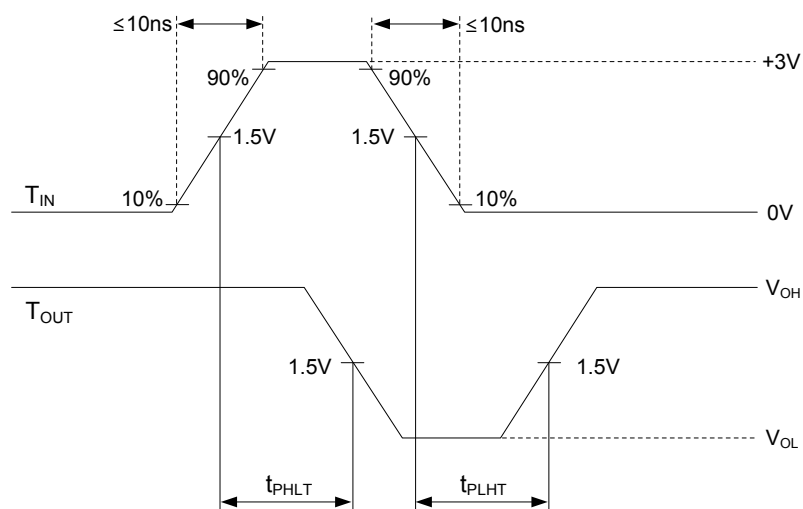


Figure 2. t_{PHL} and t_{PLH} waveforms of Transmitter



The description in this datasheet is subject to change without any notice to describe its electrical characteristics properly.



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.