


PART NUMBER	STUD SIZE	WIRE RANGE mm ²	DIMENSIONS mm				
			A ^{±1.02} (.04)	W ^{±.25} (.01)	C ^{MIN}	B ^{±.25} (.01)	M ^{±1.02} (.04)
PMNF6-4F	M4	4,0-6,0 (12-10)	25,78 (1.02)	7,92 (.31)	6,20 (.24)	1,02 (.04)	20,02 (.79)
PMNF6-5F	M5	4,0-6,0 (12-10)	25,78 (1.02)	9,53 (.38)	6,20 (.24)	1,02 (.04)	20,02 (.79)
PMNF6-6F	M6	4,0-6,0 (12-10)	28,52 (1.12)	10,97 (.43)	8,20 (.32)	1,02 (.04)	22,17 (.87)

NOTES:

- USED FOR:
A. 600V MAX. VOLTAGE RATING
B. 105°C (221°F) MAX. TEMP. RATING
C. SOLID & STRANDED COPPER WIRE
- SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- MATERIAL:
A. STAMPING: COPPER, TIN PLATED
B. HOUSING: NYLON, YELLOW
C. SLEEVE: BRASS, TIN PLATED
- WIRE STRIP LENGTH: $7,1^{+8}_{-0}$ ($9/32^{+1/32}_{-0}$)
- INSTALLATION TOOLS:
CT-1550, CT-2500 WITH CT-2550CH CRIMP HEAD
- DIMENSIONS IN BRACKETS ARE IN INCHES OR AWG

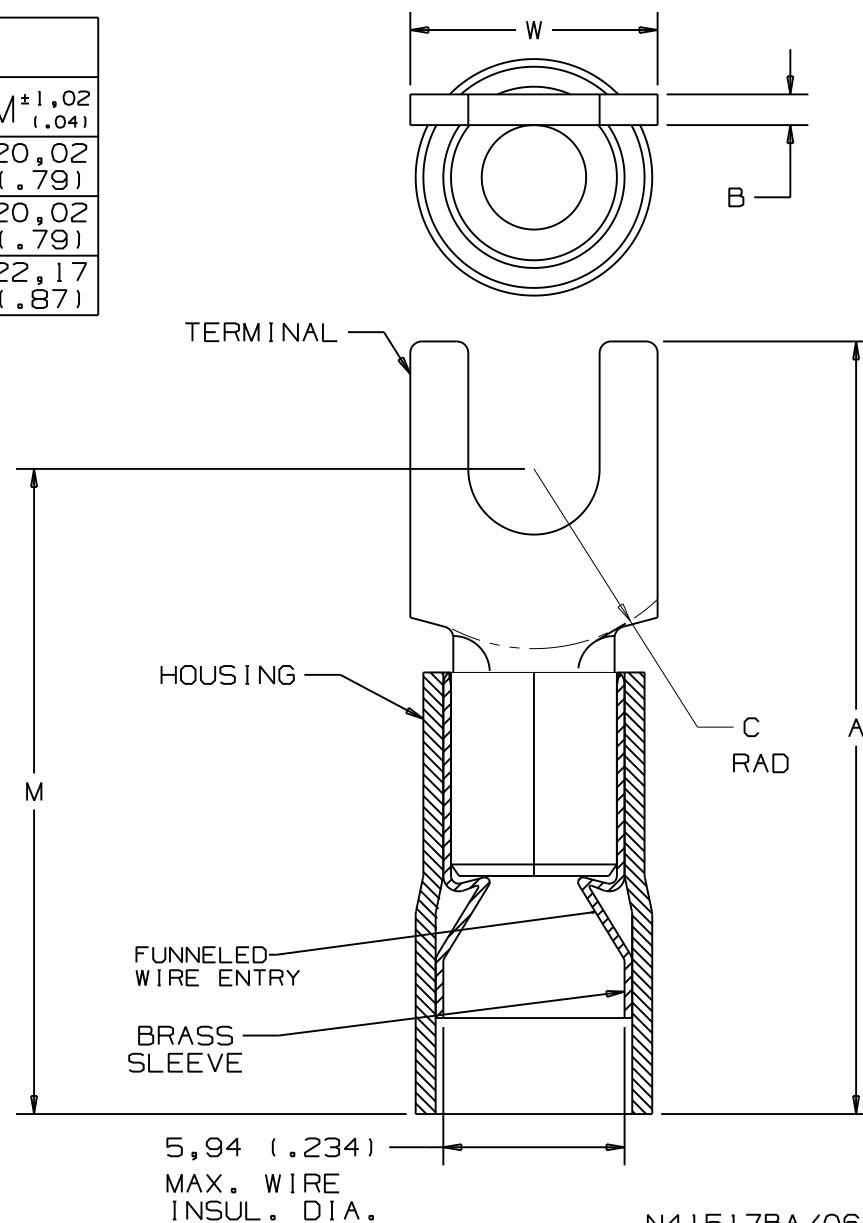

N41517BA/06

06	2/20/11	FS		Obsolete installation tools removed, UL information clarified, general dimensional updates.				PANDUIT CORP. TINLEY PARK, ILLINOIS 4,0-6,0 mm ² METRIC NYLON INSULATED, FUNNELED ENTRY FORK TERMINAL
05	10/97	TM		CHANGED DECIMAL POINTS TO COMMAS				
04	2/97	JKD	SKB	ADDED CT-1551M TO NOTES	05704	LA	DBH	
03	1/97	TM	RLS	UPDATE DIMENSIONS FILESPEC WAS NPC_A41517_02	05428	LA	DBH	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY BDK CHK'D LM SCALE NONE DRAWING NO. A41517