




Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

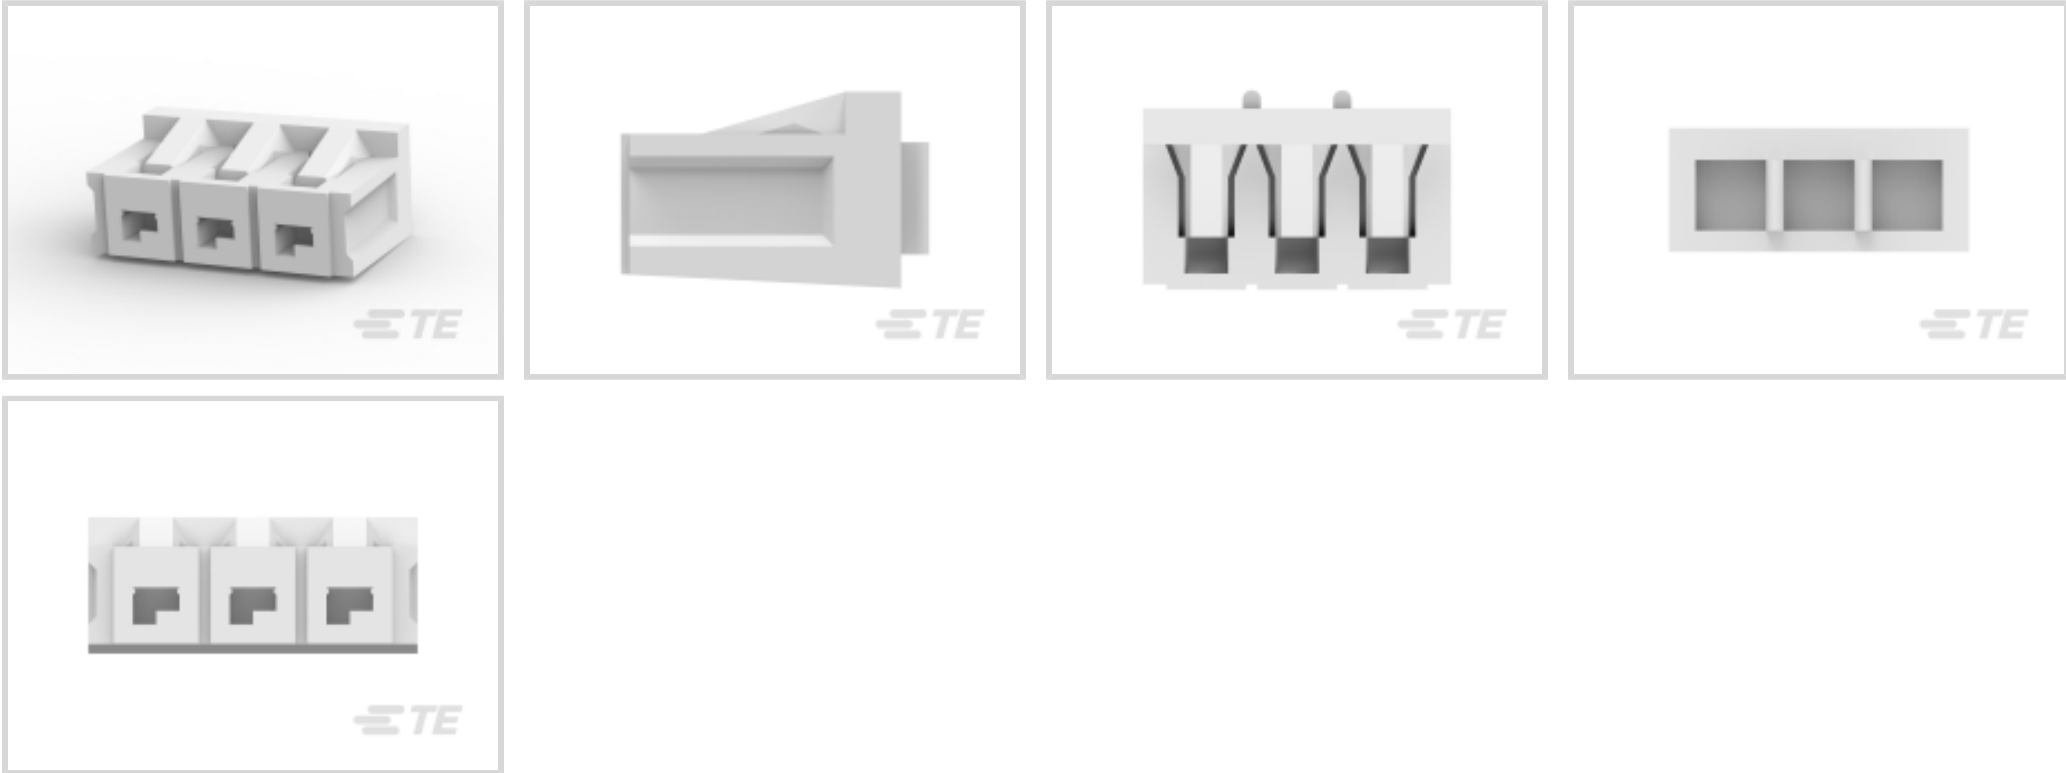

Connector Product Type: **Housing**  
Connector & Housing Type: **Housing for Male Terminals**  
Connector System: **Wire-to-Board**  
Number of Positions: **3**  
Centerline (Pitch): **2.5 mm [ .098 in ]**

Features

Product Type Features

|                                   |                            |
|-----------------------------------|----------------------------|
| Connector Product Type            | Housing                    |
| Connector & Housing Type          | Housing for Male Terminals |
| Connector System                  | Wire-to-Board              |
| Sealable                          | No                         |
| Connector & Contact Terminates To | Wire & Cable               |

Configuration Features

|                     |   |
|---------------------|---|
| Number of Positions | 3 |
| Number of Rows      | 1 |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 250 VAC |
|-------------------|---------|

Body Features

|                       |         |
|-----------------------|---------|
| Primary Product Color | Natural |
|-----------------------|---------|

Contact Features

|                       |       |
|-----------------------|-------|
| Contact Base Material | Brass |
|-----------------------|-------|



|   |   |
|---|---|
| Contact Current Rating (Max)                                    | 4 A   |
| Termination Features  |   |
| Termination Method to Wire & Cable                              | Crimp   |
| Mechanical Attachment   |   |
| Mating Retention  | Without   |
| Connector Mounting Type   | Cable Mount (Free-Hanging)  |
| Housing Features  |   |
| Housing Material  | 66 Nylon  |
| Centerline (Pitch)  | 2.5 mm[.098 in]   |
| Dimensions  |   |
| Wire Size   | .05 – .125 mm <sup>2</sup>  |
| Usage Conditions  |   |
| Operating Temperature Range                                     | -40 – 105 °C[-40 – 221 °F]  |
| Operation/Application   |   |
| Circuit Application   | Signal  |
| Industry Standards  |   |
| Compatible With Agency/Standards Products                       | UL  |
| UL Flammability Rating  | UL 94V-0  |
| Packaging Features  |   |
| Packaging Quantity  | 2000  |
| Packaging Method  | Bag   |
| Product Compliance  |   |
| For compliance documentation, visit the product page on TE.com> |   |
| EU RoHS Directive 2011/65/EU                                    | Compliant   |
| EU ELV Directive 2000/53/EC                                     | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016                   | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006                          | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content   | Low Halogen - Br, Cl, F, I < 900 ppm per  |



homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 172782-5  
LOW PROFILE MINI AMP-IN



TE Part # 172781-4  
LOW PROFILE MINI AMP-IN  
(AWG#30-#26)Y-TY




TE Part # 172782-7  
LOW PROFILE MINI AMP-IN




TE Part # 172781-3  
LOW PROFILE MINI AMP-IN  
(AWG#30-#26)X-TY


Customers Also Bought

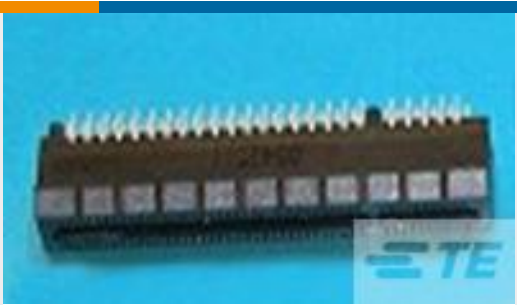


TE Part #5650118-2  
CONN SEC II 10 POS 100C/L R/A

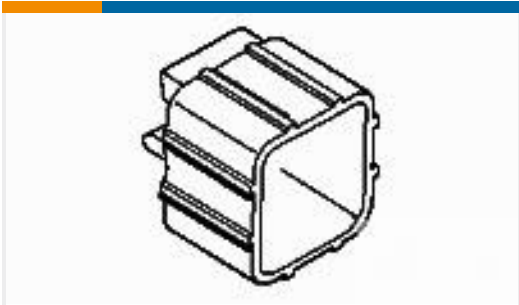


TE Part #368051-1  
E-J MK-II(+) 16P CAP DBL

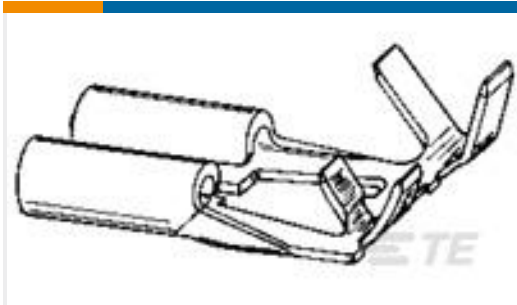


TE Part #180453-2  
FF 312 REC 1-2.5MM2 TPBR




TE Part #280095-2  
FF 250 REC 0.3-0.8MM2 PTBR




TE Part #CR2100-000  
CPGI-WC-TG-TN-BULK



TE Part #2-2176349-6  
CRGCQ 2512 1K2 1%



TE Part #DT04-3P-P004  
REC, 3P, GRY, N



TE Part #1-962344-1  
2P FLACHSTCK-GEH2,8



Documents

CAD Files

3D PDF

English

Customer View Model

ENG\_CVM\_172520-3\_G1.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_172520-3\_G1.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_172520-3\_G1.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_172520-3\_E.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_172520-3\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_172520-3\_E.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS

English

Product Specifications

Application Specification

English

Application Specification

English



[Agency Approvals](#)

[UL Report](#)

English