


## Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- High current capability
- Low forward voltage drop
- High temperature soldering guaranteed: 260°C/10 seconds at terminals
- Component in accordance to RoHS 2015/863/EU



Package: GBU



Schematic Diagram

## Mechanical Data

- Case: GBU molded plastic body
- Terminals: Plated leads solderable per MIL-STD-750, method 2026
- Mounting position: Any

## Applications

Used in AC/DC bridge full wave rectification for SMPS, lighting ballaster, adapter, charger, home appliances, office equipment and telecommunication applications.

## Maximum Ratings and Electrical Characteristics


(Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, resistive or inductive load. For capacitive load, derate current by 20%.)

Parameters	Symbol	GBU 1001	GBU 1002	GBU 1004	GBU 1006	GBU 1008	GBU 1010	Units
Maximum Reverse Peak Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current, (See Fig 2)	$I_{F(AV)}$	10.0						A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	$I_{FSM}$	220						A
Rating for Fusing (t=8.3ms)	$I^2t$	200						A <sup>2</sup> S
Maximum Instantaneous Forward Voltage at 5.0A DC	$V_F$	1.00						V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_J=25^\circ\text{C}$	5						$\mu\text{A}$
	$T_J=125^\circ\text{C}$	100						$\mu\text{A}$
Typical Junction Capacitance <sup>1</sup>	$C_J$	60						pF
Typical Thermal Resistance, Junction-Ambient <sup>2</sup>	$R_{\theta JA}$	25						°C/W
Typical Thermal Resistance, Junction-Case <sup>2</sup>	$R_{\theta JC}$	2.2						°C/W
Operating Temperature Range	$T_J$	-55 to +150						°C
Storage Temperature Range	$T_{STG}$	-55 to +150						°C


Notes:

1. Measured at 1MHz and applied reverse voltage of 4.0 Volts.
2. Unit mounted on 100mm x 100mm x 1.6mm copper plate heatsink.


## Ratings and Characteristics Curves

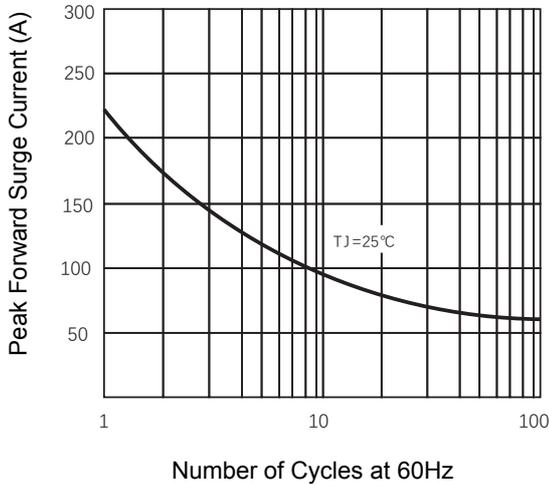


**Figure 1. Maximum Forward Surge Current**

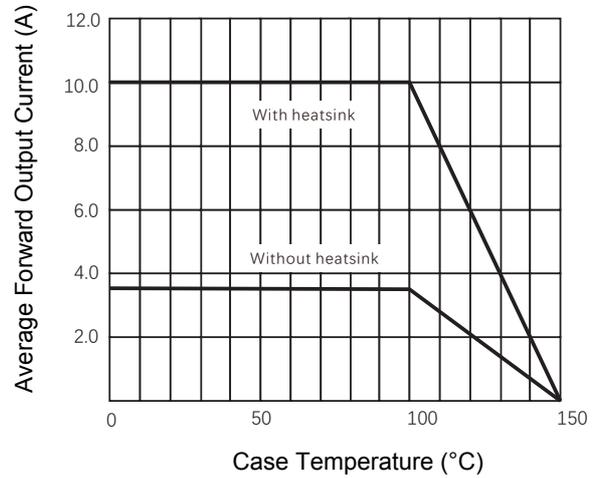

**Figure 2. Forward Current Derating Curve**

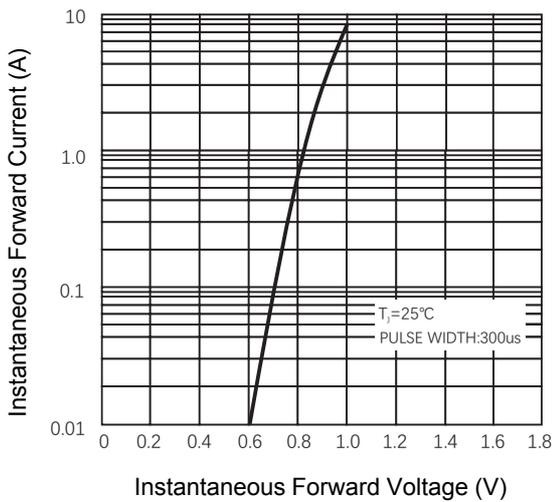


**Figure 3. Typical Forward Characteristics**

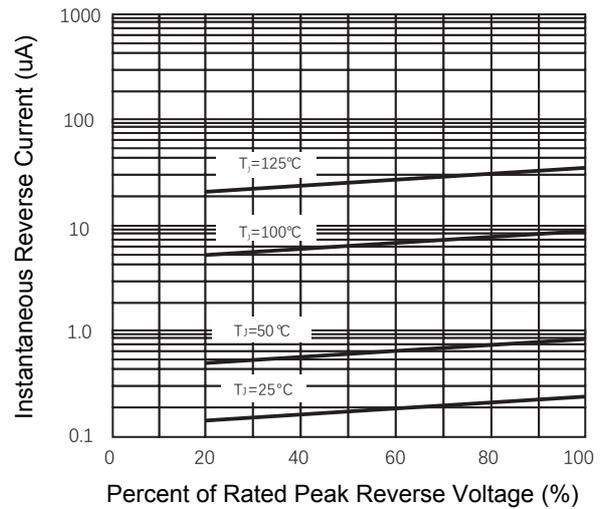

**Figure 4. Typical Reverse Characteristics**

## Package Outline Dimensions (GBU)

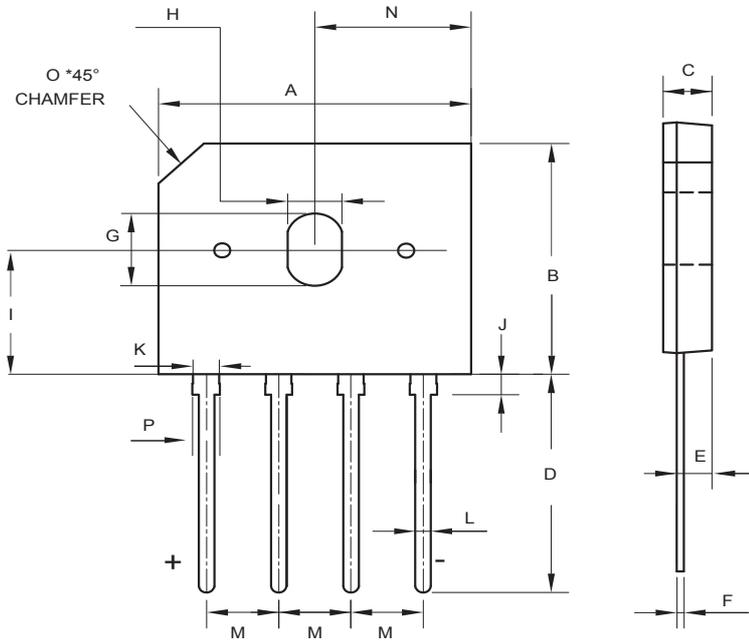

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	21.80	22.20	0.860	0.874
B	18.30	18.70	0.720	0.736
C	3.35	3.55	0.132	0.140
D	17.50	18.50	0.689	0.728
E	2.30	2.70	0.091	0.106
F	0.42	0.52	0.017	0.020
G	5.50	6.30	0.217	0.248
H	3.50	4.10	0.138	0.161
I	9.50	10.50	0.374	0.413
J	2.40	2.60	0.094	0.102
K	2.05	2.25	0.081	0.089
L	1.05	1.25	0.041	0.049
M	4.83	5.33	0.190	0.210
N	10.90	11.10	0.430	0.437
O	3.20 TYP		0.126 TYP	
P	2.15	2.35	0.085	0.093