

A

B

C

D

E

F

G

1

2

3

4

5

6

7

8

9

10

MAPX

MODIFICATION

DATE

A

B

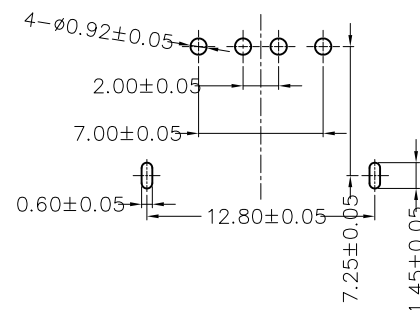


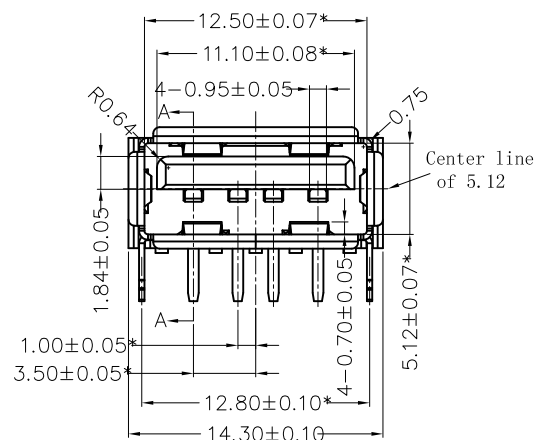
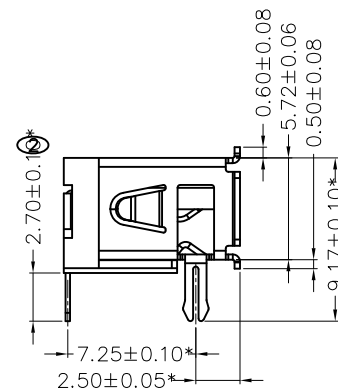
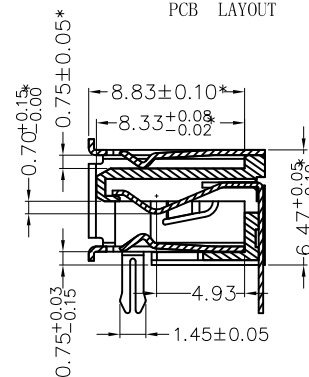
C

D

E

F

G

FRONT EDGE OF CONNECTOR
PCB LAYOUT

SECTION A-A

NOTES:

1. HOUSING: SEE NOTES.
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:

- CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN

2. MECHANICAL CHARACTERISTIC:

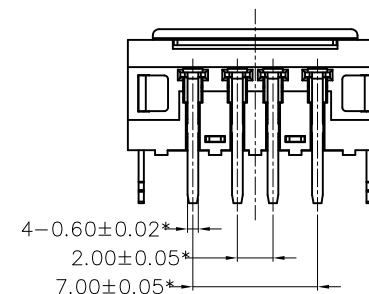
- INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE: 3~35N

3. ENVIRONMENTAL:

- OPERATING TEMPERATURE: -55°C+85°C

4. Contact finish:

- 01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"



产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.15	X.	±5.°
.X	±0.10	.X	±2.°
.XX	±0.05	.XX	±1.°
.XXX	±0.03	.XXX	±0.5°

深圳市精拓金电子有限公司

单位	MM
UNITS	MM
比例	1:1
SCALE	1:1
日期	2012.06.15
DATE	2012.06.15

制图	审核	核准
DRAWING	CHKD	APPD

Z-Y-B
角法
VIEW

制图料号
PRODUCT PART NO.
产品名称
PRODUCT NO.

910-151A1012D10100

AF10.0C款前两脚有边铁壳PBT
白胶6.5DIP

版本
VER

A0
