

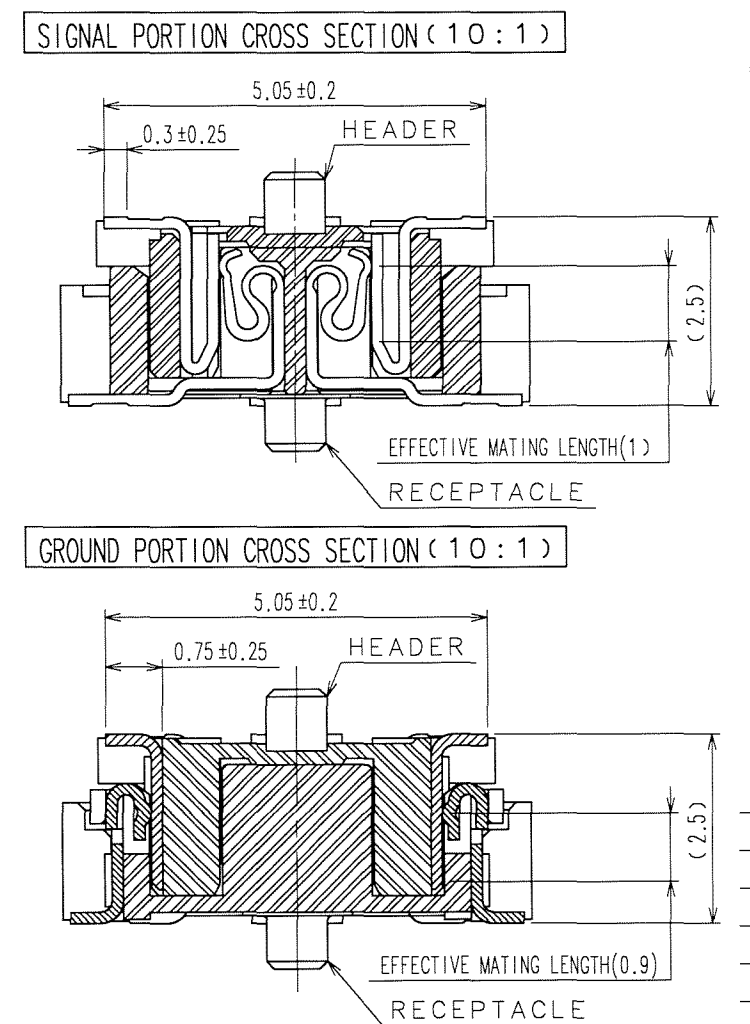


3. 4 PHOSPHOR BRONZE		TIN-PLATING		2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μ min.	
1 LCP		BEIGE UL94V-0				LEAD AREA : GOLD FLASH	
NO. MATERIAL		FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD) CL				DRAWN A. SUZUKAWA 06. 11. 01	DESIGNED <i>H. Nakamura</i> 06. 11. 01	CHECKED <i>Y. Ozawa</i> 06. 11. 01	APPROVED <i>H. Okawa</i> 06. 11. 02
 DRAWING NO. EDC3-152599-22				PART NO. FX11A-100P/10-SV(92)			1/2
SCALE 5 : 1 UNITS mm				CODE NO. CL573-0504-5-92			
 HIROSE ELECTRIC CO., LTD.							

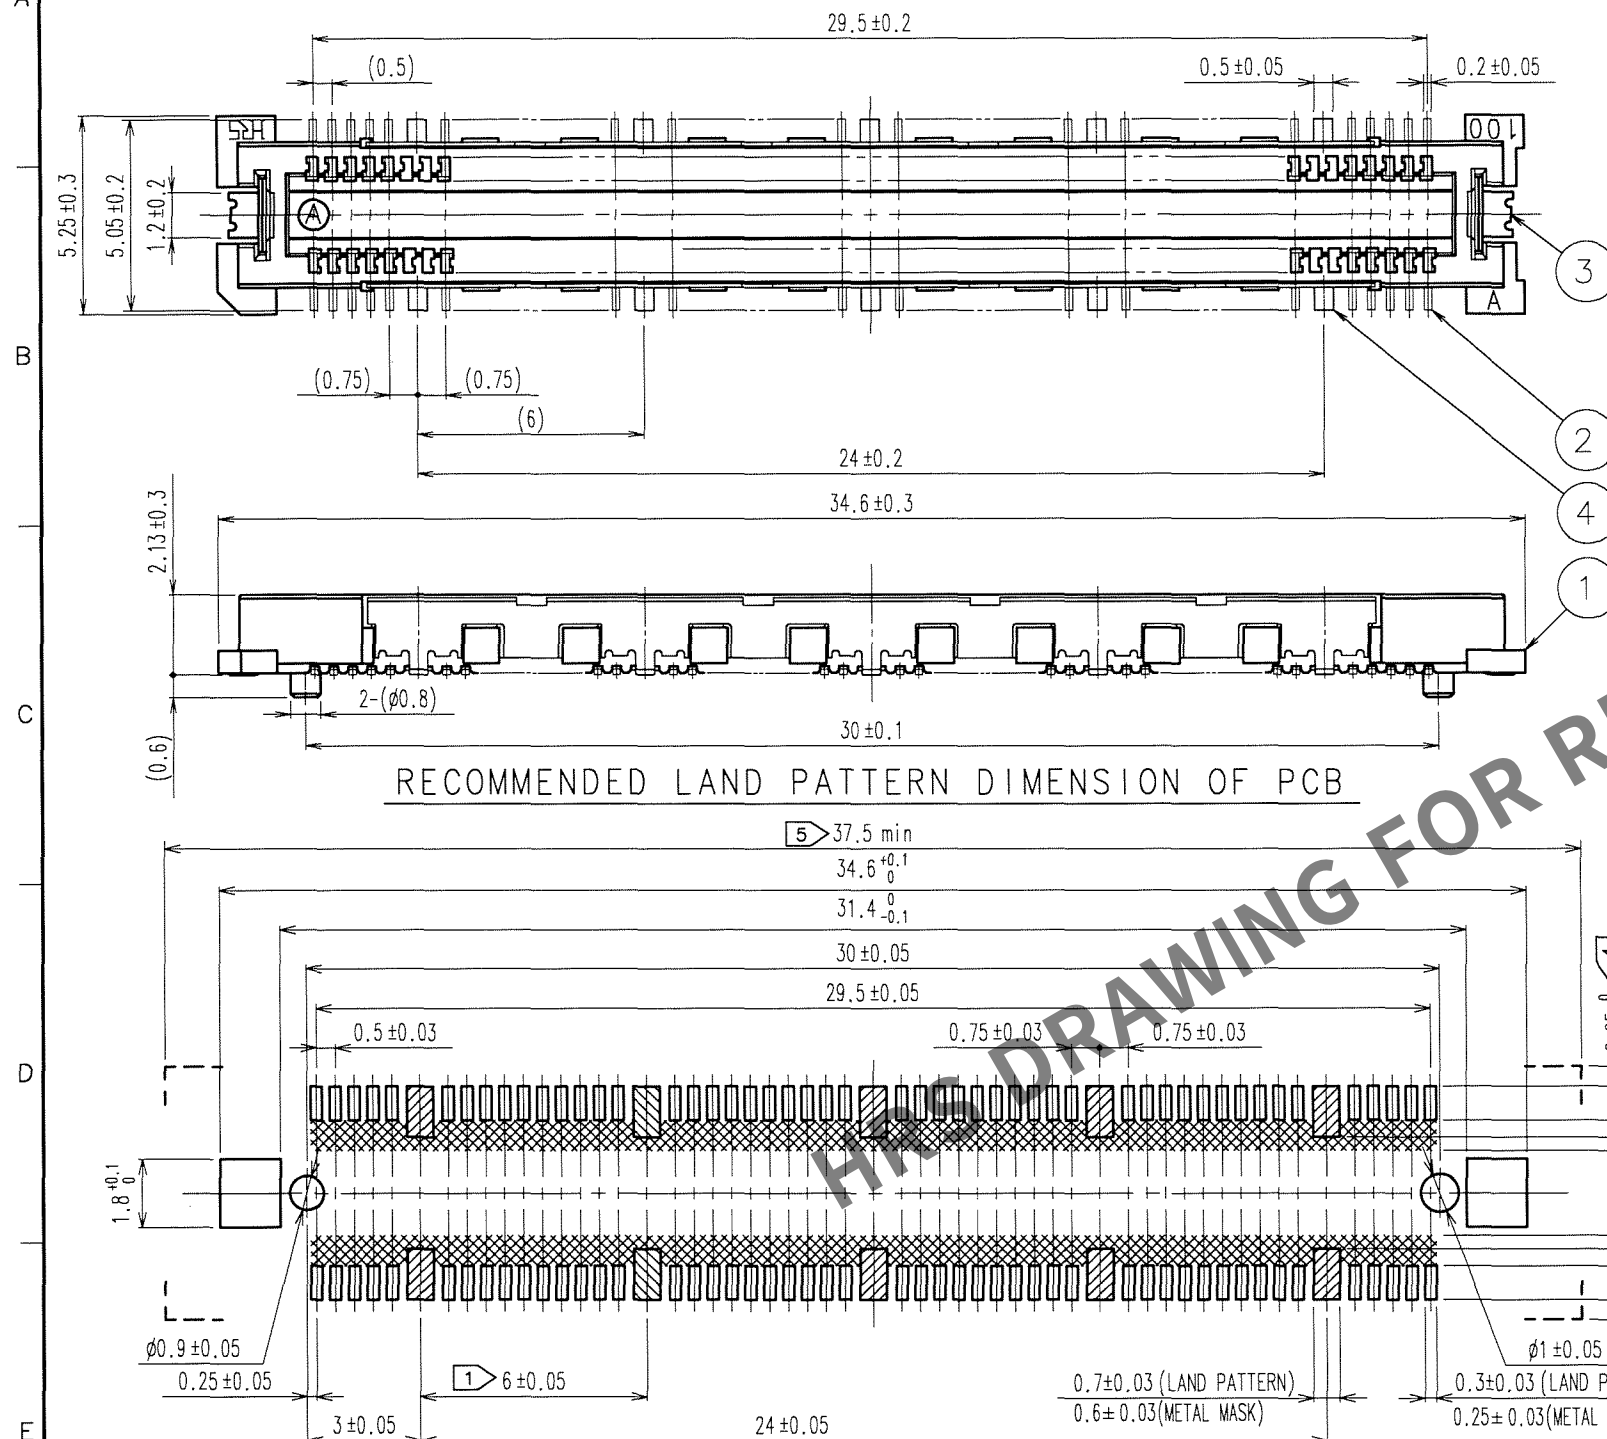

NOTES ① 10 HATCHED  PARTS:GROUND CIRCUIT.
2 SMT LEAD-COPLANARITY:0.1 MAX.
3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR
LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
⑤ DO NOT MOUNT OTHER DEVICES ONTO   AREA ,OR MATING PAIR
CANNOT BE MATED.
6 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
PCK

