
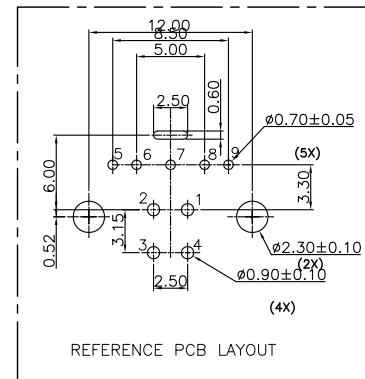

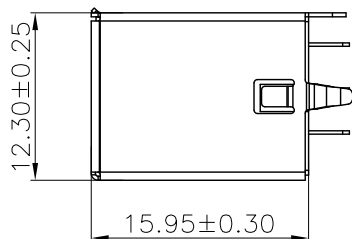
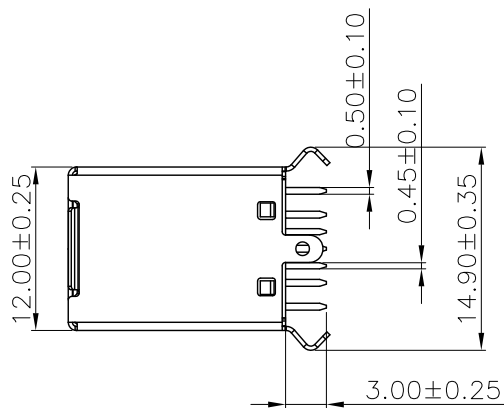
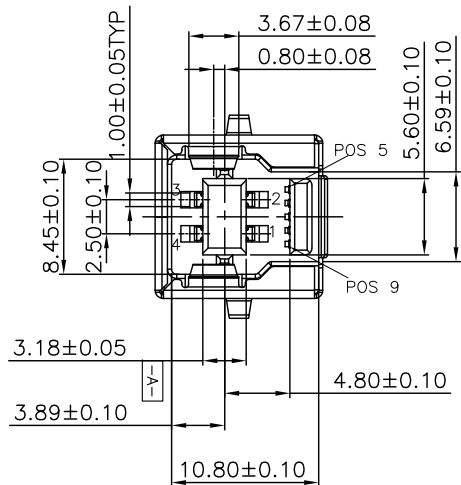
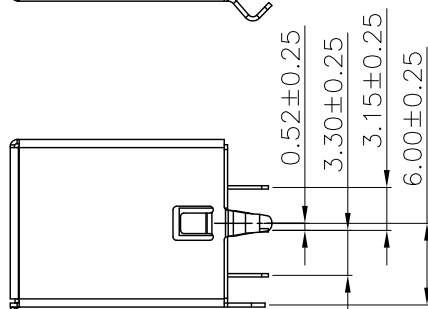
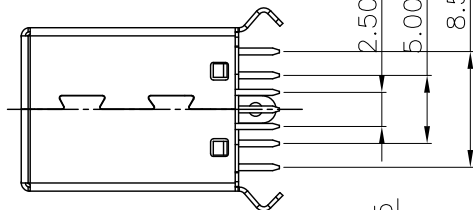




SPECIFICATIONS:

Contact current Rating:

1.8 Amperes for pin1&pin4.

0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)

Insulation resistance:100Megohms Minimum.

Contact Resistance:

30mΩ Max for pin1&pin4

50mΩ Max for other contacts

Mechanical Characteristics:

Mating Force:35 Newtons.Maximum

Unmating Force:10 Newtons.Minimum.

MATERIAL: 8N Min After Durability

Housing: PBT+30%GF 94V-0 COLOR:SEE TABLE

Contact: copper alloy (T=0.25mm)

Shell: SEE TABLE

PLATING:

Contact: Au Plated(SEE TABLE) on contact area

Tin Plated on solder area

Nickel underplating over all

Shell: Nickel Plated

operating Temperature:-55° to+85°

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.35	X.	±5°
.X	±0.30	.X	±2°
.XX	±0.20	.XX	±1°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM
比例 SCALE	1:1
日期 DATE	2021-04-15

制图 DRAWING	尹先华
审核 CHKD	郭治富
核准 APPD	黄国荣

制图料号 PRODUCT PART NO.	921-112A1050Y10200		
产品名称 PRODUCT NO.	BF 180度3.0弯脚铜壳蓝胶		
角法 VIEW		版本 VER	A0