



ROHS

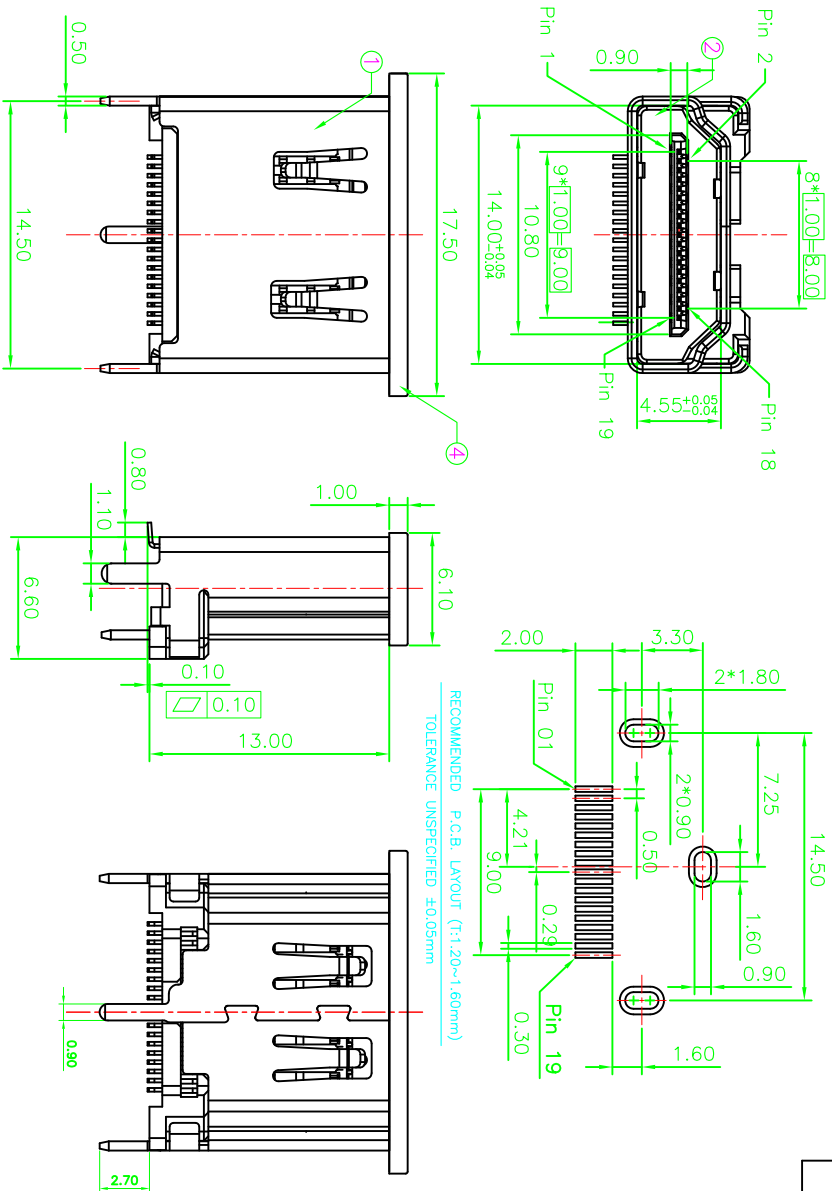

RECOMMENDED P.C.B. LAYOUT (T:1.20~1.60mm)
TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATIONS

- 1.OPERATING CURRENT: 0.5A MAX.
- 2.OPERATION TEMPERATURE: -25°C TO +85°C
- 3.DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADJACENT TERMINAL(UNMATE)
300Volts AC BETWEEN ADJACENT TERMINAL(MATE)
- 4.INSULATION RESISTANCE:
100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)
- 5.HDMI SPECIFICATION COMPLIANCE
- 6.盐雾测试: 国际标准要求, 温度35℃, 浓度5%的盐水, 24H, 用清水洗净后观测, 产品无氧化、无锈蚀
- 7.寿命测试: ≥10000次



ROHS COMPLIANCE

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

公差一览表	TOLERANCE UNLESS OTHERWISE
X. ±0.25	X. ±5.°
.X ±0.15	.X ±2.°
.XX ±0.10	.XX ±1.°
.XXX ±0.05	.XXX ±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

4	DUST COVER	1	THERMOPLASTIC UL94V-0
3	CONTACTS	19	COPPER ALLOY, GOLD PLATED OVER NICKEL ON CONTACT AREA AND 80U" MIN. TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	SPCC,NICKEL PLATED
ITEM	NAME	Q'TY	NOTES

单位	MM	制图	YANG	制图料号	920-762A2021B10103
比例	1:1	审核	郭治富	产品名称	HDMI 19Pin F 13.0/15.7mm直立式插座型
日期	2020-05-22	核准	黄国荣	角法	AO
DATE	2020-05-22	APPD	APPD	版本	VER