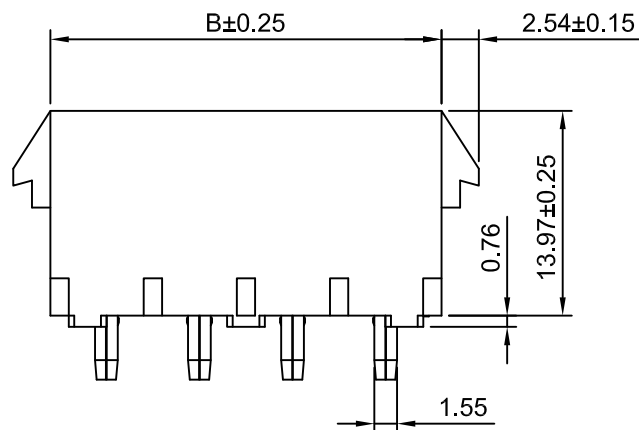

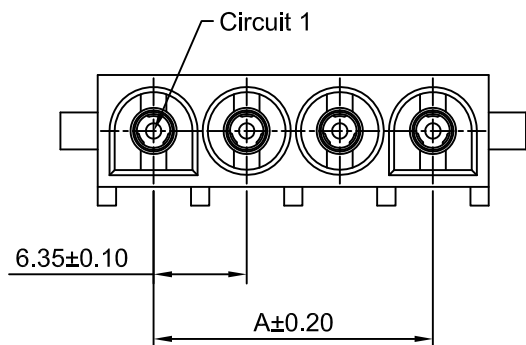


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

C6351WV-XP-F - *** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(White),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Pin Material:Phosphor Bronze

Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6351WV-2P-F	6.35	13.97
C6351WV-3P-F	12.70	20.32
C6351WV-4P-F	19.05	26.67
C6351WV-5P-F	25.40	33.02
C6351WV-6P-F	31.75	39.37
C6351WV-7P-F	38.10	45.72
C6351WV-8P-F	44.45	52.07

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1			
DRWN	CHK'D	APPR	6.35mm PITCH VERTICAL SINGLE ROW WAFER -FEMALE TYPE		
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances					
x,xx±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION	DRAWING NO. C6351WV-XP-F	REV A2
					