

5

4



3

2


1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

No1. contact

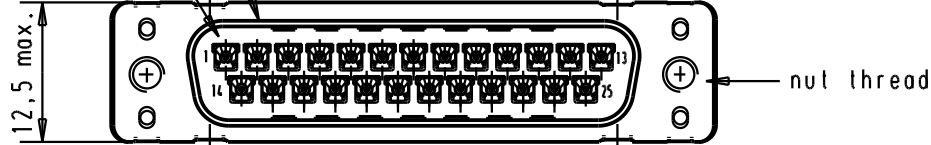

Printed board layout
component side

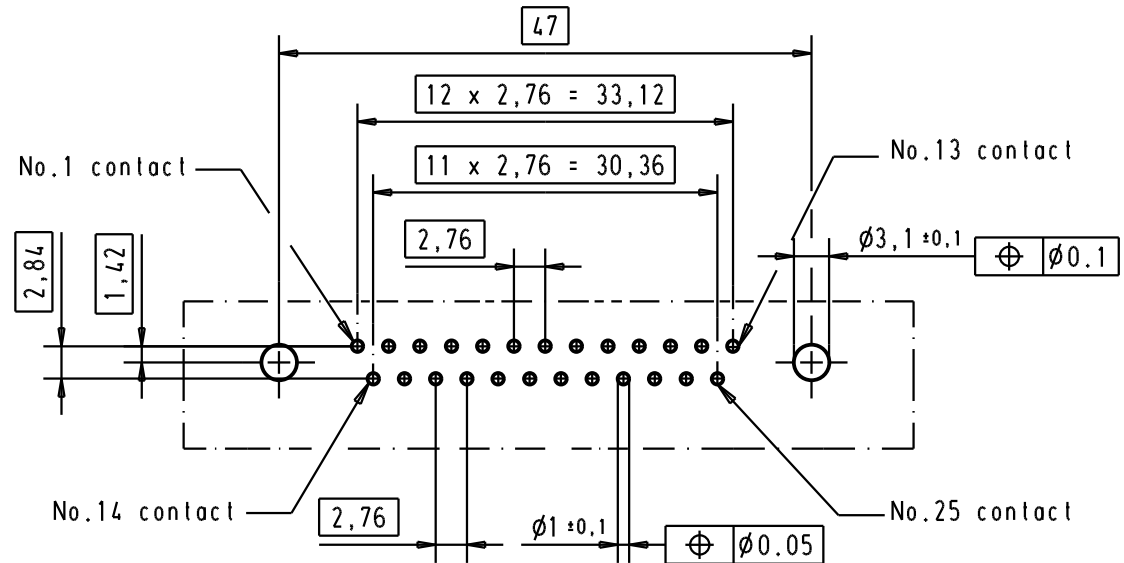

Connector retention and insertion forces on the PCB = 25 / 80 Newtons.

09 65 361 3711

M3

1

Dat.

Name



D-Sub, 25 poles,
male, straight
with solder pins 3,7
nuts and grounding board lock.

Maßstab/
Scale

09 65 361 6711

M3

2

Detail.

05/03/02

CV

1.5:1

09 65 361 7711

M3

3

Insp.

09 65 361 3712

4-40 UNC

1

31892

22/04/04

JH

Stand.

09 65 361 6712

4-40 UNC

2

31523

11/07/03

TCP

09 65 361 7712

4-40 UNC

3

29723

05/03/02

CV

HARTING EURL
F-95972 Paris



TB 09 65 361 x71x

Blatt/ Page

1

Part number

Nut thread

Performance level

Mod.

Dat.

Name

Sub.