


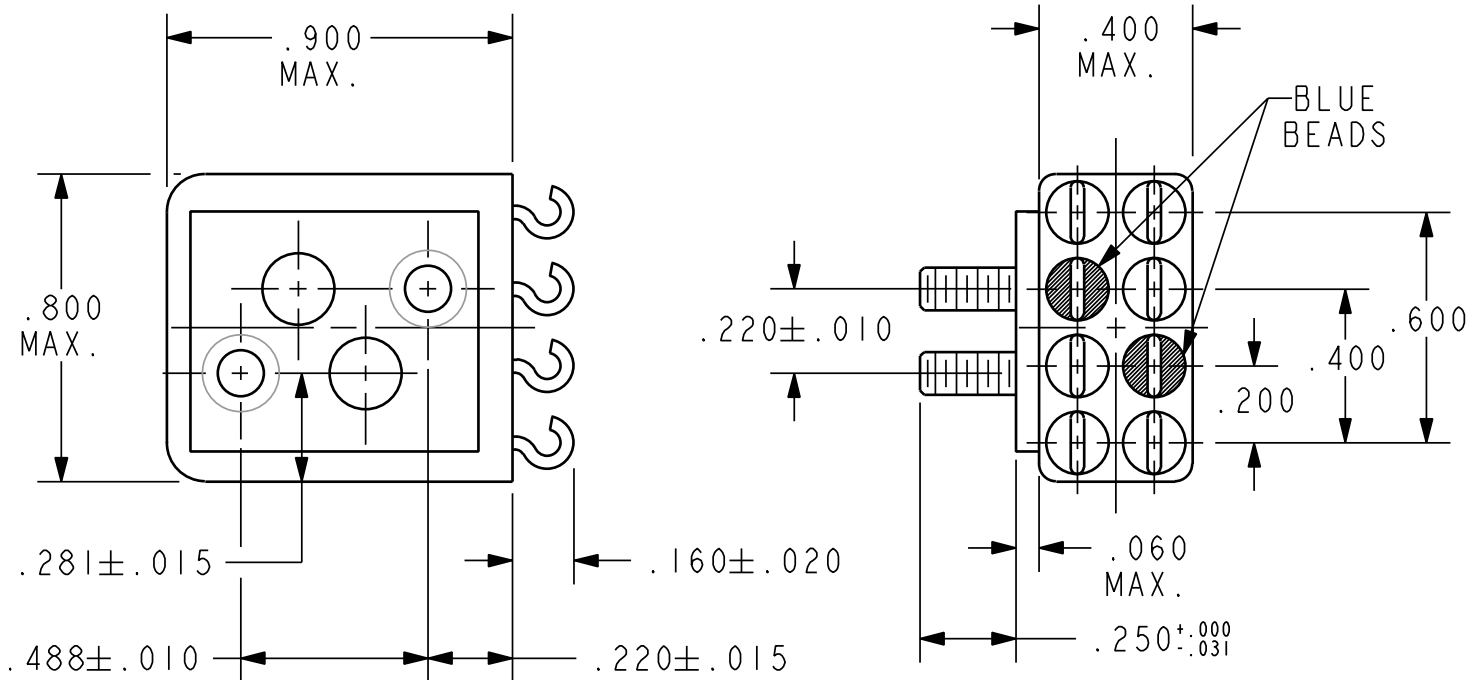

REV. A

DCO 144181


COIL: @ 25°C
 RESISTANCE 600 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 22.5 mADC
 MUST RELEASE 14.0 mADC MAX., 4.5 mADC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 2000 Hz @ 30 g's
 SHOCK 90 g's 11 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 5 MS MAX.
 RELEASE TIME 4 MS MAX.
 CONTACT BOUNCE 2.5 MS MAX.

CUSTOMER DATA SHEET

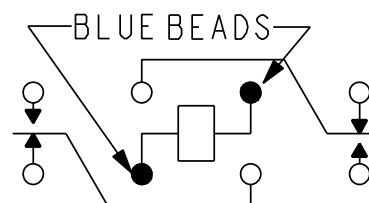

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 24APR2006 CK. J.M.B. 4/24/06

tyco
Electronics

©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. CII STD
 CUST. NO. REV.

TYCO NUMBER
 2-1617016-0

CII PART NUMBER
 3SBK6072H2