

Actuator

45-
2924.1000.113



<https://eao.com/p/45-2924.1000.113>

Your product:



45-2924.1000.113 Actuator

FRONT

Front dimension:	Ø 29,5 mm
Front bezel colour:	Black
Front bezel material:	Plastic
Front form:	round

MOUNTING

Mounting type:	Panel mounting
Design:	raised
Mounting cut-out:	Ø 22.3 mm

MECHANICAL CHARACTERISTIC

Weight:	0.054 kg
Switching action:	Maintained - Rest (a) - Maintained
Switching positions:	3 positions
Switching angle:	45° left / 45° right / -45° ... +45°
Mechanical lifetime:	1 Mio. cycles of operation
Operating frequency:	1 800/h

AMBIENT CONDITION

IP front protection:	IP66, IP67, IP69K
Operating temperature:	- 25 °C ... + 70 °C
Storage temperature:	- 40 °C ... + 80 °C


Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6
Vibration resistance:	According to IEC 60068-2-6: 10 ... 500 Hz: 5 g
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

CERTIFICATE

RoHS:	RoHS compliant
REACH:	REACH compliant

OTHER


Housing material:	Plastic
Short Description:	Actuator, Ø 22.3 mm, Ø 29.5 mm, round, Black, Plastic, Maintained - Rest (a) - Maintained, IP66, IP67, IP69K
Hints:	The standard lock: RONIS, T254
Mounting cut-outs:	

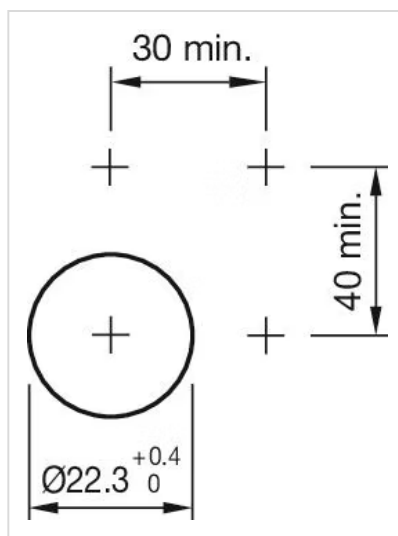

Wiring diagrams:



Switching positions:

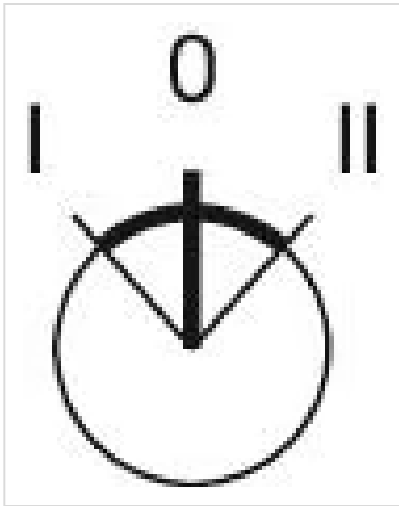

Dimension drawings:

