
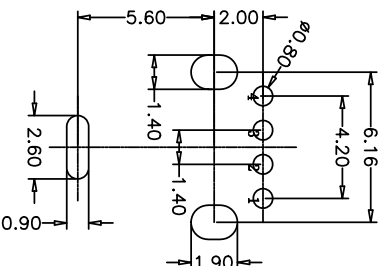
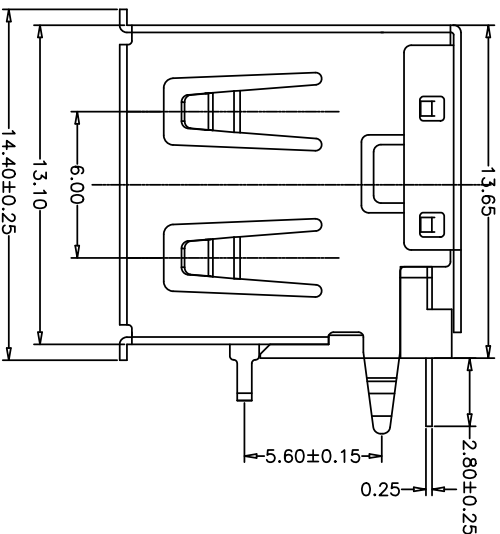
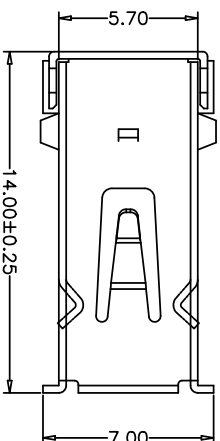


RoHS

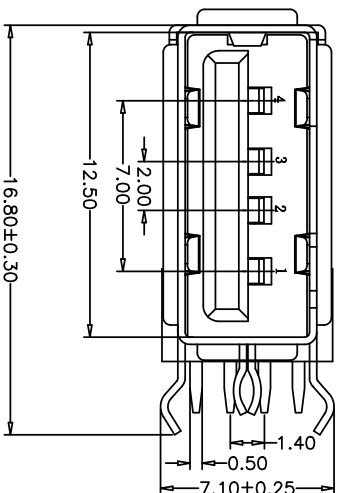

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ± 0.05

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea level
- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:0.7kgf (MIN)
- 端子保持力: Terminal Retention
1.0kgf (MIN)
- 寿命: 1500次
原材料:Material:
1. 塑胶:Housing:pbt/LCP
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell:SPCC/C2680
电镀:Finish:
1. 端子Contact: Au G/F u" Plated on contact area
Tin50u" Plated on solder area
Nickel 50u" Plated underplating over all.
2. 外壳Shell: Nickel 50u"Min plating over all.

产品图

PRODUCT CHART DWG

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

公差一览表

TOLERANCE UNLESS OTHERWISE

	X	X'	X''	X'''
1	± 0.35	X'	$\pm 5'$	
2	± 0.30	X'	$\pm 2'$	
3	± 0.25	XX'	$\pm 1'$	
4	± 0.10	XXX'	$\pm 0.5'$	

深圳市精拓金电子有限公司

单位	MM	制图	L S S	产品料号	906-452A1021D10200		
UNITS		DRAWING		PRODUCT PART NO.			
比例	1:1	审核	G Z F	产品名称	API 4.0 潜水艇外弯90°型脚有边		
SCALE		CHKD		PRODUCT NO.	制式BPT黑胶		
日期	2021/03/10	核准	黄国荣	角法			
DATE		APPD		NEW			
				版本	AO		
				VER			

您正在使用 ZWECAD 2022 个人版，不得用于商业用途，详情请咨询 4005-182-598。