



M8 Connector

TE Internal #: T4010019041-000

Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M8 Connector, Standard Circular Connectors

[View on TE.com >](#)

Connectors > Circular Connectors > Standard Circular Connectors > M8 Field Installable



Connector System: **Cable-to-Cable**
Connector Mounting Type: **Cable Mount (Free-Hanging)**
Number of Positions: **4**
Sealable: **Yes**
Connector & Contact Terminates To: **Wire & Cable**

[All M8 Field Installable \(16\)](#)

Features

Product Type Features

Product Type	Connector Assembly
Accessory Color	Black
Assembly Requirement	Factory Assembled
Assembly Type	Electrical Connector
Circular Connector Shell Type	Metal-Shell
Connector Product Type	Connector Assembly
Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Metal

Configuration Features

Factory Installed Backshell	With
-----------------------------	------



Keying	A
Number of Positions	4
Number of Power Positions	0
Number of Signal Positions	4
Contacts Preloaded	Yes

Electrical Characteristics

Operating Voltage	30 VAC
-------------------	--------

Body Features

Peripheral Seal Material	Silicone
Environmental Protection	IP67
O-Ring Material	Silicone
Environmental Protection Type	Elastomer Sealed
Shell Plating Material	Nickel
Shell Base Material	Copper Alloy
Circular Connector Insulation Material Type	Polyamide 66 GF25
Hermetically Sealed	Yes

Contact Features

Contact Current Rating (Max)	3 A
Reverse Gender	Yes
Circular Connector Contact Type	Socket

Mechanical Attachment

Mating Retention Type	Threaded Coupling
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Polarization Code	A
Mating Alignment Type	Keyed

Housing Features

Circular Connector Shell Size	12
-------------------------------	----

Dimensions

Wire Size	.25 – .14 mm²
-----------	---------------

Usage Conditions

IP Dust Sealing Level	6
-----------------------	---



IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]

Operation/Application

Durability Rating	100 Cycles
Circuit Application	Signal
Shielded	Yes

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Other

Field Serviceable	Yes
-------------------	-----

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (1.9% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

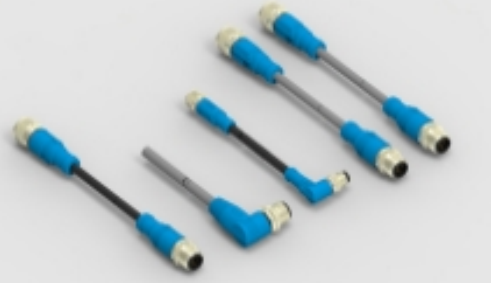
This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

 TE Part # T4011019041-000 M8,SCREW, MALE,S,SHIELD,4P,GOLD	 TE Part # 3-2172091-2 M8.FMLE.PNLREAR.4POS.PCBSTAND. RA.SHLD	 TE Part # 225499-E M8 MALE, A CODE, 4P, 13MM, THR	 TE Part # 3-2172093-2 M8.MALE.PNLREAR.4POS.RA. PCBSTND.SHLD
 TE Part # 224152-E M8 MALE, A CODE, 4P, 16.25MM SMT	 TE Part # 234235-E M8 MALE, A CODE, 4P, 16.25MM SMT	 TE Part # 235006-E M08 M 4 UNI L90H T * 301 * 094 * * Y VDS	 TE Part # 294941-E M8 ASSY KIT, MALE, 4P
 TE Part # T4062214004-020 RPC-M8-4MR-2.0SH-M8-4FR-PVC	 TE Part # T4062214004-040 RPC-M8-4MR-2.0SH-M8-4FR-PVC	 TE Part # T4062224004-020 RPC-M8-4MR-2.0SH-M8-4FR-PUR	 TE Part # T4062224004-040 RPC-M8-4MR-4.0SH-M8-4FR-PUR

Also in the Series | M8 Connector

 Connector Caps & Covers(5)	 Connector Hardware(4)	 M8/M12 Cable Assemblies(147)	 Standard Circular Connectors(106)
---	--	---	--

Customers Also Bought



TE Part #2273000-1
M8 x 1.0 straight plug Pigtail

TE Part #7-1879215-1
CPF 0402 24K9 0.1% 25PPM 1K RL

TE Part #4-1879208-3
CPF 0402 560R 0.1% 25PPM 1K RL

TE Part #1986692-2
STR PLUG SPRING TYPE RH 2P, 3.50 mm

TE Part #T4112011031-000
M12 F, 3P GOLD A_CODE RA SHIELDED PG7

TE Part #2083112-4
CABLE ASSY IND. USB-IND. USB TYPE A

TE Part #3-2176337-4
CRGCQ 0402 5K6 1%

TE Part #T4111411041-000
M12 M, 4P GOLD B_CODE S SHIELDED PG7

TE Part #109917-E
IBRIDGE RA 05 SMT 105 1 TOR J 3 109913 I

Documents

Product Drawings
M8,SCREW, FEMALE,S,SHIELD,4P,GOLD

English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_T4010019041-000_C.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_T4010019041-000_C.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_T4010019041-000_C.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages



M8 / M12 Connector System Catalog

English

Product Specifications

Application Specification

English

Application Specification

English

Agency Approvals

UL

English