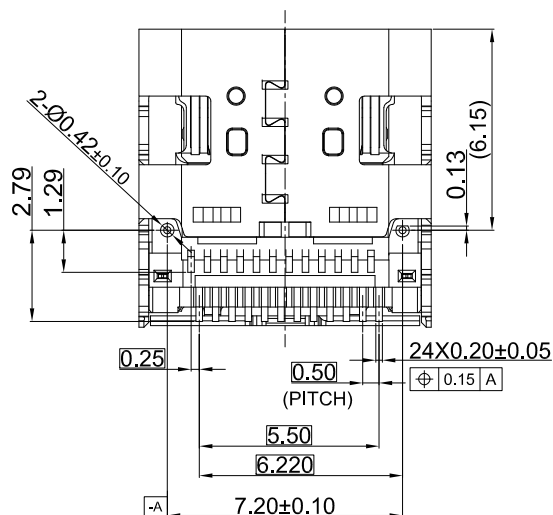
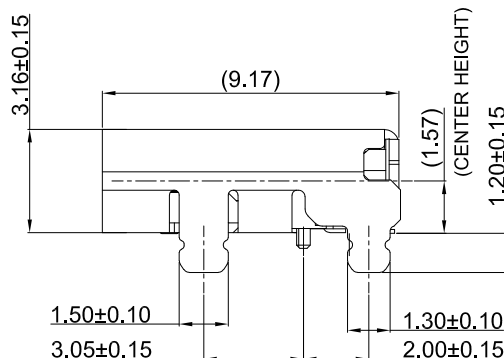
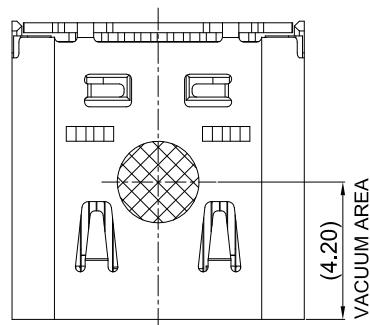
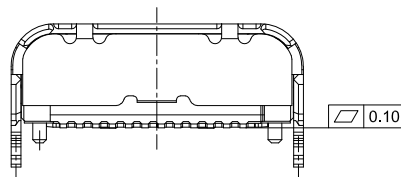
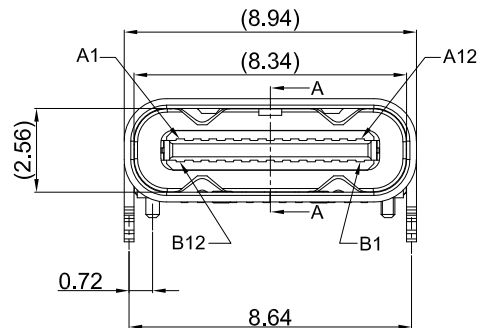


Note

specification:

- 1.1 rated current: 5.0 A
- 1.2 voltage rating: 5V AC
- 1.3 contact resistance: 40 m Ω max
- 1.4 insulation resistance: 100M Ω min
- 1.5 withstanding voltage: 100 VAC / minute
- 1.6 mating force: 5 ~ 20n
- 1.7 unmating force: 8 ~ 20n
- 1.8 durability cycle: 10000 cycles
- 1.9 operating temperature: - 40 ° ~ + 85

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
4	TERMINAL		24	C18140		MATING SIDE:SEE PART NO: SOLDER TAIL:Gold FLASH, 50u" NICKEL OVERALL.					T=0.12
3	SHELL		1	SUS304		NICKEL PLATING					T=0.30
2	MID PLATE		1	SUS301		NICKEL PLATING					T=0.15
1	MAIN HOUSING		1	PART: HF 30%镀锌, UL94 V-0, 黑色							BLACK UL94V-0
ITEM	DESCRIPTION		QTY	MATERIAL		FINISH					REMARK

BILL OF MATERIAL



Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN Li Qingqi

DATE 2022.04.21

Molde code:

CHECKED

DATE

GT-USB-7013C

APPROVED

DATE

<http://www.dg-switch.com>

REV.: X1


SCALE: 4:1

UNIT: mm


TEL:0769-82388879

SIZE: A4


SHEET: 1/1







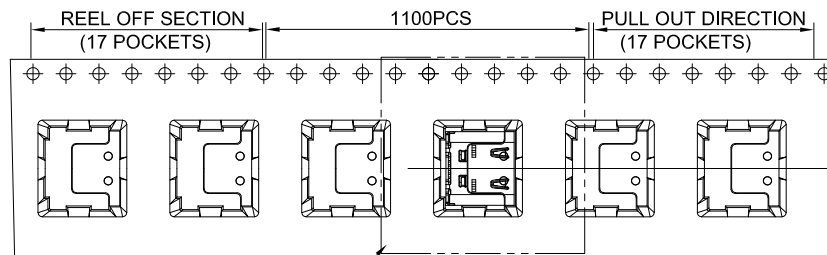

SEE DETAIL X

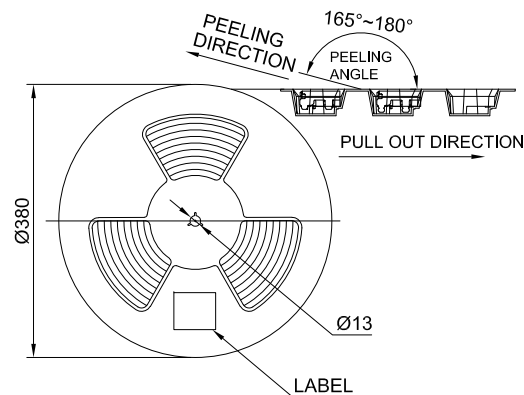

PULL OUT DIRECTION

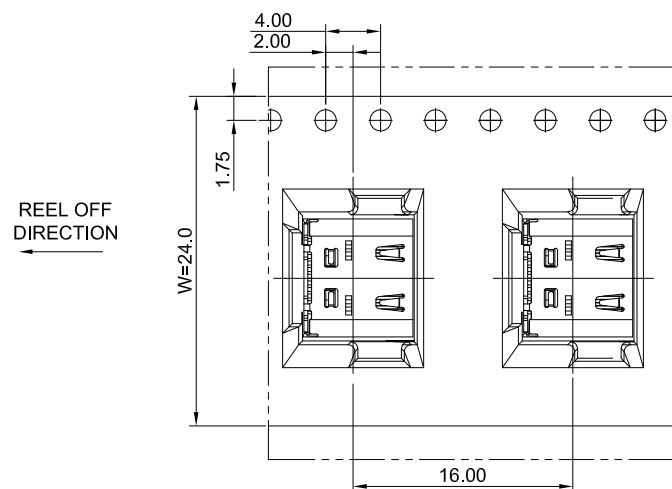

PAPER BOARD


REEL AND TAPE

REEL AND TAPE

PAPER BOARD

FOLDER
PAPER BOARD

CARTON



G-Switch Electronic (HongKong) CO.,Ltd.

Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

DESIGN Li Qingqi

DATE 2022.04.21

Molde code:

CHECKED

DATE

GT-USB-7013C

APPROVED

DATE

<http://www.dg-switch.com>

REV.: X1

SCALE: 4:1

UNIT: mm

TEL:0769-82388879

SIZE: A4

SHEET: 1/1

