

## RAFIX 22 QR - Signal indicator, round collar, high

1.74.505.511/1500



### General information

|                            |                   |
|----------------------------|-------------------|
| Form of lens               | high lens         |
| Color of lens              | transparent green |
| Legend insert accomodation | -                 |
| Form of collar             | round             |

### Dimensions

|                      |            |
|----------------------|------------|
| Dimensions of collar | ø 29.8 mm  |
| Overall height       | 14.2 mm    |
| Mounting depth       | 56.4 mm    |
| Mounting hole        | ø 22.3 mm  |
| Mounting grid        | 50 x 30 mm |

### Mechanical design

|                |          |
|----------------|----------|
| Mounting       | ring nut |
| Illuminability | yes      |


### Electrical characteristics



|                  |   |
|------------------|---|
| Protection class | - |
|------------------|---|

### Other specifications

|                                      |                                          |
|--------------------------------------|------------------------------------------|
| Degree of protection from front side | IP65 (DIN EN 60529)                      |
| Ambient temp. operating min.         | -25 °C                                   |
| Ambient temp. operating max.         | +70 °C                                   |
| Storage temperature min.             | -40 °C                                   |
| Storage temperature max.             | +80 °C                                   |
| Environmental restistance            | acc. to IEC 60068-2-14, -30, -33 and -78 |
| ROHS compliant                       | yes                                      |
| REACH compliant                      | yes                                      |

Panel cut-out to IEC 60947-5-1

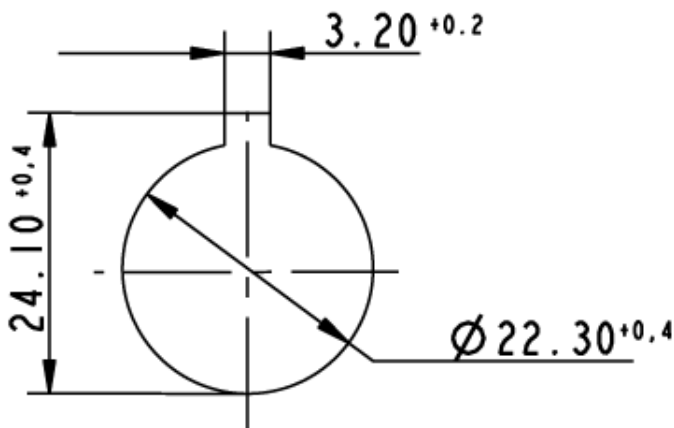

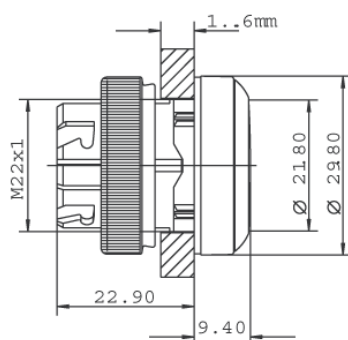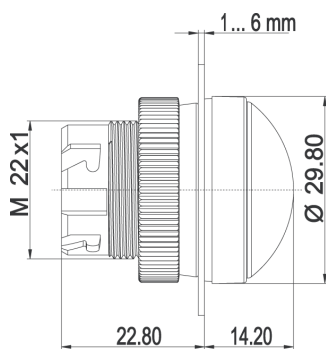

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RAFI:](#)

[1.74.505.511/1500](#)