


## Test plug - FTPR-3/20S - 3069977

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Test plug, With twist grip, color: gray



The figure shows the 14-pos. version

### Your advantages

- ✓ Easy and time saving, thanks to functional grouping of switching operations
- ✓ Cost-effective, thanks to the tailored, modular design and use of standardized CLIPLINE complete accessories
- ✓ Space saving, thanks to offset test socket arrangement
- ✓ Safe, thanks to guided operation with patented twist grip
- ✓ The integrated, robust switch contact is designed for the most stringent demands, and the use of high-quality materials ensures the transmission of signal currents, even after multiple actuations
- ✓ The automatically generated transformer short circuit and the shock-proof design ensure the highest degree of safety during measurement
- ✓ Maximum safety with leading and automatic transformer short circuit



### Key Commercial Data

|              |                                                                                      |
|--------------|--------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                 |
| GTIN         |  |
| GTIN         | 4055626395814                                                                        |

### Technical data

#### General

|                                                 |        |
|-------------------------------------------------|--------|
| Number of positions                             | 20     |
| Potentials                                      | 20     |
| Color                                           | gray   |
| Insulating material                             | PA     |
| Flammability rating according to UL 94          | V0     |
| Maximum power dissipation for nominal condition | 1.31 W |

#### Dimensions

## Test plug - FTPR-3/20S - 3069977

### Technical data

#### Dimensions

|        |          |
|--------|----------|
| Width  | 195.6 mm |
| Length | 86 mm    |
| Pitch  | 8.2 mm   |

#### Standards and Regulations


|                                        |    |
|----------------------------------------|----|
| Flammability rating according to UL 94 | V0 |
|----------------------------------------|----|

#### Environmental Product Compliance

|  |                |
|--|----------------|
|  | Lead 7439-92-1 |
|--|----------------|


### Drawings

Dimensional drawing

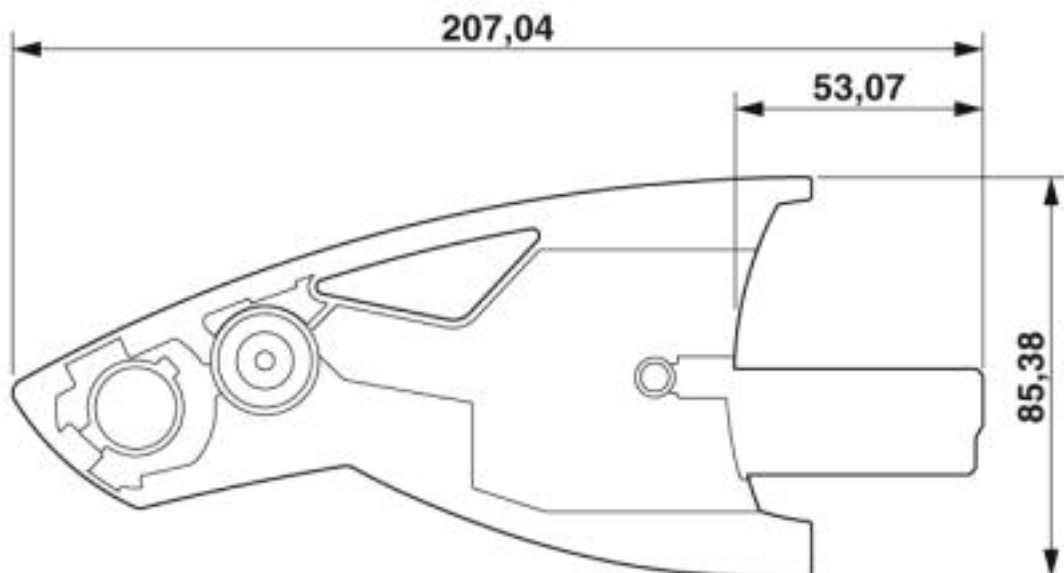

## Test plug - FTPR-3/20S - 3069977

Circuit diagram

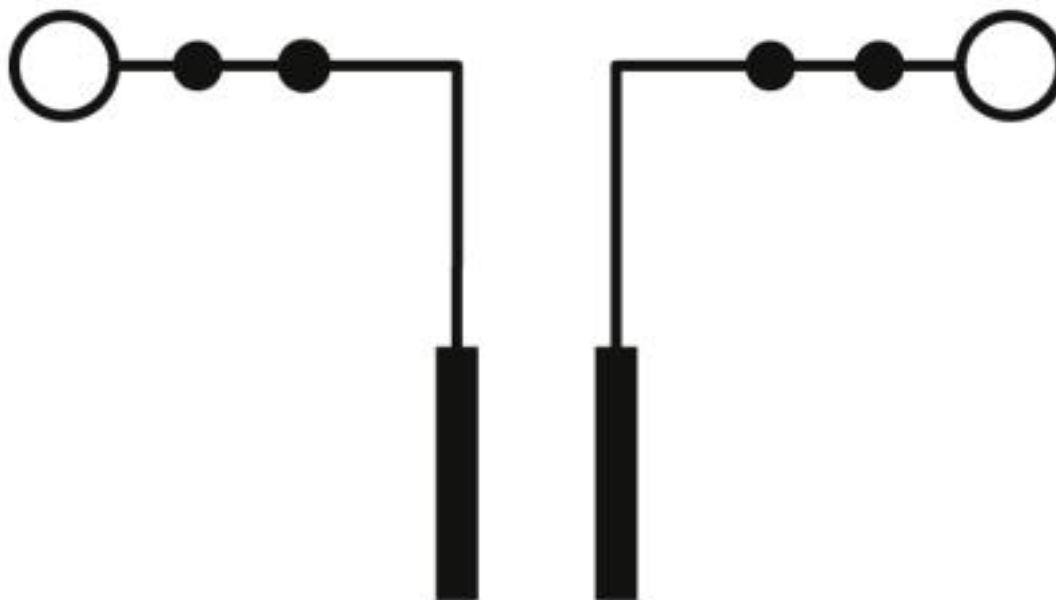

### Approvals

#### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

---

#### Ex Approvals

---

#### Approval details

UL Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 60425

cUL Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 60425

cULus Recognized



Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>