



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	ECN 8473 :UPD DWG TO MATCH NEW DESIGN , ADD NOTES 3 INFO	09/02/16	D.CUI
M	ECN 8516:ADDED NOTES 2 & 3 & 4 AND CONFIG TABLE	10/20/16	D.CUI
N	ECN 8803: REMOVE CONFIG VIEW AND NOTES 3 FROM THE DWG	06/06/17	D.CUI
O	ECN 8915:ADD COLOR CODE TO WIRES	09/08/17	D.CUI

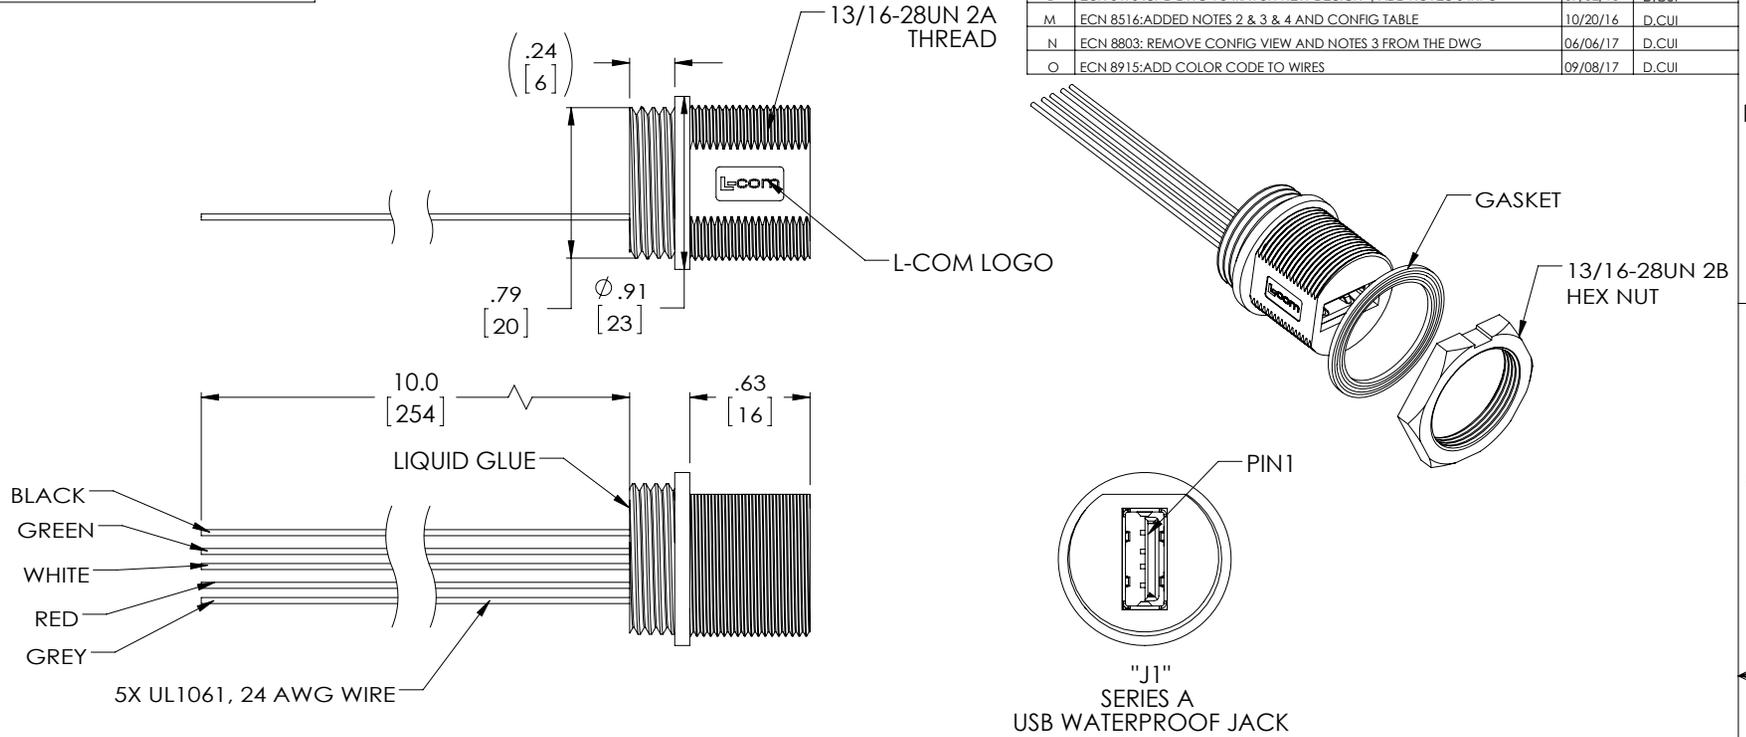

WIRING TABLE	
PIN#	COLOR
1	BLACK (PT BLACK 6C)
2	GREEN (PT 328C)
3	WHITE (RAL 9003)
4	RED (PT 1945C)
SHELL	GREY (PT 421C)



NOTES:

- 1.CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
- 2.L-COM LOGO STYLE MAY VARY PER L-COM SPECIFICATION
- 3.INGRESS PROTECTION RATING IS IP67 (J1 ONLY ,MATED)
- 4.CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	07/29/2003		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ±.005 [.13]	CHECKED BY D.PARHAM	08/01/2003	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY R.CARRICK	08/01/2003	USB WATERPROOF SERIES "A" BULKHEAD TO BLUNT END	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
REF			DWG. NO. WPUSBAF	REV. 
			SCALE: NONE	CAD FILE: WPUSBAF.SLDDRW
				SHEET 1 OF 1